

# PRESSURE TRANSMITTERS

Pressure and temperature monitoring solutions


Pressure switches



Thermostats



trafford

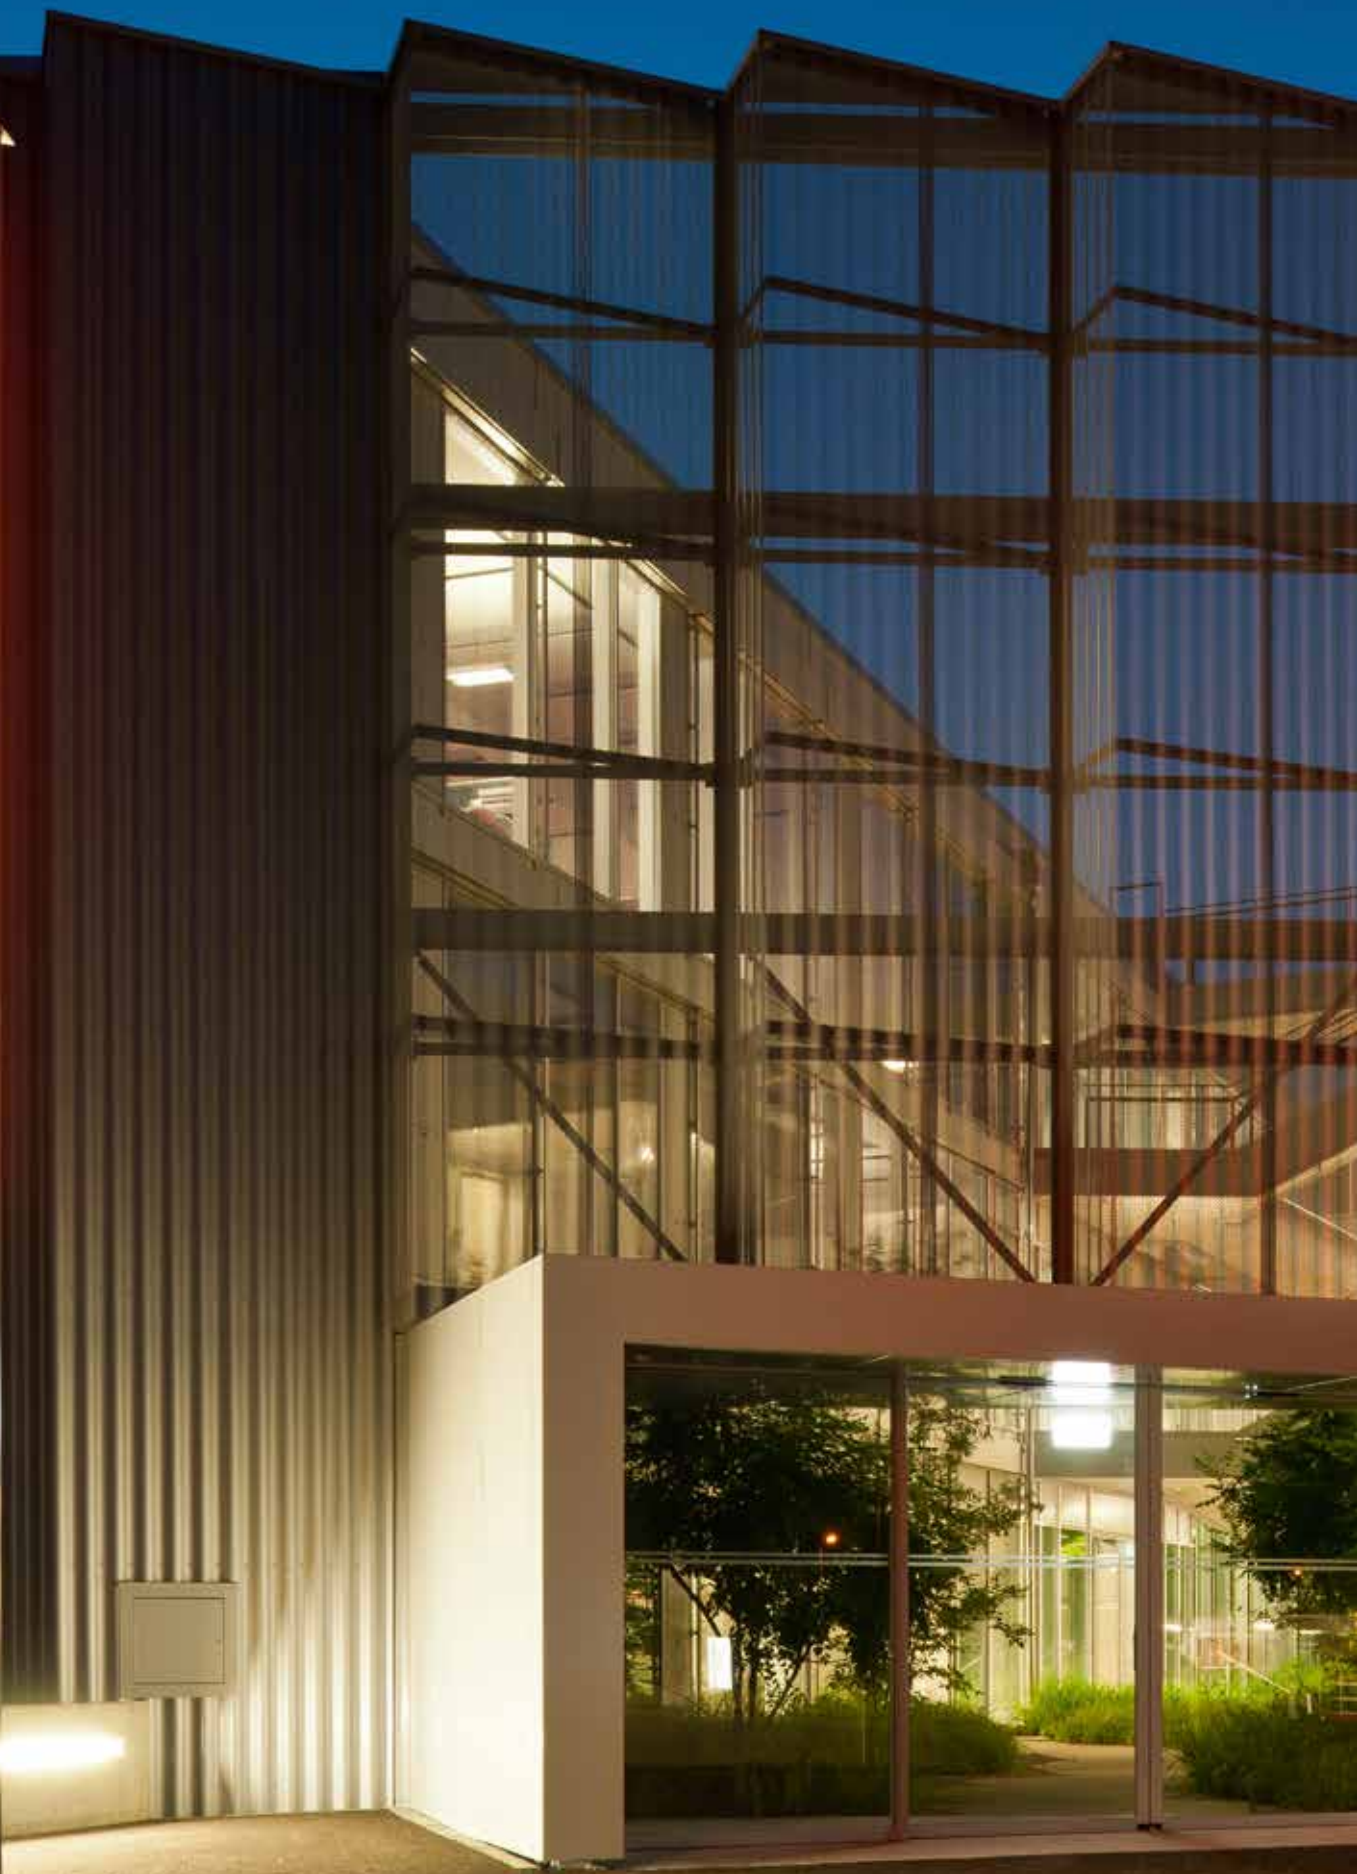

# Trafag – Sensors and monitoring instruments for pressure and temperature

Trafag, a Swiss-based company founded in 1942, is supported by a broad sales and service network in over 40 countries across the world. This allows Trafag to offer customers personalised and competent advice and ensures the best possible service. High-performance development and production departments not only guarantee the fast and reliable delivery of our high-quality and high-precision products, but also ensure that customisations can be implemented in a short time.



## Competent and customer-oriented

Technological competence, manufacturing expertise and customer-orientation form the three cornerstones of Trafag as a company. Trafag is a completely independent company with headquarters in Bubikon, Switzerland, and further manufacturing companies in Germany and the Czech Republic. A fifth of its employees in Switzerland are involved in the fields of research and development, production technology or applications engineering.

## Application and solution-oriented

The direct availability of these resources enables Trafag to be extremely flexible in the areas of development and production as well as in its perception and implementation of customer requirements. Thanks to modular engineering, Trafag is able to efficiently adapt its standard products to the specific needs of customers and to develop special OEM solutions.

## Market-oriented and always within reach

Trafag maintains an active presence in over 40 countries. A great number of customers in diverse industrial sectors such as mechanical engineering, hydraulics, engine manufacturing, shipbuilding, railway technology or high-voltage technology appreciate the cooperation offered by our technically competent customer advisory service.

## Adaptable and efficient

The ability to develop and manufacture its strategically important components in-house means that Trafag can both mass-produce and manufacture on a small scale at short notice. Rigorous quality management in accordance with ISO 9001, state of the art production facilities under clean room conditions and stringently monitored production processes ensure that Trafag meets the highest quality demands.



# Content

## Pressure switches and accessories



Trafag pressure transmitters and electronic pressure switches are used for measuring and evaluating pressure. Over the decades, they have proven themselves in a multitude of demanding applications in harsh environments. Superior technology and precise manufacturing ensure that the transmitters work perfectly, especially in areas where high requirements are placed on long-term stability, vibration resistance, electromagnetic compatibility, shock resistance or temperature insensitivity. Trafag pressure transmitters and electronic pressure switches are available in many different designs to suit pressure and electrical connections, measuring procedures, electrical output signals. They are available with Ex- and ship approvals as well as with railway conformity.

|  |           |
|--|-----------|
| Markets and applications                         | 6 - 7     |
| Pressure transmitters technology                 | 8         |
| Information on accessories                       | 9         |
| Overview Pressure transmitter                    | 10 - 15   |
| OEM solutions and sensors                        | 16 - 19   |
| Information on pressure switches and thermostats | 20        |
| Data sheets of the pressure transmitters         | 21 - 198  |
| Accessories                                      | 201 - 211 |
| Terminology for pressure measurement instruments | 212 - 215 |
| Information on Ex products                       | 216       |
| Fluid resistance guide                           | 217 - 219 |
| Conversion of pressure and temperature units     | 220 - 221 |
| Address directory Trafag worldwide               | 222 - 225 |

# Our products are at home where you are



## Shipbuilding



- Propulsion
- Pumps
- Ballast water treatment
- Steering
- Separators
- Tank level



## Hydraulics



- Construction machinery
- Agricultural machinery
- Injection molding machines
- Community vehicles
- Elevators



## Engines



- Common rail injection
- Cooling water
- Oil pressure
- Fuel pressure
- Turbo charger



## Railways

- Brake systems
- Pantograph
- Air compressors




## Water treatment

- Drinking water
- Waste water
- Desalination
- Pools
- Sluice steering
- Level control



## Various

- Chemical industry
- Mining
- Process technology
- Oil and gas
- Machine building industry
- HVAC

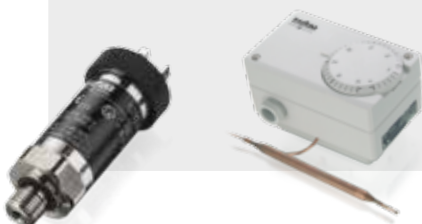

# Pressure transmitters

Trafag pressure transmitters and electronic pressure switches are used for measuring and evaluating pressure. Over the decades, they have proven themselves in a multitude of demanding applications in harsh environments. Superior technology and precise manufacturing ensure that the transmitters work perfectly, especially in areas where high requirements are placed on long-term stability, vibration resistance, electromagnetic compatibility, shock resistance or temperature insensitivity. Trafag pressure transmitters and electronic pressure switches are available in many different designs to suit pressure and electrical connections, measuring procedures, electrical output signals. They are available with Ex- and ship approvals as well as with railway conformity.

## Technology

Thin-film-on-steel (welded and O-ring free) or thick-film-on-ceramic pressure sensors are key components of Trafag pressure transmitters. Both sensor technologies as well as the ASIC (application-specific microchip) are developed and produced in-house. As a result, compact pressure sensors and electronics work in perfect partnership and achieve a unique level of long-term stability and reliability even under the most adverse environmental conditions. Trafag is a technological pioneer when it comes to miniaturising robust pressure transmitters.




## Thin-film-on-steel technology

- Very good long term stability
- Resistant to high media temperatures
- Completely welded stainless steel sensor system without O-rings
- Resistant to very high over pressures and ideal for nominal pressures up to 3000 bar



## Thick-film-on-ceramic technology

- Resistant to aggressive media
- Ideal for low pressure ranges and absolute measurement
- Economical

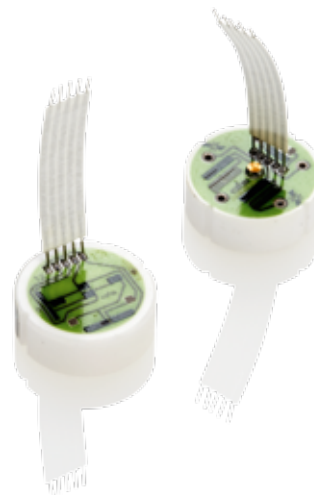




# Accessories






Trafag offers a wide range of original accessories which are ideally matched to our products. These include devices for monitoring or configuring transmitters such as hand pumps with precision pressure gauge or the Sensor Communicator, a handheld device which provides direct access to the calibration values of the transmitter in the Trafag ASIC. Trafag also offers a wide range of accessories meet specific application requirements and also make installation easier. They include diagnostic valve manifolds, snubbers and pressure peak damping elements for measuring pressure, or protective pipes for thermostats.

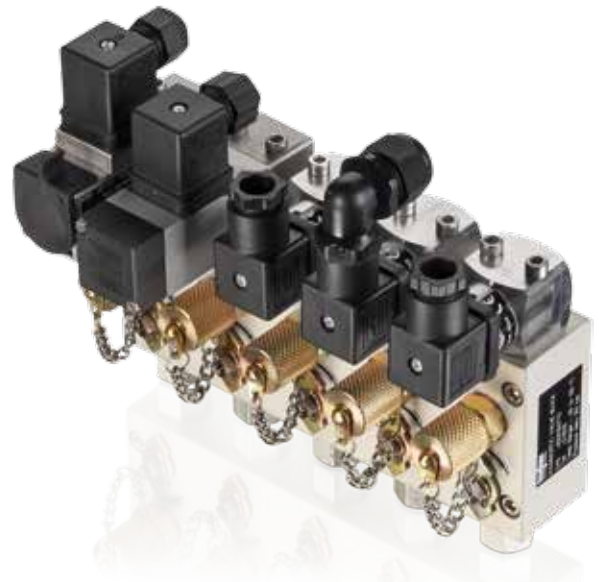








## Accessories for pressure measurement instruments

- SMI Sensor Master Interface
- Sensor Communicator
- CAN2USB CANopen Configuration Tool
- DVB Diagnostic Valve Block
- Hand pump with precision manometer
- Switch amplifier
- Venting box
- Cable hanger
- Pressure peak damping element
- Snubber
- Adapters for different pressure connections
- Stop valve


















# Overview pressure transmitter

|   | NAT<br>8252  | NAH<br>8253  | NAH<br>8254  | NAE<br>8256   | NSL<br>8257  |
|---|--|--|--|---|--|
|   |   |             |   |  |                             |
|   | page 21  | page 31  | page 36  | page 46   | page 52  |
| <b>Measuring principle</b>                | Thin film on steel   | Thin film on steel   | Thin film on steel   | Thin film on steel  | Thin film on steel   |
| <b>Measuring range</b>                    | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi   | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi                                     | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi   | 0 ... 6 to 0 ... 600 bar<br>0 ... 100 to 0 ... 7500 psi                             | 0 ... 0.2 to 0 ... 2.5 bar<br>0 ... 3 to 0 ... 30 psi  |
| <b>Output signal</b>                      | 4 ... 20 mA, 0.5 ... 4.5 VDC,<br>0 ... 5 VDC, 1 ... 5 VDC,<br>1 ... 6 VDC, 0 ... 10 VDC,<br>0.1 ... 10.1 VDC,<br>0.5 ... 4.5 VDC ratiometric,<br>Switching output:<br>1 or 2 PNP transistors                 | 4 ... 20 mA,<br>0 ... 5 VDC,<br>1 ... 6 VDC,<br>0 ... 10 VDC,<br>0.5 ... 4.5 VDC ratiometric | 4 ... 20 mA, 0.5 ... 4.5 VDC,<br>0 ... 5 VDC, 1 ... 5 VDC,<br>1 ... 6 VDC, 0 ... 10 VDC,<br>0.1 ... 10.1 VDC,<br>0.5 ... 4.5 VDC ratiometric,<br>Switching output:<br>1 or 2 PNP transistors                 | 4 ... 20 mA   | 4 ... 20 mA,<br>0 ... 5 VDC,<br>0 ... 10 VDC,<br>0.5 ... 4.5 VDC ratiometric                                   |
| <b>Accuracy @ 25°C typ.</b>               | ± 0.5 % FS typ.  | ± 0.3 % FS typ.<br>± 0.15 % FS typ.<br>± 0.1 % FS typ.                                       | ± 0.3 % FS typ.  | 0.5 %: ± 0.5 % FS typ.<br>0.3 %: ± 0.3 % FS typ.                                    | 0.15 ... 0.8 % FS typ.   |
| <b>Ambient temperature</b>                | -40°C ... +125°C   | -40°C ... +125°C   | -40°C ... +125°C   | -40°C ... +125°C  | -40°C ... +125°C   |
| <b>Media temperature</b>                  | -40°C ... +125°C   | -40°C ... +125°C   | -40°C ... +125°C   | -40°C ... +125°C  | -40°C ... +125°C   |
| <b>Protection</b>                         | IP65, IP67   | Min. IP65  | IP65, IP67   | IP65, IP67  | Min. IP65  |
| <b>Sensor (wetted parts)</b>              | 1.4542 (AISI630)   | 1.4542 (AISI630)   | 1.4542 (AISI630)   | 1.4542 (AISI630)  | 1.4542 (AISI630)   |
| <b>Pressure connection (wetted parts)</b> | 1.4542 (AISI630)   | 1.4542 (AISI630)<br>1.4301 (AISI304)   | 1.4542 (AISI630)   | 1.4542 (AISI630)  | 1.4542 (AISI630)   |
| <b>Housing</b>                            | 1.4301 (AISI304)   | 1.4301 (AISI304)   | 1.4301 (AISI304)   | 1.4301 (AISI304)  | 1.4301 (AISI304)   |
| <b>Pressure connections</b>               | G1/4" m,<br>G1/4" m (Manometer),<br>1/4"NPT m, 1/8"NPT m,<br>7/16"-20UNF SAE J512 f,<br>7/16"-20UNF SAE4 m,<br>7/16"-20UNF m DIN3866,<br>R1/4" m DIN3858,<br>R1/4" m DIN2999, R1/8" m,<br>M10x1 m, M12x1.5 m | G1/4" m, 1/4"NPT m,<br>7/16"-20UNF m,<br>7/16"-20UNF f (valve opener),<br>7/16"-20UNF SAE4 m | G1/4" m,<br>G1/4" m (Manometer),<br>1/4"NPT m, 1/8"NPT m,<br>7/16"-20UNF SAE J512 f,<br>7/16"-20UNF SAE4 m,<br>7/16"-20UNF m DIN3866,<br>R1/4" m DIN3858,<br>R1/4" m DIN2999, R1/8" m,<br>M10x1 m, M12x1.5 m | G1/4" m,<br>G1/4" m (Manometer EN 871),<br>1/4"NPT m,<br>M10x1 m                    | G1/4" m,<br>1/4"NPT m  |
| <b>Electrical connections</b>             | Industrial standard,<br>contact distance 9.4 mm;<br>M12x1; MIL-C 26482;<br>cable IP67  | Industrial standard,<br>contact distance 9.4 mm;<br>M12x1                                    | Industrial standard,<br>contact distance 9.4 mm;<br>M12x1; MIL-C 26482;<br>cable IP67  | Industrial standard,<br>contact distance 9.4 mm;<br>M12x1                           | Industrial standard,<br>contact distance 9.4 mm;<br>M12x1  |
| <b>Applications</b>                       | Machine tools<br>Hydraulics<br>HVAC<br>Refrigeration<br>Process technology<br>Water treatment  | Machine tools<br>Hydraulics<br>Process technology<br>Water treatment<br>Test benches         | Machine tools<br>Hydraulics<br>HVAC<br>Refrigeration<br>Process technology<br>Water treatment  | Shipbuilding<br>Engine manufacturing<br>Hydraulics                                  | Shipbuilding<br>Engine manufacturing<br>Machine tools<br>Process technology<br>Water treatment<br>Test benches |
| <b>Approval / conformity</b>              |  |  |  | ABS, BV, DNV-GL, LRS, KRS,<br>NKK, RINA, RMRS                                       | DNV-GL, RINA   |
| <b>Data sheet</b>                         | <a href="http://www.trafag.com/H72303">www.trafag.com/H72303</a>   | <a href="http://www.trafag.com/H72300">www.trafag.com/H72300</a>                             | <a href="http://www.trafag.com/H72304">www.trafag.com/H72304</a>   | <a href="http://www.trafag.com/H72305">www.trafag.com/H72305</a>                    | <a href="http://www.trafag.com/H72302">www.trafag.com/H72302</a>   |
| <b>Instructions</b>                       | <a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a>   | <a href="http://www.trafag.com/H73250">www.trafag.com/H73250</a>                             | <a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a>   | <a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a>                    | <a href="http://www.trafag.com/H73250">www.trafag.com/H73250</a>   |






| NAR<br>8258   |  ECT<br>8472   | ECT 0.3 % (0.5 %, 1.0 %)<br>8473   | ECTN<br>8477   |  ECR<br>8478 |  EPI<br>8287  |
|---|---|--|--|---|--|
| page 57   | page 66   | page 73  | page 80  | page 86   | page 92  |
|    |    |   |                                     |            |   |
| Thin film on steel  | Thick film on ceramic   | Thick film on ceramic  | Thick film on ceramic  | Thick film on ceramic   | Thin film on steel   |
| 0 ... 6 to 0 ... 600 bar<br>0 ... 100 to 0 ... 7500 psi   | 0 ... 1 to 0 ... 400 bar<br>0 ... 15 to 0 ... 5000 psi  | 0 ... 0.1 to 0 ... 40 bar<br>0 ... 1.5 to 0 ... 500 psi  | 0 ... 1 to 0 ... 400 bar<br>0 ... 15 to 0 ... 5000 psi   | 0 ... 0.1 to 0 ... 60 bar<br>0 ... 1.5 to 0 ... 1000 psi                                      | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi   |
| 4 ... 20 mA,<br>Switching output:<br>1 or 2 PNP transistors   | 4 ... 20 mA,<br>0 ... 5 VDC,<br>1 ... 6 VDC,<br>0 ... 10 VDC,<br>0.5 ... 4.5 VDC ratiom.  | 4 ... 20 mA,<br>0 ... 5 VDC,<br>1 ... 6 VDC,<br>0 ... 10 VDC,<br>0.5 ... 4.5 VDC ratiom.   | 4 ... 20 mA  | 4 ... 20 mA   | 4 ... 20 mA,<br>0 ... 5 VDC,<br>1 ... 6 VDC,<br>0 ... 10 VDC,<br>0.5 ... 4.5 VDC ratiometric   |
| ± 0.3 % FS typ.   | ± 0.5 % FS typ.   | ± 0.3 % FS typ.<br>(± 0.5 % FS typ.,<br>± 1 % FS typ.)   | ± 0.5 % FS typ.  | ± 0.3 % FS typ.<br>(± 0.5 % FS typ.,<br>± 1 % FS typ.)  | ± 0.5 % FS typ.<br>± 0.3 % FS typ.   |
| -40°C ... +125°C  | -25°C ... +85°C   | -25°C ... +85°C  | -25°C ... +85°C  | -25°C ... +125°C  | -40°C ... +125°C   |
| -40°C ... +125°C  | -25°C ... +125°C  | -25°C ... +125°C   | -25°C ... +85°C  | -25°C ... +125°C  | -40°C ... +125°C   |
| IP65, IP67  | IP65, IP67, IP68  | IP65, IP67, IP68   | min. IP65  | IP65, IP67  | IP65, IP67, IP68   |
| 1.4542 (AISI630)  | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)  | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)   | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)   | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)  | 1.4542 (AISI630)   |
| 1.4542 (AISI630)  | 1.4305 (AISI303)<br>1.4404/1.4435 (AISI316L)<br>1.4462 (AISI318LN)<br>Titanium Grade 5  | 1.4305 (AISI303)<br>1.4404/1.4435 (AISI316L)<br>1.4462 (AISI318LN)<br>Titanium Grade 5   | 1.4404/1.4435 (AISI316L)<br>1.4462 (AISI318LN)<br>Titanium Grade 5   | 1.4404 (AISI316L)   | 1.4542 (AISI630) or<br>1.4404 (AISI316L)   |
| 1.4301 (AISI304)  | 1.4305 (AISI303)<br>1.4404/1.4435 (AISI316L)<br>1.4462 (AISI318LN)<br>Titanium Grade 5  | 1.4305 (AISI303)<br>1.4404/1.4435 (AISI316L)<br>1.4462 (AISI318LN)<br>Titanium Grade 5   | 1.4404/1.4435 (AISI316L)<br>1.4462 (AISI318LN)<br>Titanium Grade 5   | 1.4404/1.4435 (AISI316L)  | 1.4542 (AISI630) or<br>1.4404 (AISI316L)   |
| G1/4" m,<br>G1/4" m (Manometer),<br>1/4"NPT m, 1/8"NPT m,<br>7/16"-20UNF SAE J512 f,<br>7/16"-20UNF SAE4 m,<br>7/16"-20UNF m, R1/4" m,<br>R1/8" m, M10x1 m,<br>M12x1.5 m (DIN EN ISO<br>9974-2) | G1/4" f, G1/4" m,<br>G1/2" m DIN3852-A,<br>G1/2" m DIN3852-E,<br>1/4"NPT m ANSI B1.20.1,<br>1/8"NPT m ANSI B1.20.1,<br>7/16"-20UNF m SAE4,<br>7/16"-20UNF m, DIN3866,<br>7/16"-20UNF f SAE J512 with<br>valve opener, R1/4" m DIN3858<br>G3/4" frontal membrane | G1/4" f, G1/4" m,<br>G1/2" m DIN3852-A,<br>G1/2" m DIN3852-E,<br>1/4"NPT m ANSI B1.20.1,<br>1/8"NPT m ANSI B1.20.1,<br>7/16"-20UNF m SAE4,<br>R1/4" m DIN3858,<br>G3/4" frontal membrane | G1/4" f,<br>G1/4" m,<br>G1/2" m,<br>1/4"NPT m  | G1/4" m,<br>G3/4" frontal membrane  | G1/4" f; G1/4" m Seal; G1/2"<br>m (Manometer); 1/4"NPT m;<br>1/2"NPT m; R1/4" m<br>DIN3858;<br>M14x1.5 m DIN6149-2;<br>7/16"-20UNF m, DIN3866;<br>7/16"-20UNF m SAE4 (J1926);<br>7/16"-20UNF f SAE J512,<br>valve opener |
| Industrial standard, contact<br>distance 9.4 mm;<br>M12x1   | EN175301-803-A<br>(DIN43650-A); M12x1;<br>Industrial standard,<br>contact distance 9.4 mm;<br>Packard Metri Pack; Cable   | EN175301-803-A<br>(DIN43650-A); M12x1;<br>Industrial standard,<br>contact distance 9.4 mm;<br>Packard Metri Pack; Cable  | EN175301-803-A<br>(DIN43650-A); M12x1;<br>Industrial standard,<br>contact distance 9.4 mm;<br>Cable IP67; Cable IP68 | EN175301-803-A<br>(DIN43650-A);<br>M12x1  | Industrial standard,<br>contact distance 9.4 mm;<br>M12x1; Packard Metri Pack;<br>cable IP68   |
| Railways  | Machine tools<br>Hydraulics<br>Water treatment  | Machine tools<br>Hydraulics<br>Water treatment   | Shipbuilding<br>Engine manufacturing   | Railways  | Machine tools<br>Hydraulics<br>Industrial applications   |
| EN 50155 (Railway)<br>EN 45545-2 (Fire protection)<br>EN 61373 (Shock, vibration)<br>EN 50121-3-2 (EMC)   |   |  | DNV-GL, KRS, RINA  | EN 50155 (Railway)<br>EN 45545-2 (Fire protection)  |  |
| <a href="http://www.trafag.com/H72307">www.trafag.com/H72307</a>  | <a href="http://www.trafag.com/H72324">www.trafag.com/H72324</a>  | <a href="http://www.trafag.com/H72326">www.trafag.com/H72326</a>   | <a href="http://www.trafag.com/H72322">www.trafag.com/H72322</a>   | <a href="http://www.trafag.com/H72337">www.trafag.com/H72337</a>                              | <a href="http://www.trafag.com/H72317">www.trafag.com/H72317</a>   |
| <a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a>  | <a href="http://www.trafag.com/H73324">www.trafag.com/H73324</a>  | <a href="http://www.trafag.com/H73324">www.trafag.com/H73324</a>   | <a href="http://www.trafag.com/H73324">www.trafag.com/H73324</a>   | <a href="http://www.trafag.com/H73324">www.trafag.com/H73324</a>                              | <a href="http://www.trafag.com/H73317">www.trafag.com/H73317</a>   |

# Overview pressure transmitter









|   | EPN<br>8288    | EPN/EPNCR<br>8298  | EPR<br>8293  | NPN<br>8264  | FPT<br>8235   |  |
|---|---|---|---|---|---|--|
|   | page 100  | page 105  | page 111  | page 116  | page 122  |  |
|   |    |                    |              |              |                                      |  |
| <b>Measuring principle</b>                | Thin film on steel  | Thin film on steel  | Thin film on steel  | Thin film on steel  | Thin film on steel  |  |
| <b>Measuring range</b>                    | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi  | 0 ... 2.5 to 0 ... 2500 bar   | 0 ... 2.5 to 0 ... 600 bar  | 0 ... 2.5 to 0 ... 250 bar  | 0 ... 0.3 to 0 ... 100 bar<br>0 ... 15 to 0 ... 1500 psi  |  |
| <b>Output signal</b>                      | 4 ... 20 mA, 0 ... 10 VDC<br>0.5 ... 4.5 VDC ratiometric<br> | 4 ... 20 mA<br>0.5 ... 4.5 VDC ratiometric  | 4 ... 20 mA   | 4 ... 20 mA   | 4 ... 20 mA, 0 ... 5 VDC,<br>1 ... 6 VDC, 0 ... 10 VDC,<br>0.5 ... 4.5 VDC ratiom.                                      |  |
| <b>Accuracy @ 25°C typ.</b>               | ± 0.5 % FS typ.<br>± 0.3 % FS typ.  | ± 0.5 % FS typ.<br>± 0.3 % FS typ.  | ± 0.5 % FS typ.<br>± 0.3 % FS typ.  | ± 0.5 % FS typ.<br>± 0.3 % FS typ.  | ± 0.4 % FS  |  |
| <b>Ambient temperature</b>                | -40°C ... +125°C  | -40°C ... +125°C  | -40°C ... +125°C  | -40°C ... +100°C  | -40°C ... +85°C<br>(Cable PVC 22: -5°C ... +60°C)   |  |
| <b>Media temperature</b>                  | -40°C ... +125°C  | -40°C ... +125°C  | -40°C ... +125°C  | -40°C ... +100°C  | -40°C ... +125°C  |  |
| <b>Protection</b>                         | IP65  | IP65, IP67, IP69K   | IP65, IP67  | IP65, IP69K   | IP65, IP67, IP68  |  |
| <b>Sensor (wetted parts)</b>              | 1.4542 (AISI630)  | 1.4542 (AISI630)  | 1.4542 (AISI630)  | 1.4542 (AISI630)  | 1.4542 (AISI630)  |  |
| <b>Pressure connection (wetted parts)</b> | 1.4542 (AISI630) or<br>1.4404 (AISI316L)  | 1.4542 (AISI630)  | 1.4542 (AISI630)<br>1.4301 (AISI304)  | 1.4542 (AISI630)  | 1.4542 (AISI630)  |  |
| <b>Housing</b>                            | 1.4542 (AISI630) or<br>1.4404 (AISI316L)  | 1.4301 (AISI304)<br>1.4542 (AISI630)  | 1.4301 (AISI304)<br>1.4542 (AISI630)  | 1.4301 (AISI304)  | 1.4301 (AISI304)  |  |
| <b>Pressure connections</b>               | G1/4" m, R1/4" m,<br>G1/2" m (Manom.),<br>1/4" NPT a, 1/2" NPT a,<br>M14x1.5 a  | G1/4" m, R1/4" m,<br>G1/2" m (Manom.),<br>1/4"NPT m, 1/2"NPT m,<br>M14x1.5 m, M18x1.5 m             | G1/4" m,<br>R1/4" m,<br>1/4"NPT m,<br>1/2"NPT m   | G1/4" f,<br>M10x1 f,<br>G1/8" f   | G1/2" m, flush membrane   |  |
| <b>Electrical connections</b>             | Industrial standard<br>EN175301-803A  | EN175301-803-A<br>(DIN43650-A); DIN72585;<br>Cable  | EN175301-803-A<br>(DIN43650-A)  | EN175301-803-A<br>(DIN43650-A); Cable   | EN175301-803-A<br>(DIN43650-A); M12x1;<br>Industrial standard,<br>contact distance 9.4 mm;<br>Packard Metri Pack; Cable |  |
| <b>Applications</b>                       | Shipbuilding<br>Engine manufacturing<br>Machine tools<br>Hydraulics   | Shipbuilding<br>Engine manufacturing<br>Machine tools   | Railways  | Shipbuilding<br>Engine manufacturing<br>Railways  | Engine manufacturing<br>Machine tools<br>Hydraulics   |  |
| <b>Approval / conformity</b>              |   | ABS, BV, CCS, DNV-GL, KRS,<br>LRS, NKK, RINA, RMRS  | EN 50155 (Railways)   | ABS, BV, CCS, DNV-GL, KRS,<br>LRS, NKK, RINA, RMRS  |   |  |
| <b>Data sheet</b>                         | <a href="http://www.trafag.com/H72318">www.trafag.com/H72318</a>  | <a href="http://www.trafag.com/H72312">www.trafag.com/H72312</a>                                    | <a href="http://www.trafag.com/H72311">www.trafag.com/H72311</a>                              | <a href="http://www.trafag.com/H72313">www.trafag.com/H72313</a>                                | <a href="http://www.trafag.com/H72316">www.trafag.com/H72316</a>  |  |
| <b>Instructions</b>                       | <a href="http://www.trafag.com/H73317">www.trafag.com/H73317</a>  | <a href="http://www.trafag.com/H73311">www.trafag.com/H73311</a>                                    | <a href="http://www.trafag.com/H73311">www.trafag.com/H73311</a>                              | <a href="http://www.trafag.com/H73313">www.trafag.com/H73313</a>                                | <a href="http://www.trafag.com/H73316">www.trafag.com/H73316</a>  |  |

| CMP<br>8270   | N<br>8202   | ND<br>8204  | EXNT<br>8292   | EXNA<br>8854  |
|---|---|---|--|---|
| page 127  | page 132  | page 136  | page 140   | page 146  |
|  |  |  |                           |                          |
| Thin film on steel  | Thin film on steel  | Thin film on steel  | Thin film on steel   | Piezoresistive  |
| 0 ... 0.2 to 0 ... 600 bar  | 0 ... 1.0 to 0 ... 600 bar  | 0 ... 1 to 0 ... 16 bar   | 0 ... 0.4 to 0 ... 2000 bar<br>0 ... 5 to 0 ... 30000 psi  | 0 ... 0.1 to 0 ... 1000 bar   |
| Bus protocol CANopen<br>DS404   | 4 ... 20 mA   | 4 ... 20 mA (P1-P2)   | 4 ... 20 mA  | 4 ... 20 mA   |
| ± 0.5 % FS typ.<br>± 0.15 % FS typ.<br>± 0.1 % FS typ.                            | ± 0.5 % FS typ.   | ± 0.8 % FS typ  | ± 0.5 % FS typ.<br>± 0.3 % FS typ.   |   |
| -40°C ... +125°C  | -25°C ... +85°C   | -25°C ... +85°C   | Max. -40°C ... +120°C  | T3: -40°C ... +125°C<br>T4: -40°C ... +85°C<br>T6: -40°C ... +50°C  |
| -50°C ... +135°C  | -25°C ... +125°C  | -25°C ... +125°C  | Max. -40°C ... +120°C  | T3: -40°C ... +150°C<br>T4: -40°C ... +100°C<br>T6: -40°C ... +50°C   |
| Min. IP67   | Min. IP65   | Min. IP65   | IP65, IP67   | Min. IP65   |
| 1.4542 (AISI630)  | 1.4542 (AISI630)  | 1.4542 (AISI630)  | 1.4542 (AISI630), optional<br>hydrogen-compatible steel  | 1.4435 (AISI316L) or titanium   |
| 1.4542 (AISI630)<br>1.4301 (AISI304)  | 1.4542 (AISI630)  | 1.4542 (AISI630)  | 1.4542 (AISI630)<br>1.4301 (AISI304)<br>Optional hydrogen-com-<br>patible steel                            | 1.4435 (AISI316L) or titanium   |
| 1.4301 (AISI304)  | AlSi10Mg/ Epoxy coated  | AlSi10Mg/ Epoxy coated  | 1.4301 (AISI304)   | 1.4435 (AISI316L) or titanium   |
| G1/4" m,<br>1/4"NPT m, 7/16"-20UNF m,<br>7/16"-20UNF f (valve<br>opener)          | G1/4" f, G1/2" m  | G1/4" f   | G1/4" m, G1/4" m (Manom.),<br>G1/4" f, G1/2" m,<br>G1/2" m (Manom.), R1/4" m,<br>1/4"NPT m, M18x1.5 m      | 1/4" NPT m, 1/2"NPT m, G1/4" f,<br>G1/4" m, G1/2" m,<br>G1/2" m frontal membrane,<br>G1/2" m flush membrane |
| M12x1   | Terminal screw<br>0.75 ... 2.5 mm <sup>2</sup>                                    | Terminal screw<br>0.75 ... 2.5 mm <sup>2</sup>                                    | EN175301-803-A;<br>M12x1; MIL-C 26482;<br>Binder 723; Cable  | EN175301-803-A; M12x1;<br>MIL-C 26482; Binder 723;<br>Cable   |
| Engine manufacturing<br>Railways<br>Machine tools                                 | Shipbuilding<br>Engine manufacturing  | Shipbuilding<br>Engine manufacturing  | Shipbuilding<br>Ex Zones 0, 1, 2 (gas);<br>20, 21, 22 (dust) and mining                                    | Ex Zone 0, 1, 2 / Gas<br>Ex Zone 20, 21, 22 / Dust  |
|   | ABS, BV, CCS, DNV-GL, KRS,<br>LRS, RINA   | BV, DNV, RINA   | GL, KRS<br>ATEX / IECEx, according to the<br>norm EN/IEC 60079-0/<br>EN 60079-11/<br>EN 60079-26/ EN 50303 | DNV-GL<br>Ex according to standards,<br>IEC/EN 60079-0/-11/-26,<br>EN 50303                                 |
| <a href="http://www.trafag.com/H72614">www.trafag.com/H72614</a>                  | <a href="http://www.trafag.com/H72206">www.trafag.com/H72206</a>                  | <a href="http://www.trafag.com/H72218">www.trafag.com/H72218</a>                  | <a href="http://www.trafag.com/H72329">www.trafag.com/H72329</a>   | <a href="http://www.trafag.com/H72334">www.trafag.com/H72334</a>  |
| <a href="http://www.trafag.com/H73614">www.trafag.com/H73614</a>                  | <a href="http://www.trafag.com/H70722">www.trafag.com/H70722</a>                  | <a href="http://www.trafag.com/H73218">www.trafag.com/H73218</a>                  | <a href="http://www.trafag.com/H73329">www.trafag.com/H73329</a>   |   |

# Overview submersible pressure transmitters

|   | EXL<br>8432   | EXNAL<br>8858   | ECL<br>8438   | ECL<br>8439  | NAL<br>8838   |
|---|---|---|---|--|---|
|   |  |  |  |                                       |  |
|   | page 151  | page 156  | page 160  | page 164   | page 170  |
| <b>Measuring principle</b>                | Thick film on ceramic   | Piezoresistive  | Thick film on ceramic   | Thick film on ceramic  | Piezoresistive  |
| <b>Measuring range</b>                    | 0 ... 0.2 to 0 ... 10 bar   | 0 ... 0.1 to 0 ... 25 bar   | 0 ... 0.1 to 0 ... 10 bar   | 0 ... 0.1 to 0 ... 2.0 bar<br>0 ... 1.5 to 0 ... 30 psi  | 0 ... 0.1 to 0 ... 25 bar   |
| <b>Output signal</b>                      | 4 ... 20 mA   | 4 ... 20 mA   | 4 ... 20 mA   | 4 ... 20 mA  | 4 ... 20 mA<br>0 ... 10 VDC   |
| <b>Accuracy @ 25°C typ.</b>               | ± 0.3 % FS typ.<br>± 0.5 % FS typ.  |   | ± 0.3 % FS typ.<br>± 0.5 % FS typ.  | ± 0.3 % FS typ.<br>± 0.5 % FS typ.   |   |
| <b>Ambient temperature</b>                | T4: -20°C ... +70°C<br>T6: -20°C ... +65°C  | T4/T6: -5°C ... +50°C   | -25°C ... +80°C (+70°C)   | max. -25°C ... +70°C   | -5°C ... +50°C  |
| <b>Media temperature</b>                  | T4: -20°C ... +70°C<br>T6: -20°C ... +65°C  | T4/T6: -5°C ... +50°C   | -25°C ... +80°C (+70°C)   | max. -25°C ... +70°C   | -5°C ... +50°C  |
| <b>Protection</b>                         | IP68 (25 bar; 250m)   | Min. IP68   | IP68 (25 bar; 250m)   | IP68 (2.0 bar/20 m)  | Min. IP68   |
| <b>Sensor (wetted parts)</b>              | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)                                    | 1.4435 (AISI316L)   | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)                                    | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96%)  | 1.4435 (AISI316L)   |
| <b>Pressure connection (wetted parts)</b> | 1.4404/1.4435 (AISI316L)  | 1.4435 (AISI316L) or titanium   | 1.4404/1.4435 (AISI316L)  | 1.4404 (AISI316L) or<br>1.4462 (AISI318LN)   | 1.4435 (AISI316L) or titanium   |
| <b>Housing</b>                            | 1.4404/1.4435 (AISI316L)  | 1.4435 (AISI316L) or titanium   | 1.4404/1.4435 (AISI316L)  | 1.4404 (AISI316L) or<br>1.4462 (AISI318LN)   | 1.4435 (AISI316L) or titanium   |
| <b>Pressure connections</b>               | Type 1 f, M 10x1,<br>Type 2 m, M 22x1   | Open; Closed;<br>G1/4" m  | Type 1 f, M 10x1,<br>Type 2 m, M 22x1   |  | Open, Closed,<br>G1/4" m  |
| <b>Electrical connections</b>             | Cable PUR/FEP/PE  | Cable PUR/Teflon/PE   | Cable PUR/FEP/PE  | Cable PUR/Radox/PE   | Cable PUR/Teflon/PE   |
| <b>Applications</b>                       | Ex Zone 0, 1, 2 / Gas<br>Ex Underground Mining                                    | Shipbuilding<br>Ex SEV 11 ATEX 0145 X   | Shipbuilding<br>Process technology<br>Water treatment                             | Process technology<br>Water treatment (wastewater,<br>grey-water, drinking water)<br>Seawater<br>Level of oils and fuels | Shipbuilding<br>Process technology<br>Water treatment                               |
| <b>Approval / conformity</b>              | GL, KRS<br>Ex ATEX/IECEX, EN 60079-0/<br>EN 60079-11/EN 60079-26/<br>EN 50303     | GL, KRS   | GL, KRS   |  | GL, KRS   |
| <b>Data sheet</b>                         | <a href="http://www.trafag.com/H72330">www.trafag.com/H72330</a>                  | <a href="http://www.trafag.com/H72231">www.trafag.com/H72231</a>                  | <a href="http://www.trafag.com/H72328">www.trafag.com/H72328</a>                  | <a href="http://www.trafag.com/H72336">www.trafag.com/H72336</a>   | <a href="http://www.trafag.com/H72228">www.trafag.com/H72228</a>                    |
| <b>Instructions</b>                       | <a href="http://www.trafag.com/H73329">www.trafag.com/H73329</a>                  |   | <a href="http://www.trafag.com/H73328">www.trafag.com/H73328</a>                  | <a href="http://www.trafag.com/H73336">www.trafag.com/H73336</a>   |   |

# Overview electronic pressure switches

| EPN-S<br>8320   |  DPC<br>8380  | DPS<br>8381  | DCS<br>8864  |  NAT / NAH<br>8252 / 8254  | NAR<br>8258   |  |
|---|--|--|--|--|---|---|
| page 175  | page 180   | page 187   | page 194   | page 21 / 36   | page 57   |   |
|        |   |   |             |   |    |   |
| Thin film on steel  | Thick film on ceramic  | Thin film on steel   | Thin film on steel   | Thin film on steel   | Thin film on steel  |   |
| 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi                                | 0 ... 0.2 to 0 ... 100 bar<br>0 ... 2.5 to 0 ... 1500 psi<br>adjustable 50 ... 100 % FS  | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi<br>adjustable 50 ... 100 % FS   | 0 ... 1 to 0 ... 600 bar   | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi   | 0 ... 6 to 0 ... 600 bar<br>0 ... 100 to 0 ... 7500 psi   |   |
| Transistor (open source)  | 4 ... 20 mA,<br>0 ... 5 VDC,<br>1 ... 6 VDC,<br>0 ... 10 VDC, switchable<br>mA or V  | 4 ... 20 mA,<br>0 ... 5 VDC,<br>1 ... 6 VDC,<br>0 ... 10 VDC, switchable<br>mA or V  | 4 ... 20 mA,<br>0 ... 10 VDC<br>2 Relays, electrically isolated<br>30W (max. 1A), 36 VAC/ DC | 4 ... 20 mA, 0.5 ... 4.5 VDC,<br>0 ... 5 VDC, 1 ... 5 VDC,<br>1 ... 6 VDC, 0 ... 10 VDC,<br>0.1 ... 10.1 VDC,<br>0.5 ... 4.5 VDC ratiometric,<br>Switching output:<br>1 or 2 PNP transistors                 | 4 ... 20 mA,<br>Switching output:<br>1 or 2 PNP transistors   |   |
| ± 0.5 % FS typ.<br>(Switchpoint)  | ± 0.5 % FS typ.  | ± 0.5 % FS typ.  | ± 0.5 % FS typ.  | NAT: ± 0.5 % FS typ.<br>NAH: ± 0.3 % FS typ.   | ± 0.3 % FS typ.   |   |
| Standard: -25°C ... +85°C<br>Option: -40°C ... +125°C                                   | -25°C ... +85°C  | -25°C ... +85°C  | -25°C ... +80°C<br>(LCD display active<br>-10°C ... +70°C)                                   | -40°C ... +125°C   | -40°C ... +125°C  |   |
| -40°C ... +125°C  | -25°C ... +85°C  | -25°C ... +85°C  | -25°C ... +125°C   | -40°C ... +125°C   | -40°C ... +125°C  |   |
| IP65 (IP67), IP69K  | IP67   | IP67   | IP65   | IP65, IP67   | IP65, IP67  |   |
| 1.4542 (AISI630)  | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)   | 1.4542 (AISI630)   | 1.4542 (AISI630)   | 1.4542 (AISI630)   | 1.4542 (AISI630)  |   |
| 1.4542 (AISI630)<br>1.4301 (AISI304)  | 1.4305 (AISI303)<br>1.4404/1.4435 (AISI316L)<br>1.4462 (AISI318LN)<br>Titanium Grade 5   | 1.4542 (AISI630)   | 1.4542 (AISI630)<br>1.4404 (AISI316L)  | 1.4542 (AISI630)   | 1.4542 (AISI630)  |   |
| 1.4301 (AISI304)  | Zinc based die-casting alloy,<br>nickel plated<br>display housing plastic  | Zinc based die-casting alloy,<br>nickel plated<br>display housing plastic  | 1.4301 (AISI304)   | 1.4301 (AISI304)   | 1.4301 (AISI304)  |   |
| G1/4" m,<br>1/4"NPT m,<br>G1/2" m,<br>M14x1.5 m,<br>1/2"NPT m                           | G1/4" f, G1/4" m,<br>G1/2" m DIN3852-E,<br>1/4"NPT m,<br>R1/4" m DIN3858,<br>7/16"-20UNF m DIN3866,<br>7/16"-20UNF f SAE J512<br>valve opener,<br>7/16"-20UNF f (SAE 4),<br>G3/4" frontal membrane | G1/4" f; G1/4" m Seal;<br>G1/2" m (Manometer);<br>1/4"NPT m; 1/2"NPT m;<br>R1/4" m DIN3858;<br>M14x1.5 m DIN6149-2;<br>7/16"-20UNF m, DIN3866;<br>7/16"-20UNF m SAE4 (J1926);<br>7/16"-20UNF f SAE J512,<br>valve opener | G1/4" m,<br>G1/4" f,<br>G1/2" m,<br>Flange   | G1/4" m,<br>G1/4" m (Manometer),<br>1/4"NPT m, 1/8"NPT m,<br>7/16"-20UNF SAE J512 f,<br>7/16"-20UNF SAE4 m,<br>7/16"-20UNF m DIN3866,<br>R1/4" m DIN3858,<br>R1/4" m DIN2999, R1/8" m,<br>M10x1 m, M12x1.5 m | G1/4" m,<br>G1/4" m (Manometer),<br>1/4"NPT m, 1/8"NPT m,<br>7/16"-20UNF SAE J512 f,<br>7/16"-20UNF SAE4 m,<br>7/16"-20UNF m, R1/4" m,<br>R1/8" m, M10x1 m,<br>M12x1.5 m<br>(DIN EN ISO 9974-2) |   |
| EN175301-803-A<br>(DIN43650-A); Cable   | Male electrical plug M12x1,<br>5-pole; Male electrical plug<br>M12x1, 4-pole   | Male electrical plug M12x1,<br>5-pole; Male electrical plug<br>M12x1, 4-pole   | M12x1, 8-pole  | Industrial standard,<br>contact distance 9.4 mm;<br>M12x1; MIL-C 26482;<br>cable IP67  | Industrial standard,<br>contact distance 9.4 mm;<br>M12x1   |   |
| Shipbuilding<br>Engine manufacturing<br>Railways<br>Machine tools<br>Hydraulics<br>HVAC | Machine tools<br>HVAC<br>Refrigeration<br>Water treatment<br>Process technology  | Machine tools<br>Hydraulics<br>Process technology<br>Industrial applications   | Shipbuilding<br>Machine tools<br>Hydraulics<br>Process technology                            | Machine tools<br>Hydraulics<br>HVAC<br>Refrigeration<br>Process technology<br>Water treatment  | Railways  |   |
| DNV-GL  |  |  | DNV-GL   |  | EN 50155 (Railway)<br>EN 45545-2 (Fire protection)<br>EN 61373 (Shock, vibration)<br>EN 50121-3-2 (EMC)   |   |
| <a href="http://www.trafag.com/H72333">www.trafag.com/H72333</a>                        | <a href="http://www.trafag.com/H72320">www.trafag.com/H72320</a>   | <a href="http://www.trafag.com/H72321">www.trafag.com/H72321</a>   | <a href="http://www.trafag.com/H72605">www.trafag.com/H72605</a>                             | NAT: <a href="http://www.trafag.com/H72303">www.trafag.com/H72303</a><br>NAH: <a href="http://www.trafag.com/H72304">www.trafag.com/H72304</a>   | <a href="http://www.trafag.com/H72307">www.trafag.com/H72307</a>  |   |
| <a href="http://www.trafag.com/H73333">www.trafag.com/H73333</a>                        | <a href="http://www.trafag.com/H73320">www.trafag.com/H73320</a>   | <a href="http://www.trafag.com/H73320">www.trafag.com/H73320</a>   | <a href="http://www.trafag.com/H73605">www.trafag.com/H73605</a>                             | <a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a>   | <a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a>  |   |

# Pressure sensors

Pressure sensors provide the basis for the outstanding reliability and durability of Trafag pressure transmitters. Developed and produced by Trafag, these pressure sensors are also available to third parties for special OEM solutions. Trafag pressure sensors lend themselves extremely well to adaptation, providing the basis for seamless integration into OEM applications. Trafag's specialists work together with customers to develop tailor-made solutions. Success is assured by combining professional project management – from drafting the requirements specification right through to start of production – with a team of experienced application engineers.



## OEM Pressure sensor 8810



### Features

- Thin-film-on-steel sensor technology
- Excellent long-term stability
- Further versions available

### Technical Data

|                               |                  |
|-------------------------------|------------------|
| Sensor material               | 1.4542/630       |
| Output signal (10 VDC supply) | 1.2 ... 2.8 mV/V |
| Media temperature             | -25°C ... +125°C |
| Ambient temperature           | -25°C ... +100°C |

### Product description

| Range [bar] | Max. working pressure [bar] | U-supply [VDC] | Accuracy NLH (BSL) [± % d.S. typ.] | Range [bar] | Max. working pressure [bar] | U-supply [VDC] | Accuracy NLH (BSL) [± % d.S. typ.] |
|-------------|-----------------------------|----------------|------------------------------------|-------------|-----------------------------|----------------|------------------------------------|
| 0 ... 40    | 80                          | 10 ... 15      | 0.07                               | 0 ... 400   | 800                         | 10 ... 15      | 0.07                               |
| 0 ... 100   | 200                         | 10 ... 15      | 0.07                               | 0 ... 600   | 1000                        | 10 ... 15      | 0.07                               |
| 0 ... 250   | 500                         | 10 ... 15      | 0.07                               |             |                             |                |                                    |



Data sheet

[www.trafag.com/H72205](http://www.trafag.com/H72205)



# OEM Pressure sensor 8421



## Features

- Thick film on ceramic sensor technology
- Excellent long-term stability

## Technical Data

|                               |  |
|-------------------------------|--|
| Sensor material               | Al <sub>2</sub> O <sub>3</sub> , 316L (1.4435, 1.4404) |
| Output signal (10 VDC supply) | 2.3 ... 3.5 mV/V                                       |
| Media temperature             | -25°C ... +125°C                                       |
| Ambient temperature           | -25°C ... +100°C                                       |

## Product description

| Range [bar] | Max. working pressure [bar] | U-supply [VDC] | Accuracy NLH (BSL) [± % d.S. typ.] | Range [bar] | Max. working pressure [bar] | U-supply [VDC] | Accuracy NLH (BSL) [± % d.S. typ.] |
|-------------|-----------------------------|----------------|------------------------------------|-------------|-----------------------------|----------------|------------------------------------|
| 0 ... 1.6   | 3.2                         | 20             | 0.25                               | 0 ... 25    | 50                          | 20             | 0.25                               |
| 0 ... 4     | 10                          | 20             | 0.25                               | 0 ... 40    | 80                          | 20             | 0.25                               |
| 0 ... 6     | 12                          | 20             | 0.25                               | 0 ... 60    | 120                         | 20             | 0.25                               |
| 0 ... 10    | 20                          | 20             | 0.25                               | 0 ... 100   | 200                         | 20             | 0.25                               |
| 0 ... 16    | 32                          | 20             | 0.25                               |             |                             |                |                                    |



Data sheet

[www.trafag.com/H72233](http://www.trafag.com/H72233)

# Transducer 8822



## Features

- Thin-film-on-steel sensor technology
- Smallest design
- Excellent long-term stability

## Technical Data

|                             |                  |
|-----------------------------|------------------|
| Sensor material             | 1.4542/630       |
| Output signal (ratiometric) | 1.7 ... 2 mV/V   |
| Media temperature           | -25°C ... +125°C |
| Ambient temperature         | -25°C ... +125°C |

## Product description

| Range [bar] | Max. working pressure [bar] | U-supply [VDC] | Accuracy NLH (BSL) [± % FS typ.] | Range [bar] | Max. working pressure [bar] | U-supply [VDC] | Accuracy NLH (BSL) [± % FS typ.] |
|-------------|-----------------------------|----------------|----------------------------------|-------------|-----------------------------|----------------|----------------------------------|
| 0 ... 6     | 12                          | 10 ... 15      | 0.5                              | 0 ... 100   | 200                         | 10 ... 15      | 0.5                              |
| 0 ... 10    | 20                          | 10 ... 15      | 0.5                              | 0 ... 160   | 320                         | 10 ... 15      | 0.5                              |
| 0 ... 16    | 32                          | 10 ... 15      | 0.5                              | 0 ... 250   | 500                         | 10 ... 15      | 0.5                              |
| 0 ... 25    | 50                          | 10 ... 15      | 0.5                              | 0 ... 400   | 800                         | 10 ... 15      | 0.5                              |
| 0 ... 40    | 80                          | 10 ... 15      | 0.5                              | 0 ... 600   | 1000                        | 10 ... 15      | 0.5                              |
| 0 ... 60    | 120                         | 10 ... 15      | 0.5                              |             |                             |                |                                  |



Data sheet

[www.trafag.com/H72315](http://www.trafag.com/H72315)

# Customer specific design for OEMs

If the requirements of an application cannot be met with an existing product, Trafag is able to efficiently adapt its standard products to the specific needs of customers and to develop special OEM solutions. Thanks to their modular design, Trafag products can be efficiently customized to fit seamlessly into the targeted environment, providing the high performance and reliability of all Trafag products which are based on the proprietary sensor technologies.

A team of experienced and highly skilled engineers in development and production guarantees excellent products. An efficient project management minimizes risks and ensures a short time to market.

## Tank pressure transmitter with temperature sensor



### Features

- For fuel density measurement
- Based on established thick-film-on ceramic technology

### Technical Data

|                       |                   |
|-----------------------|-------------------|
| Pressure range        | -100 ... 900 mbar |
| Output signal         | Digital signal    |
| Electrical connection | PCB connector     |
| Media temperature     | -25°C ... +85°C   |

To determine the fuel density in petrol tanks, the pressure signal from a ceramics sensor element and the signal from an integrated PTC temperature sensor are processed in the Trafag ASIC electronics to calculate the density. The digital output signal is used in a chip-to-chip communication with the control unit. The key advantages of this cost-effective solution are the very compact design and the low project risk due to the use of well-proven sensing elements.

## Crank case pressure transmitter



### Features

- For low pressure measurement
- Crank case on large diesel engines

### Technical Data

|                             |                  |
|-----------------------------|------------------|
| Pressure range (relative)   | 0 ... 124 mbar   |
| Output signal (ratiometric) | 0.5 ... 4.5 VDC  |
| Electrical connection       | DIN72585         |
| Ambient temperature         | -25°C ... +105°C |

In large diesel engines the crank case pressure is an important indicator for the condition (wear) of the piston rings of diesel engines. Alternative technologies to detect the wear of piston rings only react after the piston ring is already defective while the small pressure changes give early indication of possible increased wear. A pressure transmitter in this application must withstand harsh conditions in terms of vibration and temperature and must maintain a high accuracy over a long lifetime. Trafag developed a new transmitter based on the well-tried EPN series, but extending the measurement range the thin-film-on-steel technology way beyond state-of-the-art towards low pressure down to 0...124 mbar. Due to the experience and expertise of Trafag in this field, the accuracy of the transmitter is high and stable over a long time in operational conditions.

# Transmitter 8 x overpressure safety, 0.3 % accuracy



| Technical Data            |                  |
|---------------------------|------------------|
| Temperature range         | -40°C ... +125°C |
| Pressure range (relative) | 0 ... 10 bar     |
| Burst pressure min.       | 300 bar          |
| Accuracy @ +25°C          | ± 0.3 % FS typ.  |

In water pump applications extreme pressure peaks often occur and can damage pressure transmitters. To avoid failures due to these pressure peaks, Trafag developed a transmitter with 8x overpressure safety and an accuracy of 0.3 % through extended calibration, selection of sensor elements and using high-performance electronics.

# On-board pressure transmitter OPT



| Technical Data              |                  |
|-----------------------------|------------------|
| Sensor material             | 1.4542/630       |
| Ambient temperature         | -25°C ... +100°C |
| Sensor temperature max.     | -25°C ... +100°C |
| Output signal (ratiometric) | 0.5 ... 4.5 VDC  |

The on-board transmitter for applications requiring a very compact solution directly applied to the pcb offers a wide media temperature and the excellent long-term stability of the thin-film-on-steel sensor technology. The high overpressure safety and the fully welded design allow the use in critical and very demanding applications.

# Pressure and temperature measuring instruments

## Pressure switches




Trafag's electromechanical pressure switches provide high vibration resistance and switch point precision in combination with an extremely robust and durable design. This results in switches that can be operated for decades without requiring maintenance, even under harsh conditions. Various designs with bellows, membrane and piston sensors cover a wide variety of pressure ranges, media and load profiles for many different applications. Pressostats are available with Ex- and ship approvals as well as with railway conformity.

Pressure switches



## Thermostats

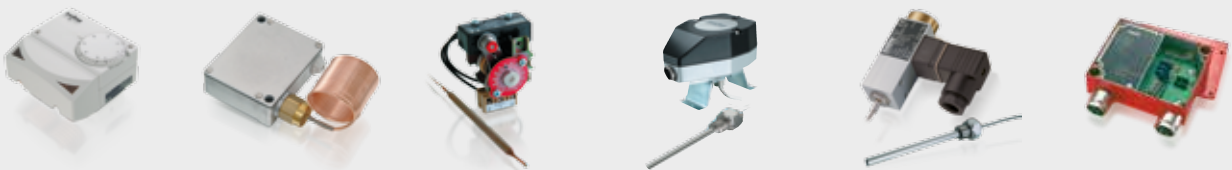

For 70 years Trafag thermostats have proven their robustness in order to withstand the most adverse environmental conditions. Industry usage ranges from air conditioning applications to engine and ship manufacturing and even to offshore oil and gas platform production. The appeal of Trafag thermostats lies in their high switching point precision even after decades of operation under harsh conditions without maintenance. Various sensor and casing designs cover a wide range of temperatures and possible applications. Thermostats are available with Ex- and ship approvals as well as with railway conformity.

Thermostats



# INDUSTRIAL PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The industrial pressure transmitter NAT 8252 features an exceptionally long-term stable thin-film-on-steel sensor cell with triple (optionally 5-fold) overpressure safety. Optionally, the NAT 8252 is available as a pressure switch with 1 or 2 switching outputs. The robust design and the wide temperature range from -40°C to +125°C qualify the NAT 8252 as the ideal solution for a wide range of demanding applications.



## Applications

- Machine tools
- Hydraulics
- HVAC
- Refrigeration
- Process technology
- Water treatment

## Features

- Smallest design
- Completely welded steel sensor system without additional seals
- Excellent long-term stability
- Optional: fivefold overpressure resistance
- Optional: Switching output 1 or 2 PNP transistors

### Technical Data

|                     |   |                      |   |
|---------------------|---|----------------------|---|
| Measuring principle | Thin film on steel  | Accuracy @ 25°C typ. | ± 0.5 % FS typ.   |
| Measuring range     | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi  | Media temperature    | -40°C ... +125°C  |
| Output signal       | 4 ... 20 mA, 0.5 ... 4.5 VDC, 0 ... 5 VDC,<br>1 ... 5 VDC, 1 ... 6 VDC, 0 ... 10 VDC,<br>0.1 ... 10.1 VDC,<br>0.5 ... 4.5 VDC ratiometric,<br>Switching output:<br>1 or 2 PNP transistors | Ambient temperature  | -40°C ... +125°C<br>(Cable PVC 22: -5°C ... +60°C)<br>(Cable PUR 24: -40°C ... +70°C) |

Subject to change

## Ordering information/type code

|                                      |   |                              |                             | 8252 . XX                               | XX                         | XX                          | XX    | XX | XX |
|--------------------------------------|---|------------------------------|-----------------------------|---|----------------------------|-----------------------------|-------|----|----|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range [bar]</b>                                     | <b>Over pressure [bar]</b>   | <b>Burst pressure [bar]</b> | <b>Pressure measurement range [psi]</b> | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |       |    |    |
|                                      | 0 ... 2.5   | 7.5                          | 50                          | 75                                      | 0 ... 30                   | 90                          | 700   | G5 |    |
|                                      | 0 ... 4   | 12                           | 60                          | 76                                      | 0 ... 50                   | 150                         | 850   | G6 |    |
|                                      | 0 ... 6   | 18                           | 100                         | 77                                      | 0 ... 100                  | 300                         | 1450  | G7 |    |
|                                      | 0 ... 10  | 30                           | 200                         | 78                                      | 0 ... 150                  | 450                         | 2500  | G8 |    |
|                                      | 0 ... 16  | 48                           | 200                         | 79                                      | 0 ... 200                  | 600                         | 2500  | GA |    |
|                                      | 0 ... 25  | 75                           | 300                         | 80                                      | 0 ... 250                  | 750                         | 2500  | G9 |    |
|                                      | 0 ... 40  | 120                          | 300                         | 81                                      | 0 ... 300                  | 900                         | 4000  | HA |    |
|                                      | 0 ... 60  | 180                          | 400                         | 82                                      | 0 ... 400                  | 1200                        | 4000  | H0 |    |
|                                      | 0 ... 100   | 300                          | 500                         | 83                                      | 0 ... 500                  | 1500                        | 4000  | H1 |    |
|                                      | 0 ... 160   | 480                          | 750                         | 85                                      | 0 ... 1000                 | 3000                        | 5000  | H2 |    |
|                                      | 0 ... 250   | 750                          | 1000                        | 74                                      | 0 ... 1500                 | 4500                        | 7000  | H3 |    |
|                                      | 0 ... 400   | 1000                         | 2000                        | 84                                      | 0 ... 2000                 | 6000                        | 10000 | H5 |    |
|                                      | 0 ... 600   | 1500                         | 2500                        | 86                                      | 0 ... 3000                 | 9000                        | 14500 | G4 |    |
|                                      | <b>Option 5P:</b>   | <b>Fivefold overpressure</b> |                             |   | 0 ... 5000                 | 12500                       | 21750 | H4 |    |
|                                      | 0 ... 2.5   | 12.5                         | 60                          | 55                                      | 0 ... 7500                 | 18750                       | 29000 | H6 |    |
|                                      | 0 ... 4   | 20                           | 100                         | 56                                      |                            |                             |       |    |    |
|                                      | 0 ... 6   | 30                           | 200                         | 57                                      |                            |                             |       |    |    |
|                                      | 0 ... 10  | 50                           | 200                         | 58                                      |                            |                             |       |    |    |
|                                      | 0 ... 16  | 80                           | 300                         | 59                                      |                            |                             |       |    |    |
|                                      | 0 ... 25  | 125                          | 300                         | 60                                      |                            |                             |       |    |    |
|                                      | 0 ... 40  | 200                          | 400                         | 61                                      |                            |                             |       |    |    |
|                                      | 0 ... 60  | 300                          | 500                         | 62                                      |                            |                             |       |    |    |
|                                      | 0 ... 100   | 500                          | 750                         | 63                                      |                            |                             |       |    |    |
| 0 ... 160                            | 800   | 1000                         | 65                          |   |                            |                             |       |    |    |
| <b>Sensor</b>                        | Relative pressure   |                              |                             |   |                            |                             | 25    |    |    |
| <b>Pressure connection</b>           | G1/4" male, seal: DIN 3869 (accessories 61/63/83)                           |                              |                             |   |                            |                             | 17    |    |    |
|                                      | G1/4" male (Manometer) EN 871 <sup>8)</sup>                                 |                              |                             |   |                            |                             | 53    |    |    |
|                                      | 1/4" NPT male   |                              |                             |   |                            |                             | 30    |    |    |
|                                      | 1/8" NPT male <sup>5) 9)</sup>  |                              |                             |   |                            |                             | 43    |    |    |
|                                      | 7/16"-20UNF female SAE J512 with valve opener <sup>4)</sup>                 |                              |                             |   |                            |                             | 24    |    |    |
|                                      | 7/16"-20UNF female SAE J512 without valve opener <sup>4)</sup>              |                              |                             |   |                            |                             | 44    |    |    |
|                                      | 7/16"-20UNF male, DIN3866 <sup>4)</sup>                                     |                              |                             |   |                            |                             | 18    |    |    |
|                                      | 7/16"-20UNF SAE4 male, seal: accessory 61 <sup>8)</sup>                     |                              |                             |   |                            |                             | 42    |    |    |
|                                      | R1/4" male, DIN3858 <sup>5)</sup>   |                              |                             |   |                            |                             | 19    |    |    |
|                                      | R1/4" male, DIN2999 <sup>5) 9)</sup>  |                              |                             |   |                            |                             | 20    |    |    |
|                                      | R1/8" male, DIN3858 <sup>5)</sup>   |                              |                             |   |                            |                             | 16    |    |    |
|                                      | M10x1 male, DIN EN ISO 6149-2   |                              |                             |   |                            |                             | 32    |    |    |
|                                      | M12x1.5 male, DIN EN ISO 9974-2 <sup>9)</sup>                               |                              |                             |   |                            |                             | 49    |    |    |
| <b>Electrical connection</b>         | Male electrical plug, industrial standard, contact distance 9.4 mm, Mat. PA |                              |                             |   |                            |                             | 01    |    |    |
|                                      | Male electrical plug M12x1, 4-pole, Mat. PA                                 |                              |                             |   |                            |                             | 32    |    |    |
|                                      | Male electrical plug M12x1, 5-pole, Mat. PA                                 |                              |                             |   |                            |                             | 35    |    |    |
|                                      | Male electrical plug MIL-C 26482, 6-pole, metal                             |                              |                             |   |                            |                             | 02    |    |    |
|                                      | Cable IP67, Mat. PVC <sup>7)</sup>  |                              |                             |   |                            |                             | 22    |    |    |
|                                      | Cable IP67, Mat. PUR <sup>7)</sup>  |                              |                             |   |                            |                             | 24    |    |    |
|                                      | Cable IP67, Mat. EPD Raychem FDR25 <sup>7)</sup>                            |                              |                             |   |                            |                             | 08    |    |    |

| Output signal      | Signal output   | Load resistance | I (supply) | U (supply)            |    |
|--------------------|---|-----------------|------------|-----------------------|----|
|                    | 4 ... 20 mA   | See graphic     |            | 24 (9 ... 32) VDC     | 19 |
|                    | 0.5 ... 4.5 VDC   | ≥ 5.0 kΩ to Us- | ≤ 20 mA    | 24 (9 ... 32) VDC     | 20 |
|                    | 0 ... 5 VDC   | ≥ 5.0 kΩ to Us- | ≤ 20 mA    | 24 (9 ... 32) VDC     | 14 |
|                    | 1 ... 5 VDC   | ≥ 5.0 kΩ to Us- | ≤ 20 mA    | 24 (9 ... 32) VDC     | 25 |
|                    | 1 ... 6 VDC   | ≥ 5.0 kΩ to Us- | ≤ 20 mA    | 24 (9 ... 32) VDC     | 16 |
|                    | 0 ... 10 VDC  | ≥ 5.0 kΩ to Us- | ≤ 15 mA    | 24 (15 ... 32) VDC    | 17 |
|                    | 0.1 ... 10.1 VDC  | ≥ 5.0 kΩ to Us- | ≤ 15 mA    | 24 (15 ... 32) VDC    | 13 |
|                    | 0.5 ... 4.5 VDC ratiometric   | ≥ 5.0 kΩ to Us- | ≤ 10 mA    | 5 (4.75 ... 5.25) VDC | 23 |
|                    | 2 PNP transistors <sup>3)</sup>   |                 | ≤ 10 mA    | 24 (9 ... 32) VDC     | PS |
|                    | 1 PNP transistor <sup>3)</sup>  |                 | ≤ 10 mA    | 24 (9 ... 32) VDC     | T1 |
| <b>Accessories</b> | Female electrical plug M12x1, 5-pole <sup>2)</sup>  |                 |            |                       | 33 |
|                    | Female electrical connector industrial standard (for electrical connection 01)  |                 |            |                       | 34 |
|                    | Pressure peak damping element ø 1.0 mm <sup>4)</sup>  |                 |            |                       | 40 |
|                    | Pressure peak damping element ø 0.4 mm <sup>4)</sup>  |                 |            |                       | 44 |
|                    | Seal FPM, -18°C ... +125°C  |                 |            |                       | 61 |
|                    | Seal EPDM, -40°C ... +125°C   |                 |            |                       | 63 |
|                    | Seal NBR, -25°C ... +100°C  |                 |            |                       | 83 |
|                    | Special electrical connection: Pin 2 +, Pin 3 ground, Pin 4 -<br>(only for output signal 19 and male electrical plug 01, industrial standard)                                     |                 |            |                       | 90 |
|                    | Special electrical connection: Pin 1 out, Pin 2 +, Pin 3 ground, Pin 4 -<br>(only for output signals 14, 16, 17, 23 and male electrical plug 01, industrial standard)             |                 |            |                       | 91 |
|                    | Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 3 Out, Pin 4 -<br>(only for output signals 13, 14, 16, 17, 20, 23, 25 and male electrical plug 32, M12x1, 4-pole)       |                 |            |                       | 95 |
|                    | Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 3 -, Pin 4 Out<br>(only for output signals 14, 16, 17, 23 and male electrical plug 32, M12x1, 4-pole)                   |                 |            |                       | 96 |
|                    | Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 ground<br>(only for output signal 19 and male electrical plug 01, industrial standard)                                     |                 |            |                       | 92 |
|                    | Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 ground<br>(only for output signal 19 and male electrical plug 32, M12x1, 4-pole)   |                 |            |                       | E1 |
|                    | Special electrical connection: Pin 1 +, Pin 2 -, Pin 3 out, Pin 4 ground<br>(only for output signals 14, 16, 17, 23 and male electrical plug 32, M12x1, 4-pole)                   |                 |            |                       | E2 |
|                    | Special electrical connection: Pin 1 Out, Pin 2 -, Pin 3 +, Pin 4 ground<br>(only for output signals 13, 14, 16, 17, 20, 23, 25 and male electrical plug 01, industrial standard) |                 |            |                       | E3 |
|                    | Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 4 -<br>(only for output signal 19 and male electrical plug 32, M12x1, 4-pole)   |                 |            |                       | E6 |
|                    | Cable length 0.5 m  |                 |            |                       | EM |
|                    | Cable length 1.0 m  |                 |            |                       | 1M |
|                    | Cable length 2.0 m  |                 |            |                       | 2M |
|                    | Parameterisation according to customer specification for output signal PS, T1 (see table parameter)   |                 |            |                       | ZC |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> For electrical connections 32 and 35

<sup>3)</sup> Only with electrical connections 32, 22, 24, 08

<sup>4)</sup> Max. allowable pressure range 60 bar at 120 bar overpressure

<sup>5)</sup> Max. allowable pressure range 160 bar at 500 bar overpressure

<sup>6)</sup> Only for pressure connections 17, 30, 32

<sup>7)</sup> Cable length see accessories

<sup>8)</sup> According to norm J1926, max. 35 MPa

<sup>9)</sup> Upon request

## Standard products (extra short lead time)

| Product No. | Type Code                             | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|---------------------------------------|----------------------|--------------------------|--------------|--------------------------|
| NAT2.5A     | 8252 75 2517 01 0000 0000 19 34 44 61 | 0 ... 2.5            | 7.5                      | 9 ... 32     | ±0.5                     |
| NAT4.0A     | 8252 76 2517 01 0000 0000 19 34 44 61 | 0 ... 4              | 12                       | 9 ... 32     | ±0.5                     |
| NAT6.0A     | 8252 77 2517 01 0000 0000 19 34 44 61 | 0 ... 6              | 18                       | 9...32       | ±0.5                     |
| NAT10.0A    | 8252 78 2517 01 0000 0000 19 34 44 61 | 0 ... 10             | 30                       | 9...32       | ±0.5                     |
| NAT16.0A    | 8252 79 2517 01 0000 0000 19 34 44 61 | 0 ... 16             | 48                       | 9 ... 32     | ±0.5                     |
| NAT25.0A    | 8252 80 2517 01 0000 0000 19 34 44 61 | 0 ... 25             | 75                       | 9 ... 32     | ±0.5                     |
| NAT40.0A    | 8252 81 2517 01 0000 0000 19 34 44 61 | 0 ... 40             | 120                      | 9 ... 32     | ±0.5                     |
| NAT100.0A   | 8252 83 2517 01 0000 0000 19 34 44 61 | 0 ... 100            | 300                      | 9 ... 32     | ±0.5                     |
| NAT250.0A   | 8252 74 2517 01 0000 0000 19 34 44 61 | 0 ... 250            | 750                      | 9 ... 32     | ±0.5                     |
| NAT400.0A   | 8252 84 2517 01 0000 0000 19 34 44 61 | 0 ... 400            | 1000                     | 9 ... 32     | ±0.5                     |
| NAT600.0A   | 8252 86 2517 01 0000 0000 19 34 44 61 | 0 ... 600            | 1500                     | 9 ... 32     | ±0.5                     |
| NAT2.5V     | 8252 75 2517 01 0000 0000 17 34 44 61 | 0 ... 2.5            | 7.5                      | 15 ... 32    | ±0.5                     |
| NAT4.0V     | 8252 76 2517 01 0000 0000 17 34 44 61 | 0 ... 4              | 12                       | 15 ... 32    | ±0.5                     |
| NAT6.0V     | 8252 77 2517 01 0000 0000 17 34 44 61 | 0 ... 6              | 18                       | 15 ... 32    | ±0.5                     |
| NAT10.0V    | 8252 78 2517 01 0000 0000 17 34 44 61 | 0 ... 10             | 30                       | 15 ... 32    | ±0.5                     |
| NAT16.0V    | 8252 79 2517 01 0000 0000 17 34 44 61 | 0 ... 16             | 48                       | 15 ... 32    | ±0.5                     |
| NAT25.0V    | 8252 80 2517 01 0000 0000 17 34 44 61 | 0 ... 25             | 75                       | 15 ... 32    | ±0.5                     |
| NAT40.0V    | 8252 81 2517 01 0000 0000 17 34 44 61 | 0 ... 40             | 120                      | 15 ... 32    | ±0.5                     |
| NAT100.0V   | 8252 83 2517 01 0000 0000 17 34 44 61 | 0 ... 100            | 300                      | 15 ... 32    | ±0.5                     |
| NAT250.0V   | 8252 74 2517 01 0000 0000 17 34 44 61 | 0 ... 250            | 750                      | 15 ... 32    | ±0.5                     |
| NAT400.0V   | 8252 84 2517 01 0000 0000 17 34 44 61 | 0 ... 400            | 1000                     | 15 ... 32    | ±0.5                     |
| NAT600.0V   | 8252 86 2517 01 0000 0000 17 34 44 61 | 0 ... 600            | 1500                     | 15 ... 32    | ±0.5                     |



| Parameter  |                                 |  |            |                                    |
|--|---------------------------------|--|------------|------------------------------------|
| Name   | Standard setting (accessory ZS) | Value range  | Short name | Customer adjustment (accessory ZC) |
| Switch point SP1 (hysteresis mode)<br>Upper switch point FH1 (window mode)                             | 75 % Measuring range            | > RP1, FL1<br>Hysteresis $\geq$ 1 % FS   | SP1        |                                    |
| Reset point RP1 (hysteresis mode)<br>Lower switch point FL1 (window mode)                              | 25 % Measuring range            | < SP1, FH1<br>Hysteresis $\geq$ 1 % FS   | RP1        |                                    |
| Switch point SP2 (hysteresis mode)<br>Upper switch point FH2 (window mode)                             | 75 % Measuring range            | > RP2, FL2<br>Hysteresis $\geq$ 1 % FS   | SP2        |                                    |
| Reset point RP2 (hysteresis mode)<br>Lower switch point FL2 (window mode)                              | 25 % Measuring range            | < SP2, FH2<br>Hysteresis $\geq$ 1 % FS   | RP2        |                                    |
| Switch point delay time SP1 / RP1 (hysteresis mode)<br>Switch point delay time FH1 / FL1 (window mode) | 0                               | 0; 2 <sup>x</sup> [ms], x = 3, 4 ... 16  | dS1        |                                    |
| Switch point delay time SP2 / RP2 (hysteresis mode)<br>Switch point delay time FH2 / FL2 (window mode) | 0                               | 0; 2 <sup>x</sup> [ms], x = 3, 4 ... 16  | dS2        |                                    |
| Functions switching output 1   | Hysteresis, closer (Hno)        | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno),<br>Window NC (Fnc)                 | ou1        |                                    |
| Functions switching output 2   | Hysteresis, closer (Hno)        | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno),<br>Window NC (Fnc)<br>Device ready | ou2        |                                    |

## Parameterization of switching points

The switching points, delay times and output functions can be parameterized via Smartphone app (Android). The SMI Sensor Master Interface required for the parameterization as well as the Smartphone are not part of the delivery. The Android App is available for free in the Google Play Store.

- Ordering No. SMI Sensor Master Interface: F90170 (available from the 2nd quarter of 2018)
- Data sheet SMI Sensor Master Interface: H72618



| Specifications                  |  |   |
|---------------------------------|--|---|
| <b>Electrical Data</b>          | Output / supply voltage  | 4 ... 20 mA: 24 (9...32) VDC<br>0.5 ... 4.5 VDC: 24 (9...32) VDC<br>0 ... 5 VDC: 24 (9...32) VDC<br>1 ... 5 VDC: 24 (9...32) VDC<br>1 ... 6 VDC: 24 (9...32) VDC<br>0 ... 10 VDC: 24 (15...32) VDC<br>0.1 ... 10.1 VDC: 24 (15...32) VDC<br>0.5 ... 4.5 VDC ratiom.,<br>10 ... 90% $U_{supply}$ : $5 \pm 0.25$ VDC<br>1 or 2 PNP transistors: 24 (9...32) VDC |
|                                 | Rise time  | Typ. 1 ms / 10 ... 90 % nominal pressure  |
|                                 | Switch-on-delay pressure transmitters                                    | 100 ms  |
|                                 | Switch-on-delay pressure switches  | 50 ms + switching delay time  |
|                                 | Inverse-polarity protection, short-circuit strenght @ 25°C during 5 min. | 4...20 mA: to $U_s = 32$ VDC<br>0.5...4.5 VDC, 0...5 VDC, 1...5 VDC, 1...6 VDC,<br>0...10 VDC, 0.1...10.1 VDC: to $U_s = 28$ VDC<br>0.5...4.5 VDC ratiometric: to $U_s = 14$ VDC<br>1 or 2 PNP transistors: to $U_s = 32$ VDC   |
| <b>Environmental conditions</b> | Media temperature  | -40°C ... +125°C  |
|                                 | Ambient temperature  | -40°C ... +125°C<br>(Cable PVC 22: -5°C ... +60°C)<br>(Cable PUR 24: -40°C ... +70°C)   |
|                                 | Protection <sup>1)</sup>   | IP65, IP67  |
|                                 | Humidity   | Max. 95 % relative  |
|                                 | Vibration  | 15 g RMS (20...2000 Hz) (EN60068-2-64)<br>25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C)<br>(EN60068-2-6)   |
|                                 | Shock  | 50 g / 11 ms<br>100 g / 6 ms Male electrical plug M12x1<br>(EN60068-2-27) <sup>2)</sup>   |
| <b>EMC Protection</b>           | Emission   | EN/IEC 61000-6-3  |
|                                 | Immunity   | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)  | 1.4542 (AISI630)  |
|                                 | Pressure connection (wetted parts)                                       | 1.4542 (AISI630)  |
|                                 | Housing  | 1.4301 (AISI304)  |
|                                 | Sealing  | FPM/EPDM/NBR  |
|                                 | Male electrical plug   | See ordering information  |
|                                 | Weight   | appr. 50 g  |
|                                 | Mounting torque  | 25 Nm   |

<sup>1)</sup> See electrical connection

<sup>2)</sup> For electrical connections 32 and 35


## Analogue output

|           |  |               |        |
|-----------|--|---------------|--------|
| Accuracy  | TEB @ -25 ... +85°C                      | [% FS typ.]   | ± 1.75 |
|           | Accuracy @ +25°C                         | [% FS typ.]   | ± 0.5  |
|           | NLH @ +25°C (BSL)                        | [% FS typ.]   | ± 0.2  |
|           | TC zero point and span                   | [% FS/K typ.] | ± 0.03 |
|           | Long term stability 1 year               | [% FS typ.]   | ± 0.1  |
| Rise time | Typ. 1 ms / 10 ... 90 % nominal pressure |               |        |


## Switching output

|                                  |  |                                 |   |
|----------------------------------|--|---------------------------------|---|
| Accuracy                         | TEB @ -25 ... +85°C  | [% FS typ.]                     | ± 1.75                                    |
|                                  | Accuracy @ +25°C   | [% FS typ.]                     | ± 0.5                                     |
|                                  | Long term stability 1 year                                   | [% FS typ.]                     | ± 0.1                                     |
| Adjustment range of switchpoints | 1 ... 99 % FS  |                                 |   |
| Distance switch point            | ≥ 1.0 % FS   |                                 |   |
| Switch point > reset point       | Switchpoint > reset point                                    |                                 |   |
| Switching resistance             | ≤ 3 Ω  |                                 |   |
| Output function                  | Hysteresis, Window; normally closed (NO), normally open (NC) |                                 |   |
| Switching current                | -40°C ... +85°C  | (Ambient and media temperature) | ≤ 400 mA, total of both switching outputs |
|                                  | +85°C ... +125°C   | (Ambient and media temperature) | ≤ 200 mA, total of both switching outputs |
| Current limiting                 | integrated   |                                 |   |
| Delay time                       | 0; 2 <sup>x</sup> [ms], x = 3, 4 ... 16                      |                                 |   |
| Switching frequency              | max. 60 Hz (at switching delay time = 0)                     |                                 |   |


## Measuring accuracy

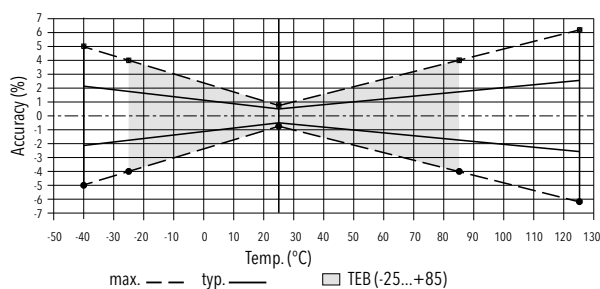


## Dimensions

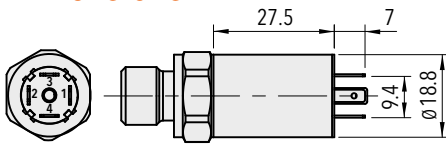


8252.XX.XXXX.01.XX.XX

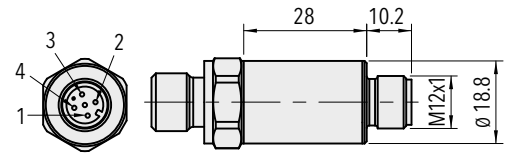


8252.XX.XXXX.32.XX.XX

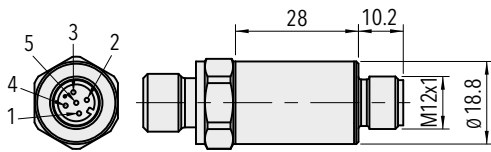


8252.XX.XXXX.35.XX.XX

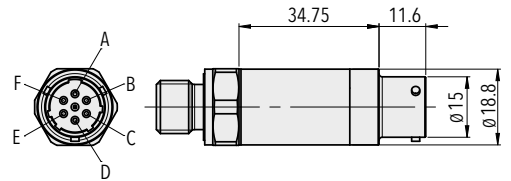


8252.XX.XXXX.02.XX.XX

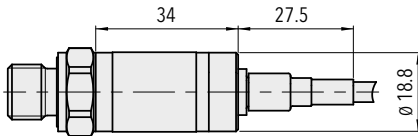


8252.XX.XXXX.22/24/08.XX.XX




8252.XX.XX17.XX.XX.XX




8252.XX.XX53.XX.XX.XX




8252.XX.XX30.XX.XX.XX




8252.XX.XX43.XX.XX.XX




8252.XX.XX24.XX.XX.XX




8252.XX.XX44.XX.XX.XX




8252.XX.XX18.XX.XX.XX




8252.XX.XX42.XX.XX.XX




8252.XX.XX19.XX.XX.XX




8252.XX.XX20.XX.XX.XX




8252.XX.XX16.XX.XX.XX




8252.XX.XX32.XX.XX.XX



8252.XX.XX49.XX.XX.XX







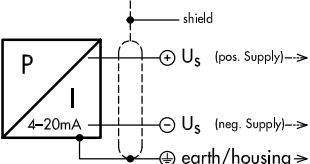
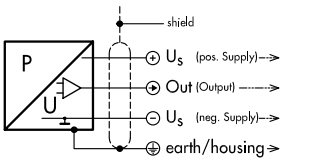






8252.XX.XXXX.XX.XX.33



8252.XX.XXXX.XX.XX.34

## Electrical connection



|               |   | Protection / electrical connection  |           |   |           |  |   |   |   |   |       |   |  |
|---------------|---|---|-----------|---|-----------|--|---|---|---|---|-------|---|--|
|               |   | IP65 *)**)  |           | IP67 *)**)  |           |  |   | IP67*)**)   |   | IP67**)   |       |   |  |
|               |   | Industrial standard<br>Contact distance<br>9.4 mm                                 |           | M12x1   |           |  |   | MIL-C 26482   |   | Cable   |       |   |  |
|               |   | <b>01</b>   |           | 4-pole<br><b>32</b>   |           | 5-pole<br><b>35</b>  |   | <b>02</b>   |   | <b>22/24</b>  |       | <b>08</b>   |  |
|               |   |  |           |  |           |  |   |  |   |  |       |  |  |
| Output signal |  <p><b>8252.XX.XXXX.XX.19</b></p>                  | <b>90</b>   | <b>92</b> | <b>E1</b>   | <b>E6</b> |  |   |   |   |   |       |   |  |
|               |  <p><b>8252.XX.XXXXXX.13/14/16/17/20/23/25</b></p> | <b>91</b>   | <b>E3</b> | <b>95</b>   | <b>96</b> | <b>E2</b>  |   |   |   |   |       |   |  |
|               |   | 2   | 2         | 1   | 1         | 1  | 1 | 4   | A | white   | red   |   |  |
|               |   | 1   | 4         | 2   | 3         | 2  | 4 | 1   | B | brown   | black |   |  |
|               |   | 4   | 3         | 4   | 4         | 4  | 2 | 5   | E | yellow  | green |   |  |
|               |   | 1   | 2         | 3   | 1         | 1  | 1 | 2   |   | white   | red   |   |  |
|               |   | 2   | 1         | 1   | 2         | 3  | 4 | 4   |   | green   | white |   |  |
|               |   | 3   | 4         | 2   | 3         | 4  | 3 | 3   |   | brown   | black |   |  |
|               |   | 4   | 3         | 4   | 4         | 2  | 4 | 5   |   | yellow  | green |   |  |
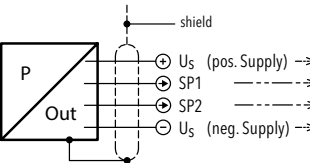
|               |   | Protection / electrical connection  |           |   |           |   |           |
|---------------|---|---|-----------|---|-----------|---|-----------|
|               |   | IP67 *)**)  |           | IP67**)   |           | IP67**)   |           |
|               |   | M12x1<br>4-pole   |           | Cable   |           | Cable   |           |
|               |   | <b>32</b>   |           | <b>22/24</b>  |           | <b>08</b>   |           |
|               |   |  |           |  |           |  |           |
| Output signal |  <p><b>8252.XX.XXXX.XX.PS/T1</b></p> | <b>PS</b>   | <b>T1</b> | <b>PS</b>   | <b>T1</b> | <b>PS</b>   | <b>T1</b> |
|               |   | 1   | 1         | white   | white     | red   | red       |
|               | 4   | 4   | green     | green   | white     | white   |           |
|               | 2   | -   | yellow    | -   | green     | green   |           |
|               | 3   | 3   | brown     | brown   | black     | black   |           |

\*) Provided female connector is mounted according to instructions


\*\*) Ventilation via male electric plug/cable end

4...20mA: min./max resistor vs. supply voltage @ Pmax = 100%

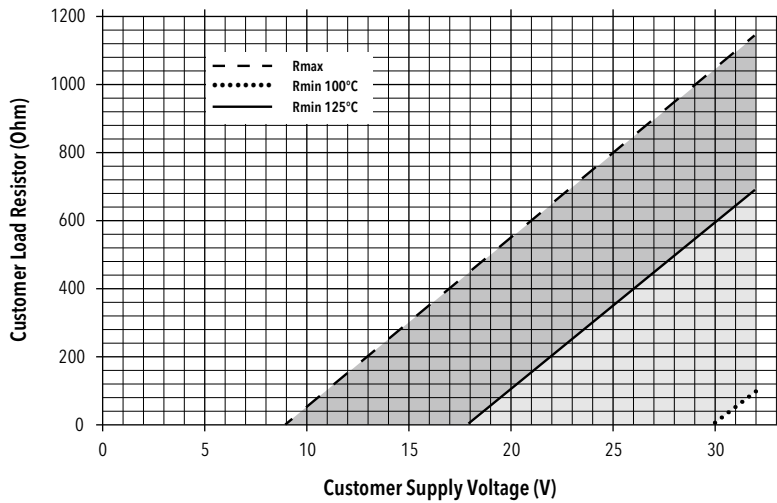

Connection of loads to switch contacts

## Functions switching output

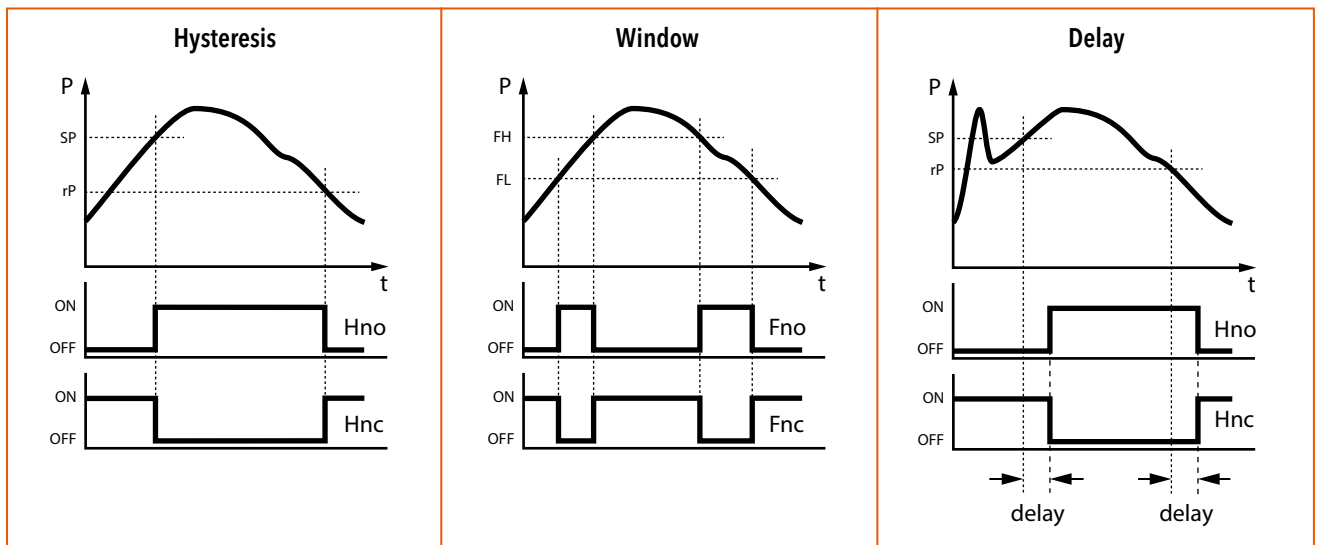

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72303">www.trafag.com/H72303</a> |
| Instructions | <a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a> |
| Flyer        | <a href="http://www.trafag.com/H70666">www.trafag.com/H70666</a> |

# HYDRAULIC PRESSURE TRANSMITTER

New generation available - refer to [www.trafag.com/H72304](http://www.trafag.com/H72304)

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Machine tools
- Hydraulics
- Process technology
- Water treatment
- Test benches

## Features

- Smallest design
- Accuracy classes 0.1%, 0.3%
- Excellent temperature resistance
- Improved vibration resistance
- Completely welded steel sensor system without additional seals

| Technical Data      |   |                      |  |
|---------------------|---|----------------------|--|
| Measuring principle | Thin film on steel  | Accuracy @ 25°C typ. | ± 0.3 % FS typ.<br>± 0.15 % FS typ.<br>± 0.1 % FS typ. |
| Measuring range     | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi                            | Media temperature    | -40°C ... +125°C                                       |
| Output signal       | 4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC,<br>0 ... 10 VDC, 0.5 ... 4.5 VDC ratiometric | Ambient temperature  | -40°C ... +125°C                                       |

Subject to change

## Ordering information/type code

| Measuring range <sup>1)</sup> | Pressure measurement range [bar]   | Over pressure [bar]                | Burst pressure [bar] | Pressure measurement range [psi] | Over pressure [psi]         | Burst pressure [psi] | 8253 . XX | XX | XX | XX | XX | XX |    |    |
|-------------------------------|--|------------------------------------|----------------------|----------------------------------|-----------------------------|----------------------|-----------|----|----|----|----|----|----|----|
|                               |  | 0 ... 2.5 <sup>2)</sup>            | 5                    | 50                               | 0 ... 30                    | 60                   | 700       | G5 |    |    |    |    |    |    |
|                               | 0 ... 4  | 8                                  | 60                   | 0 ... 50                         | 100                         | 850                  | G6        |    |    |    |    |    |    |    |
|                               | 0 ... 6  | 12                                 | 100                  | 0 ... 100                        | 200                         | 1450                 | G7        |    |    |    |    |    |    |    |
|                               | 0 ... 10   | 20                                 | 200                  | 0 ... 150                        | 300                         | 2500                 | G8        |    |    |    |    |    |    |    |
|                               | 0 ... 16   | 32                                 | 200                  | 0 ... 200                        | 400                         | 2500                 | GA        |    |    |    |    |    |    |    |
|                               | 0 ... 25   | 50                                 | 300                  | 0 ... 250                        | 500                         | 2500                 | G9        |    |    |    |    |    |    |    |
|                               | 0 ... 40   | 80                                 | 300                  | 0 ... 300                        | 600                         | 4000                 | HA        |    |    |    |    |    |    |    |
|                               | 0 ... 60   | 120                                | 400                  | 0 ... 400                        | 800                         | 4000                 | H0        |    |    |    |    |    |    |    |
|                               | 0 ... 100  | 200                                | 500                  | 0 ... 500                        | 1000                        | 4000                 | H1        |    |    |    |    |    |    |    |
|                               | 0 ... 160  | 320                                | 750                  | 0 ... 1000                       | 2000                        | 5000                 | H2        |    |    |    |    |    |    |    |
|                               | 0 ... 250  | 500                                | 1000                 | 0 ... 1500                       | 3000                        | 7000                 | H3        |    |    |    |    |    |    |    |
|                               | 0 ... 400  | 800                                | 1500                 | 0 ... 2000                       | 4000                        | 10000                | H5        |    |    |    |    |    |    |    |
|                               | 0 ... 600  | 1000                               | 2000                 | 0 ... 3000                       | 6000                        | 14500                | G4        |    |    |    |    |    |    |    |
|                               |  |                                    |                      | 0 ... 5000                       | 10000                       | 21750                | H4        |    |    |    |    |    |    |    |
|                               |  |                                    |                      | 0 ... 7500                       | 15000                       | 29000                | H6        |    |    |    |    |    |    |    |
| <b>Sensor</b>                 | Relative pressure, accuracy: 0.3 %   |                                    |                      |                                  |                             |                      |           | 23 |    |    |    |    |    |    |
|                               | Relative pressure, accuracy: 0.15 %  |                                    |                      |                                  |                             |                      |           | 21 |    |    |    |    |    |    |
|                               | Relative pressure, accuracy: 0.1 %   |                                    |                      |                                  |                             |                      |           | 24 |    |    |    |    |    |    |
|                               | Absolute pressure, accuracy: 0.3 %   |                                    |                      |                                  |                             |                      |           | 43 |    |    |    |    |    |    |
|                               | Absolute pressure, accuracy: 0.15 %  |                                    |                      |                                  |                             |                      |           | 41 |    |    |    |    |    |    |
|                               | Absolute pressure, accuracy: 0.1 %   |                                    |                      |                                  |                             |                      |           | 44 |    |    |    |    |    |    |
| <b>Pressure connection</b>    | G1/4" male (Seal)  |                                    |                      |                                  |                             |                      |           |    | 17 |    |    |    |    |    |
|                               | 1/4" NPT male  |                                    |                      |                                  |                             |                      |           |    | 30 |    |    |    |    |    |
|                               | 7/16"-20UNF male <sup>3) 4)</sup>  |                                    |                      |                                  |                             |                      |           |    | 18 |    |    |    |    |    |
|                               | 7/16"-20UNF female, DIN3866 (valve opener) <sup>3) 4)</sup>  |                                    |                      |                                  |                             |                      |           |    | 24 |    |    |    |    |    |
|                               | 7/16"-20UNF male SAE4 <sup>7)</sup>  |                                    |                      |                                  |                             |                      |           |    | 42 |    |    |    |    |    |
| <b>Electrical connection</b>  | Male electrical plug, industrial standard (contact distance 9.4 mm), Mat. PBT  |                                    |                      |                                  |                             |                      |           |    |    | 01 |    |    |    |    |
|                               | Male electrical plug M12x1, 4-pole, Mat. PBT   |                                    |                      |                                  |                             |                      |           |    |    | 32 |    |    |    |    |
|                               | Male electrical plug M12x1, 5-pole, Mat. PBT   |                                    |                      |                                  |                             |                      |           |    |    | 35 |    |    |    |    |
| <b>Output signal</b>          | <b>Signal output</b>   | <b>Load resistance</b>             |                      | <b>I (supply)</b>                |                             | <b>U (supply)</b>    |           |    |    |    |    |    |    |    |
|                               | 4 ... 20 mA  | (U <sub>supply</sub> -9 V) / 20 mA |                      |                                  |                             | 24 (9 ... 32) VDC    |           |    |    |    |    | 19 |    |    |
|                               | 0 ... 5 VDC  | ≥ 2.0 kΩ                           |                      | ≤ 10 mA                          |                             | 24 (9 ... 32) VDC    |           |    |    |    |    | 14 |    |    |
|                               | 1 ... 6 VDC  | ≥ 2.0 kΩ                           |                      | ≤ 10 mA                          |                             | 24 (9 ... 32) VDC    |           |    |    |    |    | 16 |    |    |
|                               | 0 ... 10 VDC   | ≥ 5.0 kΩ                           |                      | ≤ 10 mA                          |                             | 24 (15 ... 32) VDC   |           |    |    |    |    | 17 |    |    |
| 0.5 ... 4.5 VDC               | ≥ 2.0 kΩ   |                                    | ≤ 10 mA              |                                  | 5 (4.5 ... 5.5) VDC ratiom. |                      |           |    |    |    | 23 |    |    |    |
| <b>Accessories</b>            | Female electrical plug M12x1, 5-pole, for electrical connections 32 and 35   |                                    |                      |                                  |                             |                      |           |    |    |    |    |    | 33 |    |
|                               | Female electrical connector industrial standard  |                                    |                      |                                  |                             |                      |           |    |    |    |    |    |    | 34 |
|                               | Meets EN50155 (railways) dielectrical strength: 500 VAC, 50 Hz <sup>5)</sup>   |                                    |                      |                                  |                             |                      |           |    |    |    |    |    |    | 11 |
|                               | Pressure peak damping element ø 1.0 mm <sup>6)</sup>   |                                    |                      |                                  |                             |                      |           |    |    |    |    |    |    | 40 |
|                               | Pressure peak damping element ø 0.3 mm <sup>6)</sup>   |                                    |                      |                                  |                             |                      |           |    |    |    |    |    |    | 43 |
|                               | Pressure peak damping element ø 0.5 mm <sup>6)</sup>   |                                    |                      |                                  |                             |                      |           |    |    |    |    |    |    | 45 |
|                               | Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 3 -, Pin 4 Out (only for output signals 14, 16, 17, 23 and male electrical plug 32, M12x1, 4-pole) |                                    |                      |                                  |                             |                      |           |    |    |    |    |    |    | 96 |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Measuring accuracy 0.3 %

<sup>3)</sup> Relative pressure only

<sup>4)</sup> Max. allowable pressure range 40 bar

<sup>5)</sup> Only with output 19

<sup>6)</sup> Only for pressure connections 17 and 30


<sup>7)</sup> According to norm J1926, max. 35 MPa




Identical construction with higher/lower specifications:  
Data sheet No. H72250, H72301




## Dimensions




8253.XX.XXXX.01.XX.XX

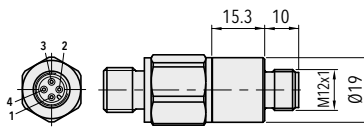


8253.XX.XXXX.32.XX.XX

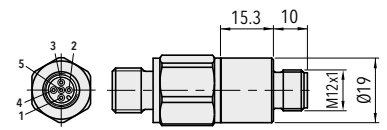


8253.XX.XXXX.35.XX.XX




8253.XX.2317.XX.XX.XX  
8253.XX.2117.XX.XX.XX




8253.XX.2318.XX.XX.XX  
8253.XX.2118.XX.XX.XX




8253.XX.2330.XX.XX.XX  
8253.XX.2130.XX.XX.XX




8253.XX.2324.XX.XX.XX  
8253.XX.2124.XX.XX.XX




8253.XX.4317.XX.XX.XX  
8253.XX.4117.XX.XX.XX




8253.XX.4330.XX.XX.XX  
8253.XX.4130.XX.XX.XX



8253.XX.XX42.XX.XX.XX



8253.XX.XXXX.XX.XX.33




8253.XX.XXXX.XX.XX.34

| Specifications                  |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Electrical Data</b>          | Output / supply voltage            | 4 ... 20 mA: 24 (9 ... 32) VDC<br>0 ... 5 VDC: 24 (9 ... 32) VDC<br>1 ... 6 VDC: 24 (9 ... 32) VDC<br>0 ... 10 VDC: 24 (15 ... 32) VDC<br>0.5 ... 4.5 VDC: 5 VDC ratiom. |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure   |
|                                 | Switch-on-delay                    | 1 s  |
| <b>Environmental conditions</b> | Media temperature                  | -40°C ... +125°C   |
|                                 | Ambient temperature                | -40°C ... +125°C   |
|                                 | Protection <sup>1)</sup>           | Min. IP65  |
|                                 | Humidity                           | Max. 95 % relative   |
|                                 | Vibration                          | 40 g (20...2000 Hz)  |
|                                 | Shock                              | 100 g / 11 ms  |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-4   |
|                                 | Immunity                           | EN/IEC 61000-6-2   |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4542 (AISI630)   |
|                                 | Pressure connection (wetted parts) | Pressure ranges ≤ 250 bar: 1.4542 (AISI630)<br>Pressure ranges > 250 bar: 1.4301 (AISI304)   |
|                                 | Housing                            | 1.4301 (AISI304)   |
|                                 | Sealing                            | FKM 70 Sh  |
|                                 | Male electrical plug               | See ordering information   |
|                                 | Weight                             | ~ 50 g   |
|                                 | Mounting torque                    | 25 Nm  |


<sup>1)</sup> See electrical connection

| Accuracy                                   |               | Measuring accuracy<br>0.3 %<br>Ordering No. 23/43 | Measuring accuracy<br>0.15 %<br>Ordering No. 21/41 | Measuring accuracy<br>0.1 %<br>Ordering No. 24/44 |
|--|---------------|---|--|---|
| TEB @ -25...+85°C                          | [% FS typ.]   | ± 1.0   | ± 0.5  | ± 0.4 (0 ... 65°C)                                |
| TEB @ -25...+85°C;<br>0...4 to 0...100 bar | [% FS typ.]   | -   | -  | ± 0.4   |
| TEB @ 0...+65°C;<br>0...4 to 0...100 bar   | [% FS typ.]   | -   | -  | ± 0.25  |
| Accuracy @ +25°C                           | [% FS typ.]   | ± 0.3   | ± 0.15   | ± 0.1   |
| NLH @ +25°C (BSL)                          | [% FS typ.]   | ± 0.2   | ± 0.1  | ± 0.1   |
| TC zero point and span                     | [% FS/K typ.] | ± 0.01  | ± 0.002  | ± 0.002   |
| Long term stability 1 year @<br>+25°C      | [% FS typ.]   | < ± 0.1   | < ± 0.1  | < ± 0.1   |

## Measuring accuracy 0.3 %

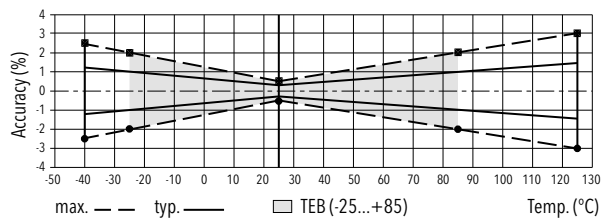

## Measuring accuracy 0.15 %

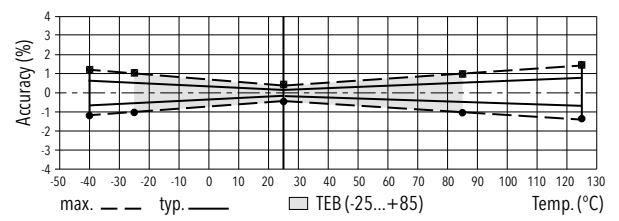

## Electrical Connection

|               |  | Protection / electrical connection   |                     |           |                     |
|---------------|--|--------------------------------------|---------------------|-----------|---------------------|
|               |  | IP65*)                               | IP67*)              |           |                     |
|               |  | Industrial standard<br>EN175301-803A | M12x1               |           |                     |
|               |  | <b>01</b>                            | 4-pole<br><b>32</b> | <b>96</b> | 5-pole<br><b>35</b> |
|               |  |                                      |                     |           |                     |
| Output signal | <p>shield</p> <p>U<sub>S</sub> (pos. Supply) →</p> <p>U<sub>S</sub> (neg. Supply) →</p> <p>earth/housing →</p> <p><b>8253.XX.XXXX.XX.19</b></p>                                | 2                                    | 1                   | -         | 4                   |
|               | <p>shield</p> <p>U<sub>S</sub> (pos. Supply) →</p> <p>Out (Output) →</p> <p>U<sub>S</sub> (neg. Supply) →</p> <p>earth/housing →</p> <p><b>8253.XX.XXXX.XX.14/16/17/23</b></p> | 1                                    | 1                   | 1         | 2                   |
|               |  | 1                                    | 3                   | -         | 1                   |
|               |  | ⊖                                    | 4                   | -         | 5                   |
|               |  |                                      | 4                   | 3         | 3                   |
|               |  |                                      | ⊖                   | 2         | 5                   |

\*) Provided female connector is mounted according to instructions

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72300">www.trafag.com/H72300</a> |
| Instructions | <a href="http://www.trafag.com/H73250">www.trafag.com/H73250</a> |
| Flyer        | <a href="http://www.trafag.com/H70670">www.trafag.com/H70670</a> |

# HYDRAULIC PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The hydraulic pressure transmitter NAH 8254 with increased accuracy of 0.3% and optional switching outputs has an exceptionally long-term stable thin-film-on-steel sensor cell with triple (optionally 5-fold) overpressure protection. The robust design and the wide temperature range of -40°C to +125°C make the NAH 8254 the ideal solution when pressure needs to be measured accurately and reliably under rough environmental conditions.



## Applications

- Machine tools
- Hydraulics
- HVAC
- Refrigeration
- Process technology
- Water treatment

## Features

- Measuring accuracy 0.3 %
- Completely welded steel sensor system without additional seals
- Excellent long-term stability
- Optional: 5-fold overpressure resistance
- Optional: Switching output 1 or 2 PNP transistors

| Technical Data      |   |                      |   |
|---------------------|---|----------------------|---|
| Measuring principle | Thin film on steel  | Accuracy @ 25°C typ. | ± 0.3 % FS typ.   |
| Measuring range     | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi  | Media temperature    | -40°C ... +125°C  |
| Output signal       | 4 ... 20 mA, 0.5 ... 4.5 VDC, 0 ... 5 VDC,<br>1 ... 5 VDC, 1 ... 6 VDC, 0 ... 10 VDC,<br>0.1 ... 10.1 VDC,<br>0.5 ... 4.5 VDC ratiometric,<br>Switching output:<br>1 or 2 PNP transistors | Ambient temperature  | -40°C ... +125°C<br>(Cable PVC 22: -5°C ... +60°C)<br>(Cable PUR 24: -40°C ... +70°C) |

Subject to change

## Ordering information/type code

|                                      |   |                                    |                             | 8254 . XX                               | XX                         | XX                          | XX    | XX | XX |
|--------------------------------------|---|------------------------------------|-----------------------------|---|----------------------------|-----------------------------|-------|----|----|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range [bar]</b>                                     | <b>Over pressure [bar]</b>         | <b>Burst pressure [bar]</b> | <b>Pressure measurement range [psi]</b> | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |       |    |    |
|                                      | 0 ... 2.5   | 7.5                                | 50                          | 75                                      | 0 ... 30                   | 90                          | 700   | G5 |    |
|                                      | 0 ... 4   | 12                                 | 60                          | 76                                      | 0 ... 50                   | 150                         | 850   | G6 |    |
|                                      | 0 ... 6   | 18                                 | 100                         | 77                                      | 0 ... 100                  | 300                         | 1450  | G7 |    |
|                                      | 0 ... 10  | 30                                 | 200                         | 78                                      | 0 ... 150                  | 450                         | 2500  | G8 |    |
|                                      | 0 ... 16  | 48                                 | 200                         | 79                                      | 0 ... 200                  | 600                         | 2500  | GA |    |
|                                      | 0 ... 25 <sup>8)</sup>  | 75                                 | 300                         | 80                                      | 0 ... 250                  | 750                         | 2500  | G9 |    |
|                                      | 0 ... 40 <sup>8)</sup>  | 120                                | 300                         | 81                                      | 0 ... 300 <sup>8)</sup>    | 900                         | 4000  | HA |    |
|                                      | 0 ... 60 <sup>8)</sup>  | 180                                | 400                         | 82                                      | 0 ... 400 <sup>8)</sup>    | 1200                        | 4000  | HO |    |
|                                      | 0 ... 100 <sup>8)</sup>   | 300                                | 500                         | 83                                      | 0 ... 500                  | 1500                        | 4000  | H1 |    |
|                                      | 0 ... 160 <sup>8)</sup>   | 480                                | 750                         | 85                                      | 0 ... 1000 <sup>8)</sup>   | 3000                        | 5000  | H2 |    |
|                                      | 0 ... 250   | 750                                | 1000                        | 74                                      | 0 ... 1500 <sup>8)</sup>   | 4500                        | 7000  | H3 |    |
|                                      | 0 ... 400   | 1000                               | 2000                        | 84                                      | 0 ... 2000 <sup>8)</sup>   | 6000                        | 10000 | H5 |    |
|                                      | 0 ... 600   | 1500                               | 2500                        | 86                                      | 0 ... 3000                 | 9000                        | 14500 | G4 |    |
|                                      | <b>Option 5P:</b>   | <b>Fivefold overpressure</b>       |                             |   | 0 ... 5000                 | 12500                       | 21750 | H4 |    |
|                                      | 0 ... 2.5   | 12.5                               | 60                          | 55                                      | 0 ... 7500                 | 18750                       | 29000 | H6 |    |
|                                      | 0 ... 4   | 20                                 | 100                         | 56                                      |                            |                             |       |    |    |
|                                      | 0 ... 6   | 30                                 | 200                         | 57                                      |                            |                             |       |    |    |
|                                      | 0 ... 10  | 50                                 | 200                         | 58                                      |                            |                             |       |    |    |
|                                      | 0 ... 16  | 80                                 | 300                         | 59                                      |                            |                             |       |    |    |
|                                      | 0 ... 25  | 125                                | 300                         | 60                                      |                            |                             |       |    |    |
|                                      | 0 ... 40  | 200                                | 400                         | 61                                      |                            |                             |       |    |    |
|                                      | 0 ... 60  | 300                                | 500                         | 62                                      |                            |                             |       |    |    |
|                                      | 0 ... 100   | 500                                | 750                         | 63                                      |                            |                             |       |    |    |
|                                      | 0 ... 160   | 800                                | 1000                        | 65                                      |                            |                             |       |    |    |
|                                      | <b>Sensor</b>   | Relative pressure, accuracy: 0.3 % |                             |   |                            |                             |       |    | 23 |
| <b>Pressure connection</b>           | G1/4" male, seal: DIN 3869 (accessory 61/63/83)                             |                                    |                             |   |                            |                             |       | 17 |    |
|                                      | G1/4" male (Manometer) EN 871 <sup>8)</sup>                                 |                                    |                             |   |                            |                             |       | 53 |    |
|                                      | 1/4" NPT male   |                                    |                             |   |                            |                             |       | 30 |    |
|                                      | 1/8" NPT male <sup>5) 9)</sup>  |                                    |                             |   |                            |                             |       | 43 |    |
|                                      | 7/16"-20UNF female SAE J512 with valve opener <sup>4)</sup>                 |                                    |                             |   |                            |                             |       | 24 |    |
|                                      | 7/16"-20UNF female SAE J512 without valve opener <sup>4)</sup>              |                                    |                             |   |                            |                             |       | 44 |    |
|                                      | 7/16"-20UNF male, DIN3866 <sup>4)</sup>                                     |                                    |                             |   |                            |                             |       | 18 |    |
|                                      | 7/16"-20UNF SAE4 male, seal: accessory 61 <sup>7)</sup>                     |                                    |                             |   |                            |                             |       | 42 |    |
|                                      | R1/4" male, DIN3858 <sup>5)</sup>   |                                    |                             |   |                            |                             |       | 19 |    |
|                                      | R1/4" male, DIN2999 <sup>5) 9)</sup>  |                                    |                             |   |                            |                             |       | 20 |    |
|                                      | R1/8" male, DIN3858 <sup>5)</sup>   |                                    |                             |   |                            |                             |       | 16 |    |
|                                      | M10x1 male, DIN EN ISO 6149-2   |                                    |                             |   |                            |                             |       | 32 |    |
|                                      | M12x1.5 male, DIN EN ISO 9974-2 <sup>8)</sup>                               |                                    |                             |   |                            |                             |       | 49 |    |
| <b>Electrical connection</b>         | Male electrical plug, industrial standard, contact distance 9.4 mm, Mat. PA |                                    |                             |   |                            |                             |       | 01 |    |
|                                      | Male electrical plug M12x1, 4-pole, Mat. PA                                 |                                    |                             |   |                            |                             |       | 32 |    |
|                                      | Male electrical plug M12x1, 5-pole, Mat. PA                                 |                                    |                             |   |                            |                             |       | 35 |    |
|                                      | Male electrical plug: MIL-C 26482, 6-pole, metal                            |                                    |                             |   |                            |                             |       | 02 |    |
|                                      | Cable IP67, Mat. PVC <sup>7)</sup>  |                                    |                             |   |                            |                             |       | 22 |    |
|                                      | Cable IP67, Mat. PUR <sup>7)</sup>  |                                    |                             |   |                            |                             |       | 24 |    |
|                                      | Cable IP67, Mat. EPD Raychem FDR25 <sup>7)</sup>                            |                                    |                             |   |                            |                             |       | 08 |    |

| Output signal      | Signal output   | Load resistance | I (supply) | U (supply)            |    |
|--------------------|---|-----------------|------------|-----------------------|----|
|                    | 4 ... 20 mA   | See graphic     |            | 24 (9 ... 32) VDC     | 19 |
|                    | 0.5 ... 4.5 VDC   | ≥ 5.0 kΩ to Us- | ≤ 20 mA    | 24 (9 ... 32) VDC     | 20 |
|                    | 0 ... 5 VDC   | ≥ 5.0 kΩ to Us- | ≤ 20 mA    | 24 (9 ... 32) VDC     | 14 |
|                    | 1 ... 5 VDC   | ≥ 5.0 kΩ to Us- | ≤ 20 mA    | 24 (9 ... 32) VDC     | 25 |
|                    | 1 ... 6 VDC   | ≥ 5.0 kΩ to Us- | ≤ 20 mA    | 24 (9 ... 32) VDC     | 16 |
|                    | 0 ... 10 VDC  | ≥ 5.0 kΩ to Us- | ≤ 15 mA    | 24 (15 ... 32) VDC    | 17 |
|                    | 0.1 ... 10.1 VDC  | ≥ 5.0 kΩ to Us- | ≤ 15 mA    | 24 (15 ... 32) VDC    | 13 |
|                    | 0.5 ... 4.5 VDC ratiom.   | ≥ 5.0 kΩ to Us- | ≤ 10 mA    | 5 (4.75 ... 5.25) VDC | 23 |
|                    | 2 PNP transistors <sup>3)</sup>   |                 | ≤ 10 mA    | 24 (9 ... 32) VDC     | PS |
|                    | 1 PNP transistor <sup>3)</sup>  |                 | ≤ 10 mA    | 24 (9 ... 32) VDC     | T1 |
| <b>Accessories</b> | Female electrical plug M12x1, 5-pole <sup>2)</sup>  |                 |            |                       | 33 |
|                    | Female electrical connector industrial standard (for electrical connection 01)  |                 |            |                       | 34 |
|                    | Pressure peak damping element ø 1.0 mm <sup>4)</sup>  |                 |            |                       | 40 |
|                    | Pressure peak damping element ø 0.4 mm <sup>4)</sup>  |                 |            |                       | 44 |
|                    | Seal FPM, -18°C ... +125°C  |                 |            |                       | 61 |
|                    | Seal EPDM, -40°C ... +125°C   |                 |            |                       | 63 |
|                    | Seal NBR, -25°C ... +100°C  |                 |            |                       | 83 |
|                    | Special electrical connection: Pin 2 +, Pin 3 ground, Pin 4 -<br>(only for output signal 19 and male electrical plug 01, industrial standard)                                     |                 |            |                       | 90 |
|                    | Special electrical connection: Pin 1 out, Pin 2 +, Pin 3 ground, Pin 4 -<br>(only for output signals 14, 16, 17, 23 and male electrical plug 01, industrial standard)             |                 |            |                       | 91 |
|                    | Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 3 Out, Pin 4 -<br>(only for output signals 13, 14, 16, 17, 20, 23, 25 and male electrical plug 32, M12x1, 4-pole)       |                 |            |                       | 95 |
|                    | Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 3 -, Pin 4 Out<br>(only for output signals 14, 16, 17, 23 and male electrical plug 32, M12x1, 4-pole)                   |                 |            |                       | 96 |
|                    | Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 ground<br>(only for output signal 19 and male electrical plug 01, industrial standard)                                     |                 |            |                       | 92 |
|                    | Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 ground<br>(only for output signal 19 and male electrical plug 32, M12x1, 4-pole)   |                 |            |                       | E1 |
|                    | Special electrical connection: Pin 1 +, Pin 2 -, Pin 3 out, Pin 4 ground<br>(only for output signals 14, 16, 17, 23 and male electrical plug 32, M12x1, 4-pole)                   |                 |            |                       | E2 |
|                    | Special electrical connection: Pin 1 Out, Pin 2 -, Pin 3 +, Pin 4 ground<br>(only for output signals 13, 14, 16, 17, 20, 23, 25 and male electrical plug 01, industrial standard) |                 |            |                       | E3 |
|                    | Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 4 -<br>(only for output signal 19 and male electrical plug 32, M12x1, 4-pole)   |                 |            |                       | E6 |
|                    | Cable length 0.5 m  |                 |            |                       | EM |
|                    | Cable length 1.0 m  |                 |            |                       | 1M |
|                    | Cable length 2.0 m  |                 |            |                       | 2M |
|                    | Parameterisation according to customer specification for output signal PS, T1 (see table parameter)   |                 |            |                       | ZC |
|                    | Signal processing, cut-off frequency (see table Signal processing)  |                 |            |                       |    |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> For electrical connections 32 and 35

<sup>3)</sup> Only with electrical connections 32, 22, 24, 08

<sup>4)</sup> Max. allowable pressure range 60 bar at 120 bar overpressure

<sup>5)</sup> Max. allowable pressure range 160 bar at 500 bar overpressure

<sup>6)</sup> Only for pressure connections 17, 30, 32

<sup>7)</sup> Cable length see accessories

<sup>8)</sup> According to norm J1926, max. 35 MPa

<sup>9)</sup> Upon request

<sup>10)</sup> Only with electrical connections 32, 35 with shielded cable and 22, 24, 08

| Signal processing, 4 ... 20 mA, 0.5 ... 4.5 VDC ratiometric |                         |  |
|---|-------------------------|--|
| Code  | Cut-off frequency $f_G$ | Rise time (10 ... 90 % nominal pressure) |
| GA <sup>9)</sup>  | 11 Hz                   | 32 ms                                    |
| GU <sup>9) 10)</sup>  | 20 kHz                  | 18 μs                                    |

## Standard products (extra short lead time)

| Product No. | Type Code                             | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|---------------------------------------|----------------------|--------------------------|--------------|--------------------------|
| NAH2.5A     | 8254 75 2317 32 0000 0000 19 33 44 61 | 0 ... 2.5            | 7.5                      | 9 ... 32     | ± 0.3                    |
| NAH4.0A     | 8254 76 2317 32 0000 0000 19 33 44 61 | 0 ... 4              | 12                       | 9 ... 32     | ± 0.3                    |
| NAH6.0A     | 8254 77 2317 32 0000 0000 19 33 44 61 | 0 ... 6              | 18                       | 9 ... 32     | ± 0.3                    |
| NAH10.0A    | 8254 78 2317 32 0000 0000 19 33 44 61 | 0 ... 10             | 30                       | 9 ... 32     | ± 0.3                    |
| NAH16.0A    | 8254 79 2317 32 0000 0000 19 33 44 61 | 0 ... 16             | 48                       | 9 ... 32     | ± 0.3                    |
| NAH25.0A    | 8254 80 2317 32 0000 0000 19 33 44 61 | 0 ... 25             | 75                       | 9 ... 32     | ± 0.3                    |
| NAH40.0A    | 8254 81 2317 32 0000 0000 19 33 44 61 | 0 ... 40             | 120                      | 9 ... 32     | ± 0.3                    |
| NAH100.0A   | 8254 83 2317 32 0000 0000 19 33 44 61 | 0 ... 100            | 300                      | 9 ... 32     | ± 0.3                    |
| NAH250.0A   | 8254 74 2317 32 0000 0000 19 33 44 61 | 0 ... 250            | 750                      | 9 ... 32     | ± 0.3                    |
| NAH400.0A   | 8254 84 2317 32 0000 0000 19 33 44 61 | 0 ... 400            | 1000                     | 9 ... 32     | ± 0.3                    |
| NAH600.0A   | 8254 86 2317 32 0000 0000 19 33 44 61 | 0 ... 600            | 1500                     | 9 ... 32     | ± 0.3                    |

| Parameter  |                                 |  |            |                                    |
|--|---------------------------------|--|------------|------------------------------------|
| Name   | Standard setting (accessory ZS) | Value range  | Short name | Customer adjustment (accessory ZC) |
| Switch point SP1 (hysteresis mode)<br>Upper switch point FH1 (window mode)                             | 75 % Measuring range            | > RP1, FL1<br>Hysteresis $\geq$ 1 % FS   | SP1        |                                    |
| Reset point RP1 (hysteresis mode)<br>Lower switch point FL1 (window mode)                              | 25 % Measuring range            | < SP1, FH1<br>Hysteresis $\geq$ 1 % FS   | RP1        |                                    |
| Switch point SP2 (hysteresis mode)<br>Upper switch point FH2 (window mode)                             | 75 % Measuring range            | > RP2, FL2<br>Hysteresis $\geq$ 1 % FS   | SP2        |                                    |
| Reset point RP2 (hysteresis mode)<br>Lower switch point FL2 (window mode)                              | 25 % Measuring range            | < SP2, FH2<br>Hysteresis $\geq$ 1 % FS   | RP2        |                                    |
| Switch point delay time SP1 / RP1 (hysteresis mode)<br>Switch point delay time FH1 / FL1 (window mode) | 0                               | 0; 2 <sup>x</sup> [ms], x = 3, 4 ... 16  | dS1        |                                    |
| Switch point delay time SP2 / RP2 (hysteresis mode)<br>Switch point delay time FH2 / FL2 (window mode) | 0                               | 0; 2 <sup>x</sup> [ms], x = 3, 4 ... 16  | dS2        |                                    |
| Functions switching output 1   | Hysteresis, closer (Hno)        | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno),<br>Window NC (Fnc)                 | ou1        |                                    |
| Functions switching output 2   | Hysteresis, closer (Hno)        | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno),<br>Window NC (Fnc)<br>Device ready | ou2        |                                    |

### Parameterization of switching points

The switching points, delay times and output functions can be parameterized via Smartphone app (Android). The SMI Sensor Master Interface required for the parameterization as well as the Smartphone are not part of the delivery. The Android App is available for free in the Google Play Store.

- Ordering No. SMI Sensor Master Interface: F90170 (available from the 2nd quarter of 2018)
- Data sheet SMI Sensor Master Interface: H72618





| Specifications                  |  |   |
|---------------------------------|--|---|
| <b>Electrical Data</b>          | Output / supply voltage  | 4 ... 20 mA: 24 (9...32) VDC<br>0.5 ... 4.5 VDC: 24 (9...32) VDC<br>0 ... 5 VDC: 24 (9...32) VDC<br>1 ... 5 VDC: 24 (9...32) VDC<br>1 ... 6 VDC: 24 (9...32) VDC<br>0 ... 10 VDC: 24 (15...32) VDC<br>0.1 ... 10.1 VDC: 24 (15...32) VDC<br>0.5 ... 4.5 VDC ratiom.,<br>10 ... 90% $U_{supply}$ : $5 \pm 0.25$ VDC<br>1 or 2 PNP transistors: 24 (9...32) VDC |
|                                 | Switch-on-delay pressure transmitters                                    | 100 ms  |
|                                 | Switch-on-delay pressure switches  | 50 ms + switching delay time  |
|                                 | Inverse-polarity protection, short-circuit strength @ 25°C during 5 min. | 4...20 mA: to $U_s = 32$ VDC<br>0.5...4.5 VDC, 0...5 VDC, 1...5 VDC, 1...6 VDC,<br>0...10 VDC, 0.1...10.1 VDC: to $U_s = 28$ VDC<br>0.5...4.5 VDC ratiometric: to $U_s = 14$ VDC<br>1 or 2 PNP transistors: to $U_s = 32$ VDC   |
| <b>Environmental conditions</b> | Media temperature  | -40°C ... +125°C  |
|                                 | Ambient temperature  | -40°C ... +125°C<br>(Cable PVC 22: -5°C ... +60°C)<br>(Cable PUR 24: -40°C ... +70°C)   |
|                                 | Protection <sup>1)</sup>   | IP65, IP67  |
|                                 | Humidity   | Max. 95 % relative  |
|                                 | Vibration  | 15 g RMS (20...2000 Hz) (EN60068-2-64)<br>25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C)<br>(EN60068-2-6)   |
|                                 | Shock  | 50 g / 11 ms<br>100 g / 6 ms Male electrical plug M12x1<br>(EN60068-2-27) <sup>2)</sup>   |
| <b>EMC Protection</b>           | Emission   | EN/IEC 61000-6-3  |
|                                 | Immunity   | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)  | 1.4542 (AISI630)  |
|                                 | Pressure connection (wetted parts)                                       | 1.4542 (AISI630)  |
|                                 | Housing  | 1.4301 (AISI304)  |
|                                 | Sealing  | FPM/EPDM/NBR  |
|                                 | Male electrical plug   | See ordering information  |
|                                 | Weight   | appr. 50 g  |
|                                 | Mounting torque  | 25 Nm   |

<sup>1)</sup> See electrical connection

<sup>2)</sup> For electrical connections 32 and 35


## Analogue output

|           |  |               |        |
|-----------|--|---------------|--------|
| Accuracy  | TEB @ -25 ... +85°C                      | [% FS typ.]   | ± 1.0  |
|           | Accuracy @ +25°C                         | [% FS typ.]   | ± 0.3  |
|           | NLH @ +25°C (BSL)                        | [% FS typ.]   | ± 0.2  |
|           | TC zero point and span                   | [% FS/K typ.] | ± 0.01 |
|           | Long term stability 1 year               | [% FS typ.]   | ± 0.1  |
| Rise time | Typ. 1 ms / 10 ... 90 % nominal pressure |               |        |


## Switching output

|                                  |  |                                 |   |
|----------------------------------|--|---------------------------------|---|
| Accuracy                         | TEB @ -25 ... +85°C  | [% FS typ.]                     | ± 1.0                                     |
|                                  | Accuracy @ +25°C   | [% FS typ.]                     | ± 0.3                                     |
|                                  | Long term stability 1 year                                   | [% FS typ.]                     | ± 0.1                                     |
| Adjustment range of switchpoints | 1 ... 99 % FS  |                                 |   |
| Distance switch point            | ≥ 1.0 % FS   |                                 |   |
| Switch point > reset point       | Switchpoint > reset point                                    |                                 |   |
| Switching resistance             | ≤ 3 Ω  |                                 |   |
| Output function                  | Hysteresis, Window; normally closed (NO), normally open (NC) |                                 |   |
| Switching current                | -40°C ... +85°C  | (Ambient and media temperature) | ≤ 400 mA, total of both switching outputs |
|                                  | +85°C ... +125°C   | (Ambient and media temperature) | ≤ 200 mA, total of both switching outputs |
| Current limiting                 | integrated   |                                 |   |
| Delay time                       | 0; 2*[ms], x = 3, 4 ... 16                                   |                                 |   |
| Switching frequency              | max. 60 Hz (at switching delay time = 0)                     |                                 |   |


## Measuring accuracy

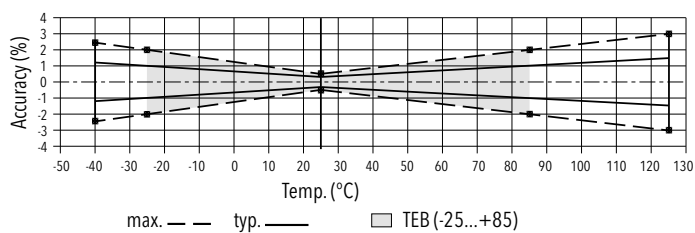


## Dimensions

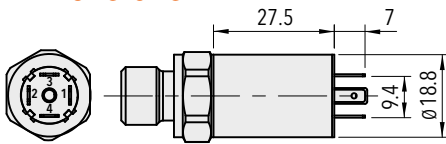


8254.XX.XXXX.01.XX.XX

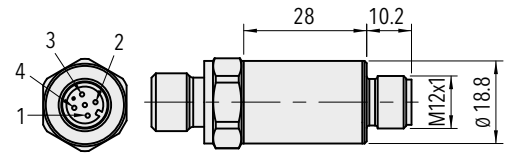


8254.XX.XXXX.32.XX.XX

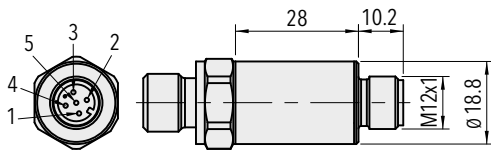


8254.XX.XXXX.35.XX.XX

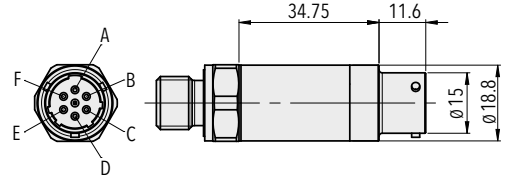


8254.XX.XXXX.02.XX.XX

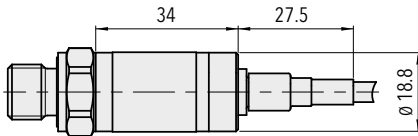


8254.XX.XXXX.22/24/08.XX.XX




8254.XX.XX17.XX.XX.XX




8254.XX.XX53.XX.XX.XX




8254.XX.XX30.XX.XX.XX




8254.XX.XX43.XX.XX.XX




8254.XX.XX24.XX.XX.XX




8254.XX.XX44.XX.XX.XX




8254.XX.XX18.XX.XX.XX




8254.XX.XX42.XX.XX.XX




8254.XX.XX19.XX.XX.XX




8254.XX.XX20.XX.XX.XX




8254.XX.XX16.XX.XX.XX




8254.XX.XX32.XX.XX.XX



8254.XX.XX49.XX.XX.XX



8254.XX.XXXX.XX.XX.33



8254.XX.XXXX.XX.XX.34

## Electrical connection



|               |  | Protection / electrical connection             |           |            |   |           |           |             |   |                 |                |
|---------------|--|--|-----------|------------|---|-----------|-----------|-------------|---|-----------------|----------------|
|               |  | IP65 *)**)                                     |           | IP67 *)**) |   |           |           | IP67*)**)   |   | IP67**)         |                |
|               |  | Industrial standard<br>Contact distance 9.4 mm |           | M12x1      |   |           |           | MIL-C 26482 |   | Cable           |                |
|               |  | <b>01</b>                                      |           | <b>32</b>  |   | <b>35</b> |           | <b>02</b>   |   | <b>22/24</b>    |                |
|               |  |  |           |            |   |           |           |             |   |                 |                |
| Output signal | <p><b>8254.xx.XXXX.XX.19</b></p>                 |  | <b>90</b> | <b>92</b>  |   | <b>E1</b> | <b>E6</b> |             |   |                 |                |
|               | <p><b>8254.xx.XXXXX.13/14/16/17/20/23/25</b></p> |  | <b>91</b> | <b>E3</b>  |   | <b>95</b> | <b>96</b> | <b>E2</b>   |   |                 |                |
|               |  | 2  | 2         | 1          | 1 | 1         | 1         | 4           | A | white           | red            |
|               |  | 1  | 4         | 2          | 3 | 2         | 4         | 1           | B | brown<br>yellow | black<br>green |
|               |  | 4  | 3         | 4          | 4 | 4         | 2         | 5           | E |                 |                |
|               |  | 1  | 2         | 3          | 1 | 1         | 1         | 2           |   | white<br>green  | red<br>white   |
|               |  | 2  | 1         | 1          | 2 | 3         | 4         | 3           |   | brown<br>yellow | black<br>green |
|               |  | 3  | 4         | 2          | 3 | 4         | 3         | 2           |   |                 |                |
|               |  | 4  | 3         | 4          | 4 | 2         | 2         | 4           |   |                 |                |

|               |                                     | Protection / electrical connection |           |                 |                |                                |                            |
|---------------|-------------------------------------|------------------------------------|-----------|-----------------|----------------|--------------------------------|----------------------------|
|               |                                     | IP67 *)**)                         |           | IP67**)         |                | IP67**)                        |                            |
|               |                                     | M12x1<br>4-pole                    |           | Cable           |                | Cable                          |                            |
|               |                                     | <b>32</b>                          |           | <b>22/24</b>    |                | <b>08</b>                      |                            |
|               |                                     |                                    |           |                 |                |                                |                            |
| Output signal | <p><b>8254.xx.XXXX.XX.PS/T1</b></p> | <b>PS</b>                          | <b>T1</b> | <b>PS</b>       | <b>T1</b>      | <b>PS</b>                      | <b>T1</b>                  |
|               |                                     | 1                                  | 1         | white<br>green  | white<br>green | red<br>white<br>green<br>black | red<br>white<br>-<br>black |
|               |                                     | 4                                  | 4         | yellow<br>brown | -<br>brown     |                                |                            |
|               |                                     | 2                                  | -         |                 |                |                                |                            |
|               |                                     | 3                                  | 3         |                 |                |                                |                            |

\*) Nur mit vorschriftsmässig montierter Kabeldose gültig


\*\*) Entlüftung über Stecker/Kabel

4...20mA: min./max resistor vs. supply voltage @ Pmax = 100%

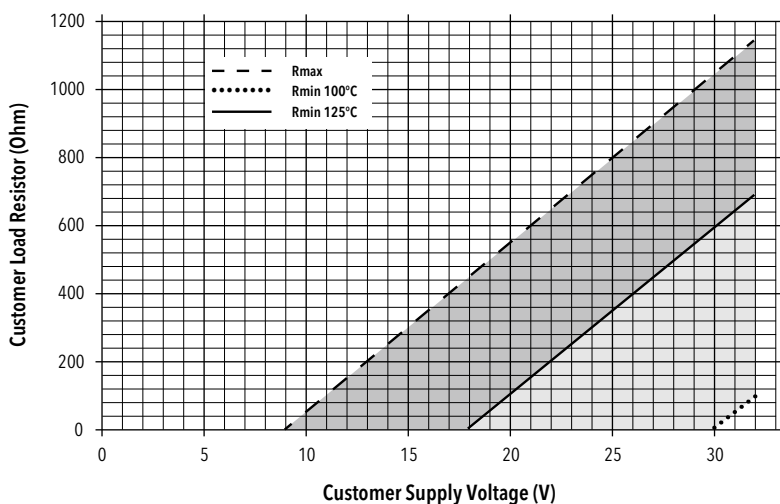

Connection of loads to switch contacts

## Functions switching output

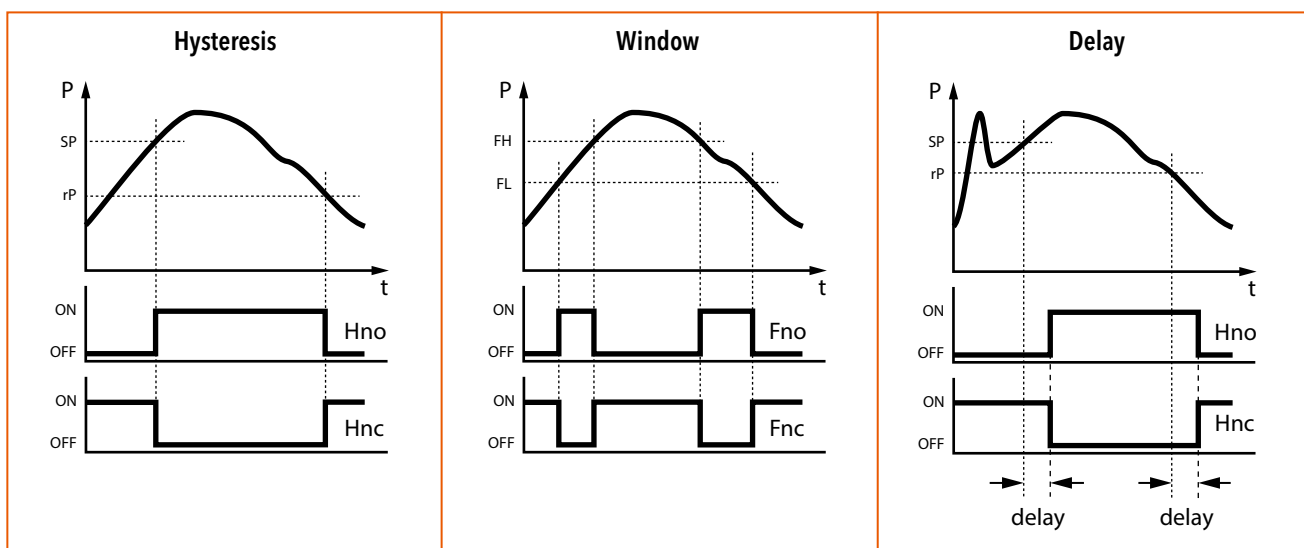

### Additional information

#### Documents

Data sheet

[www.trafag.com/H72304](http://www.trafag.com/H72304)

Instructions

[www.trafag.com/H73303](http://www.trafag.com/H73303)

Flyer

[www.trafag.com/H70682](http://www.trafag.com/H70682)

# ENGINE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The engine and shipbuilding pressure transmitter NAE 8256 features the extremely robust and stable thin-film-on-steel sensor element. The NAE 8256 is the smallest pressure transmitter of its kind with ship approvals. The wide temperature range from -40°C up to +125°C and triple overpressure safety makes it the first choice in rough environments such as marine applications.



## Applications

- Shipbuilding
- Engine manufacturing
- Hydraulics


## Features

- Measuring accuracy 0.3 %, 0.5 %
- Completely welded steel sensor system without additional seals
- Smallest design
- High resistance to over pressure
- Excellent long-term stability

| Technical Data       |   |                       |  |
|----------------------|---|-----------------------|--|
| Measuring principle  | Thin film on steel                                      | Media temperature     | -40°C ... +125°C                           |
| Measuring range      | 0 ... 6 to 0 ... 600 bar<br>0 ... 100 to 0 ... 7500 psi | Ambient temperature   | -40°C ... +125°C                           |
| Output signal        | 4 ... 20 mA   | Approval / conformity | ABS, BV, DNV-GL, KRS, LRS, NKK, RINA, RMRS |
| Accuracy @ 25°C typ. | 0.5 %: ± 0.5 % FS typ.<br>0.3 %: ± 0.3 % FS typ.        |                       |  |

Subject to change

## Ordering information/type code

|                                      |  |                            |                             |           |   |                            | 8256 . XX                   | XX        | XX | XX | XX | XX        |
|--------------------------------------|--|----------------------------|-----------------------------|-----------|---|----------------------------|-----------------------------|-----------|----|----|----|-----------|
| <b>Measuring range</b> <sup>1)</sup> | <b>Pressure measurement range [bar]</b>  | <b>Over pressure [bar]</b> | <b>Burst pressure [bar]</b> |           | <b>Pressure measurement range [psi]</b> | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |           |    |    |    |           |
|                                      | 0 ... 6 <sup>5) 6)</sup>   | 18                         | 100                         | <b>77</b> | 0 ... 100 <sup>5) 6)</sup>              | 300                        | 1450                        | <b>G7</b> |    |    |    |           |
|                                      | 0 ... 10   | 30                         | 200                         | <b>78</b> | 0 ... 150                               | 450                        | 2500                        | <b>G8</b> |    |    |    |           |
|                                      | 0 ... 16   | 48                         | 200                         | <b>79</b> | 0 ... 200                               | 600                        | 2500                        | <b>GA</b> |    |    |    |           |
|                                      | 0 ... 25   | 75                         | 300                         | <b>80</b> | 0 ... 250                               | 750                        | 2500                        | <b>G9</b> |    |    |    |           |
|                                      | 0 ... 40   | 120                        | 300                         | <b>81</b> | 0 ... 300                               | 900                        | 4000                        | <b>HA</b> |    |    |    |           |
|                                      | 0 ... 60   | 180                        | 400                         | <b>82</b> | 0 ... 400                               | 1200                       | 4000                        | <b>H0</b> |    |    |    |           |
|                                      | 0 ... 100  | 300                        | 500                         | <b>83</b> | 0 ... 500                               | 1200                       | 4000                        | <b>H1</b> |    |    |    |           |
|                                      | 0 ... 160  | 480                        | 750                         | <b>85</b> | 0 ... 1000                              | 3000                       | 5000                        | <b>H2</b> |    |    |    |           |
|                                      | 0 ... 250  | 750                        | 1000                        | <b>74</b> | 0 ... 1500                              | 4500                       | 7000                        | <b>H3</b> |    |    |    |           |
|                                      | 0 ... 400  | 1000                       | 2000                        | <b>84</b> | 0 ... 2000                              | 6000                       | 10000                       | <b>H5</b> |    |    |    |           |
|                                      | 0 ... 600  | 1500                       | 2500                        | <b>86</b> | 0 ... 3000                              | 9000                       | 14500                       | <b>G4</b> |    |    |    |           |
|                                      |  |                            |                             |           | 0 ... 5000                              | 12500                      | 21750                       | <b>H4</b> |    |    |    |           |
|                                      |  |                            |                             |           | 0 ... 7500                              | 18750                      | 29000                       | <b>H6</b> |    |    |    |           |
| <b>Sensor</b>                        | Relative pressure, accuracy: 0.5 %   |                            |                             |           |   |                            |                             |           |    |    |    | <b>25</b> |
|                                      | Relative pressure, accuracy: 0.3 %   |                            |                             |           |   |                            |                             |           |    |    |    |           |
| <b>Pressure connection</b>           | G1/4" male, seal: DIN 3869 (accessories 61/63/83)  |                            |                             |           |   |                            |                             |           |    |    |    | <b>17</b> |
|                                      | G1/4" male (Manometer) EN 871 <sup>6)</sup>  |                            |                             |           |   |                            |                             |           |    |    |    | <b>53</b> |
|                                      | 1/4" NPT male  |                            |                             |           |   |                            |                             |           |    |    |    | <b>30</b> |
|                                      | M10x1 male   |                            |                             |           |   |                            |                             |           |    |    |    | <b>32</b> |
| <b>Electrical connection</b>         | Male electrical plug, industrial standard, contact distance 9.4 mm, Mat. PA  |                            |                             |           |   |                            |                             |           |    |    |    | <b>01</b> |
|                                      | Male electrical plug M12x1, 4-pole, Mat. PA  |                            |                             |           |   |                            |                             |           |    |    |    | <b>32</b> |
|                                      | Male electrical plug M12x1, 5-pole, Mat. PA  |                            |                             |           |   |                            |                             |           |    |    |    | <b>35</b> |
| <b>Output signal</b>                 | <b>Signal output</b>   | <b>Load resistance</b>     | <b>I (supply)</b>           |           | <b>U (supply)</b>                       |                            |                             |           |    |    |    |           |
|                                      | 4 ... 20 mA                                       | See graphic                |                             |           | 24 (9 ... 32) VDC                       |                            |                             |           |    |    |    | <b>19</b> |
| <b>Accessories</b>                   | Female electrical plug M12x1, 5-pole <sup>2)</sup>   |                            |                             |           |   |                            |                             |           |    |    |    | <b>33</b> |
|                                      | Female electrical connector industrial standard <sup>3)</sup>  |                            |                             |           |   |                            |                             |           |    |    |    | <b>34</b> |
|                                      | Pressure peak damping element ø 0.4 mm   |                            |                             |           |   |                            |                             |           |    |    |    | <b>44</b> |
|                                      | Seal FPM, -18°C ... +125°C <sup>4)</sup>   |                            |                             |           |   |                            |                             |           |    |    |    | <b>61</b> |
|                                      | Seal EPDM, -40°C ... +125°C <sup>4)</sup>  |                            |                             |           |   |                            |                             |           |    |    |    | <b>63</b> |
|                                      | Seal NBR, -25°C ... +100°C <sup>4)</sup>   |                            |                             |           |   |                            |                             |           |    |    |    | <b>83</b> |
|                                      | Special electrical connection: Pin 2 +, Pin 3 ground, Pin 4 - (only for male electrical plug 01, industrial standard)                |                            |                             |           |   |                            |                             |           |    |    |    | <b>90</b> |
|                                      | Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 ground (only for output signal 19 and male electrical plug 32, M12x1, 4-pole) |                            |                             |           |   |                            |                             |           |    |    |    | <b>E1</b> |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> For electrical connections 32 and 35

<sup>3)</sup> For electrical connection 01

<sup>4)</sup> Only with pressure connection 17 (G1/4")

<sup>5)</sup> Only with sensor 23 (accuracy 0.3 %)

<sup>6)</sup> Only with ship approval DNV-GL

## Standard products (extra short lead time)


| Product No. | Type Code                             | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|---------------------------------------|----------------------|--------------------------|--------------|--------------------------|
| NAE10.0A    | 8256 78 2317 32 0000 0000 19 33 44 61 | 0 ... 10             | 30                       | 9 ... 32     | ± 0.3                    |
| NAE16.0A    | 8256 79 2317 32 0000 0000 19 33 44 61 | 0 ... 16             | 48                       | 9 ... 32     | ± 0.3                    |
| NAE25.0A    | 8256 80 2317 32 0000 0000 19 33 44 61 | 0 ... 25             | 75                       | 9 ... 32     | ± 0.3                    |
| NAE40.0A    | 8256 81 2317 32 0000 0000 19 33 44 61 | 0 ... 40             | 120                      | 9 ... 32     | ± 0.3                    |
| NAE100.0A   | 8256 83 2317 32 0000 0000 19 33 44 61 | 0 ... 100            | 300                      | 9 ... 32     | ± 0.3                    |
| NAE250.0A   | 8256 74 2317 32 0000 0000 19 33 44 61 | 0 ... 250            | 750                      | 9 ... 32     | ± 0.3                    |
| NAE400.0A   | 8256 84 2317 32 0000 0000 19 33 44 61 | 0 ... 400            | 1000                     | 9 ... 32     | ± 0.3                    |
| NAE600.0A   | 8256 86 2317 32 0000 0000 19 33 44 61 | 0 ... 600            | 1500                     | 9 ... 32     | ± 0.3                    |




| Specifications                  |  |   |
|---------------------------------|--|---|
| <b>Accuracy</b>                 | TEB typ. @ -25 ... +85°C   | 0.5 %: ± 1.75 % FS typ.<br>0.3 %: ± 1.0 % FS typ.                           |
|                                 | Accuracy @ 25°C typ.   | 0.5 %: ± 0.5 % FS typ.<br>0.3 %: ± 0.3 % FS typ.                            |
|                                 | NLH @ 25°C (BSL) typ.  | 0.5 %: ± 0.2 % FS typ.<br>0.3 %: ± 0.2 % FS typ.                            |
|                                 | TC zero point and span typ.  | 0.5 %: ± 0.03 % FS/K typ.<br>0.3 %: ± 0.01 % FS/K typ.                      |
|                                 | Long term stability 1 year typ.  | ± 0.1 % FS typ.   |
| <b>Electrical Data</b>          | Output / supply voltage  | 4 ... 20 mA: 24 (9...32)VDC   |
|                                 | Rise time  | Typ. 1 ms / 10 ... 90 % nominal pressure                                    |
|                                 | Switch-on-delay  | 100 ms  |
|                                 | Inverse-polarity protection, short-circuit strength @ 25°C during 5 min. | 4 ... 20 mA: to $U_{\text{supply}} = 32 \text{ V}$                          |
| <b>Environmental conditions</b> | Media temperature  | -40°C ... +125°C  |
|                                 | Ambient temperature  | -40°C ... +125°C  |
|                                 | Protection <sup>1)</sup>   | IP65, IP67  |
|                                 | Humidity   | Max. 95% relative   |
|                                 | Vibration  | 15 g RMS (20...2000 Hz)<br>25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C) |
|                                 | Shock  | 50 g / 11 ms  |
| <b>EMC Protection</b>           | Emission   | EN/IEC 61000-6-3  |
|                                 | Immunity   | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)  | 1.4542 (AISI630)  |
|                                 | Pressure connection (wetted parts)                                       | 1.4542 (AISI630)  |
|                                 | Housing  | 1.4301 (AISI304)  |
|                                 | Sealing  | FPM/NBR/EPDM  |
|                                 | Male electrical plug   | See ordering information  |
|                                 | Weight   | ~ 50 g  |
|                                 | Mounting torque  | 25 Nm   |

<sup>1)</sup> See electrical connection


## Measuring accuracy 0.5 %

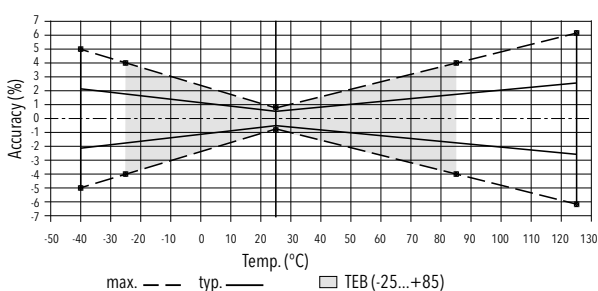


## Measuring accuracy 0.3 %

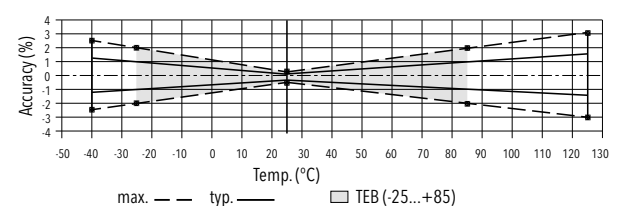


## Dimensions

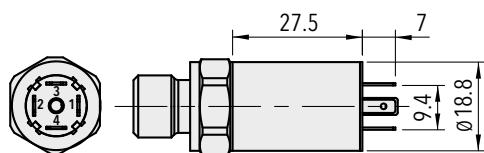


8256.XX.XXXX.01.XX.XX

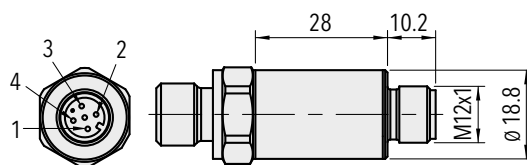


8256.XX.XXXX.32.XX.XX

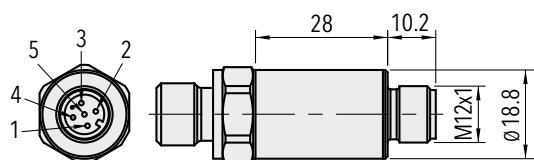


8256.XX.XXXX.35.XX.XX




8256.XX.XX17.XX.XX.XX




8256.XX.XX53.XX.XX.XX




8256.XX.XX30.XX.XX.XX



8256.XX.XX32.XX.XX.XX



8256.XX.XXXX.XX.XX.33




8256.XX.XXXX.XX.XX.34

## Electrical connection

|               |                           | Protection / electrical connection                          |                     |                     |   |   |
|---------------|---------------------------|---|---------------------|---------------------|---|---|
|               |                           | IP65*)  |                     | IP67*)              |   |   |
|               |                           | Industrial standard<br>Contact distance 9.4 mm<br><b>01</b> | M12x1               |                     |   |   |
|               |                           |   | 4-pole<br><b>32</b> | 5-pole<br><b>35</b> |   |   |
| Output signal |                           |   |                     |                     |   |   |
|               | <b>8256.XX.XXXX.XX.19</b> |   |                     |                     |   |   |
|               |                           | <b>90</b>   | <b>E1</b>           |                     |   |   |
|               |                           | 2   | 2                   | 1                   | 1 | 4 |
|               | 1                         | 4   | 3                   | 2                   | 1 |   |
|               | 4                         | 3   | 4                   | 4                   | 5 |   |

\*) Provided female connector is mounted according to instructions

4...20mA: min./max resistor vs. supply voltage @ Pmax = 100%

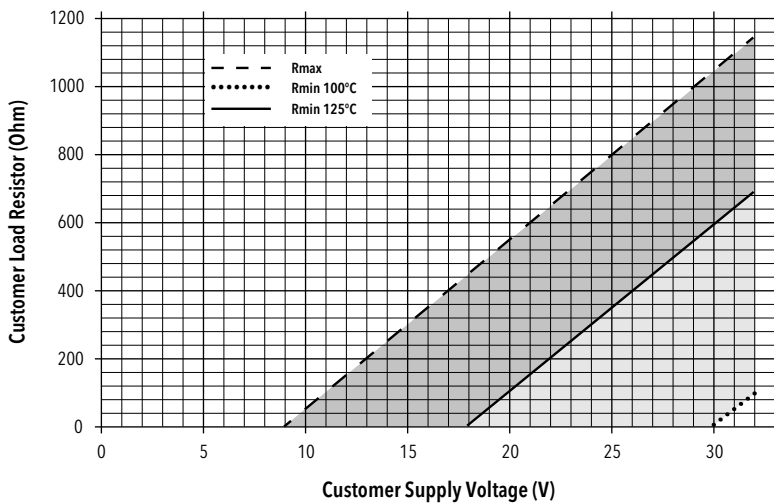

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72305">www.trafag.com/H72305</a> |
| Instructions | <a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a> |
| Flyer        | <a href="http://www.trafag.com/H70684">www.trafag.com/H70684</a> |

# LOW PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The very compact NSL low pressure transmitter is the only pressure transmitter in the market with thin-film-on-steel-membrane and pressure ranges down to 0 .. 200 mbar. This combination allows also for low pressure ranges accurate measurements with excellent longterm stability. Through the extraordinary high burst pressures up to 125 times nominal pressure the NSL is the first choice for critical applications.



## Applications

- Shipbuilding
- Engine manufacturing
- Machine tools
- Process technology
- Water treatment
- Test benches



## Features

- Smallest design
- Relative or absolute pressure measurement
- Excellent temperature resistance
- Improved vibration resistance
- Completely welded steel sensor system without additional seals

### Technical Data

|                      |  |                       |                  |
|----------------------|--|-----------------------|------------------|
| Measuring principle  | Thin film on steel   | Media temperature     | -40°C ... +125°C |
| Measuring range      | 0 ... 0.2 to 0 ... 2.5 bar<br>0 ... 3 to 0 ... 30 psi                  | Ambient temperature   | -40°C ... +125°C |
| Output signal        | 4 ... 20 mA, 0 ... 5 VDC, 0 ... 10 VDC,<br>0.5 ... 4.5 VDC ratiometric | Approval / conformity | DNV-GL, RINA     |
| Accuracy @ 25°C typ. | 0.15 ... 0.8 % FS typ.   |                       |                  |

Subject to change

## Ordering information/type code

8257 . XX . XX . XX . XX . XX . XX

| Measuring range <sup>1)</sup> | Pressure measurement range [bar]   | Over pressure [bar]     | Burst pressure [bar] |                   | Pressure measurement range [psi] | Over pressure [psi]   | Burst pressure [psi] |           |
|-------------------------------|--|-------------------------|----------------------|-------------------|----------------------------------|-----------------------|----------------------|-----------|
|                               |  | 0 ... 0.2 <sup>2)</sup> | 1.2                  | 25                | <b>68</b>                        | 0 ... 3 <sup>3)</sup> | 18                   | 350       |
|                               | 0 ... 0.4  | 1.2                     | 25                   | <b>69</b>         | 0 ... 5 <sup>3)</sup>            | 18                    | 350                  | <b>F9</b> |
|                               | 0 ... 0.6  | 1.5                     | 25                   | <b>70</b>         | 0 ... 10 <sup>3)</sup>           | 25                    | 350                  | <b>G0</b> |
|                               | 0 ... 1.0  | 2.0                     | 25                   | <b>71</b>         | 0 ... 15 <sup>3)</sup>           | 30                    | 350                  | <b>G1</b> |
|                               | 0 ... 1.6  | 3.5                     | 80                   | <b>73</b>         | 0 ... 25 <sup>3)</sup>           | 50                    | 1200                 | <b>G3</b> |
|                               | 0 ... 2.5  | 5.0                     | 80                   | <b>75</b>         | 0 ... 30 <sup>3)</sup>           | 70                    | 1200                 | <b>G5</b> |
| <b>Sensor</b>                 | Relative pressure, accuracy: 0.3%  |                         |                      |                   |                                  |                       |                      | <b>23</b> |
|                               | Absolute pressure, accuracy: 0.3%  |                         |                      |                   |                                  |                       |                      | <b>43</b> |
|                               | Relative pressure, accuracy: 0.15% <sup>4)</sup>                             |                         |                      |                   |                                  |                       |                      | <b>21</b> |
|                               | Absolute pressure, accuracy: 0.15% <sup>4)</sup>                             |                         |                      |                   |                                  |                       |                      | <b>41</b> |
| <b>Pressure connection</b>    | G1/4" male (O-Ring)  |                         |                      |                   |                                  |                       |                      | <b>17</b> |
|                               | 1/4"NPT male   |                         |                      |                   |                                  |                       |                      | <b>30</b> |
| <b>Electrical connection</b>  | Male electrical plug, Industrial standard (contact distance 9.4mm), Mat. PBT |                         |                      |                   |                                  |                       |                      | <b>01</b> |
|                               | Male electrical plug M12x1, 4-pole, Mat. PBT                                 |                         |                      |                   |                                  |                       |                      | <b>32</b> |
|                               | Male electrical plug M12x1, 5-pole, Mat. PBT                                 |                         |                      |                   |                                  |                       |                      | <b>35</b> |
| <b>Output</b>                 | <b>Output</b>  | <b>Load resistance</b>  |                      | <b>I (supply)</b> | <b>U (supply)</b>                |                       |                      |           |
|                               | 4 ... 20mA   | (Usupply-9V) / 20mA     |                      |                   | 24 (9 ... 32)VDC                 |                       |                      | <b>19</b> |
|                               | 0 ... 5 VDC <sup>5)</sup>  | ≥ 2.0 kΩ                |                      | ≤ 10 mA           | 24 (9 ... 32)VDC                 |                       |                      | <b>14</b> |
|                               | 0 ... 10 VDC <sup>5)</sup>   | ≥ 5.0 kΩ                |                      | ≤ 10 mA           | 24 (15 ... 32)VDC                |                       |                      | <b>17</b> |
|                               | 0.5 ... 4.5 VDC <sup>5)</sup>  | ≥ 2.0 kΩ                |                      | ≤ 10 mA           | 5 (4.5 ... 5.5)VDC ratiom.       |                       |                      | <b>23</b> |
| <b>Accessories</b>            | Female electrical plug M12x1, 5-pole, for executions 32 and 35               |                         |                      |                   |                                  |                       |                      | <b>33</b> |
|                               | Female electrical plug industrial standard                                   |                         |                      |                   |                                  |                       |                      | <b>34</b> |
|                               | Pressure peak damping element ø 1.0 mm                                       |                         |                      |                   |                                  |                       |                      | <b>40</b> |
|                               | Pressure peak damping element ø 0.3 mm                                       |                         |                      |                   |                                  |                       |                      | <b>43</b> |
|                               | Pressure peak damping element ø 0.5 mm                                       |                         |                      |                   |                                  |                       |                      | <b>45</b> |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Relative pressure only

<sup>3)</sup> No ship approval DNV

<sup>4)</sup> Only for pressure ranges from 0.6 bar / 10 psi

<sup>5)</sup> No ship approval



Identical construction with higher pressure ranges: Data sheet No. H72250, H72300

## Standard products (extra short lead time)


| Product No. | Type Code                          | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|------------------------------------|----------------------|--------------------------|--------------|--------------------------|
| NSL0.2A     | 8257 68 2317 32 0000 0000 19 33 43 | 0 ... 0.2            | 1.2                      | 9 ... 32     | ± 0.8                    |
| NSL0.4A     | 8257 69 2317 32 0000 0000 19 33 43 | 0 ... 0.4            | 1.2                      | 9 ... 32     | ± 0.5                    |
| NSL0.6A     | 8257 70 2317 32 0000 0000 19 33 43 | 0 ... 0.6            | 1.5                      | 9 ... 32     | ± 0.3                    |
| NSL1.0A     | 8257 71 2317 32 0000 0000 19 33 43 | 0 ... 1.0            | 2                        | 9 ... 32     | ± 0.3                    |
| NSL1.6A     | 8257 73 2317 32 0000 0000 19 33 43 | 0 ... 1.6            | 3.5                      | 9 ... 32     | ± 0.3                    |
| NSL2.5A     | 8257 75 2317 32 0000 0000 19 33 43 | 0 ... 2.5            | 5                        | 9 ... 32     | ± 0.3                    |

| Specifications                  |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Electrical Data</b>          | Output / supply voltage            | 4...20 mA: 24 (9...32) VDC<br>0...5 VDC: 24 (9...32) VDC<br>0...10 VDC: 24 (15...32) VDC<br>0.5...4.5 VDC: 5 VDC ratiom. |
|                                 | Rise time                          | Typ. 1 ms/10...90 % nominal pressure   |
|                                 | Switch-on-delay                    | 1 s  |
| <b>Environmental conditions</b> | Media temperature                  | -40°C ... +125°C   |
|                                 | Ambient temperature                | -40°C ... +125°C   |
|                                 | Protection <sup>1)</sup>           | Min. IP65  |
|                                 | Humidity                           | Max. 95 % relative   |
|                                 | Vibration                          | 25g (20...2000 Hz)   |
|                                 | Shock                              | 100 g/11ms   |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-4   |
|                                 | Immunity                           | EN/IEC 61000-6-2   |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4542 (AISI630)   |
|                                 | Pressure connection (wetted parts) | 1.4542 (AISI630)   |
|                                 | Housing                            | 1.4301 (AISI304)   |
|                                 | Sealing                            | FKM 70 Sh  |
|                                 | Male electrical plug               | See ordering information   |
|                                 | Weight                             | ~ 50 g   |
|                                 | Mounting torque                    | 25 Nm (see "Accuracy")   |


<sup>1)</sup> See electrical connection

| Accuracy   |               |                     |           |           |           |                      |                      |                   |     |
|--|---------------|---------------------|-----------|-----------|-----------|----------------------|----------------------|-------------------|-----|
|  |               | Sensor 23/43 (0.3%) |           |           |           |                      | Sensor 21/41 (0.15%) |                   |     |
| Range  | [bar]         | 0 ... 0.2           | 0 ... 0.4 | 0 ... 0.6 | 0 ... 1.0 | 0 ... 1.6            | 0...0.6              | 0...1.6           |     |
|  | [psi]         | 0 ... 3             | 0 ... 5   | 0 ... 10  | 0 ... 15  | 0 ... 25<br>0 ... 30 | 0...1.0<br>0...15    | 0...2.5<br>0...30 |     |
| NLH @ +25°C (+77°F) BSL  | [% FS typ.]   | 0.2                 | 0.2       | 0.2       | 0.2       | 0.2                  | 0.2                  | 0.2               | 0.2 |
| TEB @ -25...+85°C (-13...+185°F)   | [% FS typ.]   | 2                   | 1.5       | 1         | 1         | 1                    | 0.5                  | 0.5               |     |
| Accuracy@ +25°C (+77°F)  | [% FS typ.]   | 0.8                 | 0.5       | 0.3       | 0.3       | 0.3                  | 0.15                 | 0.15              |     |
| Long term stability 1 year @ +25°C (+77°F)   | [% FS typ.]   | 0.3                 | 0.15      | 0.1       | 0.1       | 0.1                  | 0.1                  | 0.1               |     |
| TC zero point and span   | [% FS/K typ.] | 0.02                | 0.015     | 0.01      | 0.01      | 0.01                 | 0.002                | 0.002             |     |
| Mounting dependency with 180° rotation (Vibration and shock: multiply this value with number of g) | [% FS typ.]   | 0.25                | 0.13      | 0.09      | 0.05      | < 0.05               | 0.05                 | < 0.05            |     |
| Error mounting torque @ 25Nm   | [% FS typ.]   | 0.25                | 0.13      | 0.09      | 0.05      | 0.05                 | 0.05                 | 0.05              |     |


## Dimensions




8257.XX.2317.XX.XX.XX  
8257.XX.2117.XX.XX.XX




8257.XX.2330.XX.XX.XX  
8257.XX.2130.XX.XX.XX




8257.XX.4317.XX.XX.XX  
8257.XX.4117.XX.XX.XX




8257.XX.4330.XX.XX.XX  
8257.XX.4130.XX.XX.XX




8257.XX.XXXX.01.XX.XX

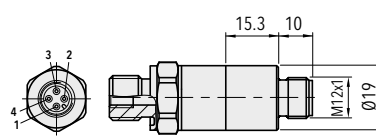


8257.XX.XXXX.32.XX.XX

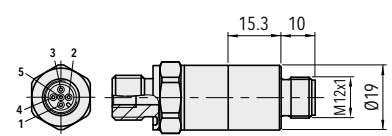


8257.XX.XXXX.35.XX.XX



8257.XX.XXXX.XX.XX.33



8257.XX.XXXX.XX.XX.34



Recommended mounting position  
(Mounting dependency with 180° rotation see 'Accuracy')

## Electrical Connection

|               |  | Protection / electrical connection                |                     |                     |
|---------------|--|---|---------------------|---------------------|
|               |  | IP65*)  | IP67*)              |                     |
|               |  | Industrial standard<br>EN175301-803A<br><b>01</b> | 4-pole<br><b>32</b> | 5-pole<br><b>35</b> |
| Output signal | <p><b>8257.XX.XXXX.XX.19</b></p>       |   |                     |                     |
|               | <p><b>8257.XX.XXXX.XX.14/17/23</b></p> |   |                     |                     |

\*) Provided female connector is mounted according to instructions

### Additional information

| Documents |              |  |
|-----------|--------------|--|
|           | Data sheet   | <a href="http://www.trafag.com/H72302">www.trafag.com/H72302</a> |
|           | Instructions | <a href="http://www.trafag.com/H73250">www.trafag.com/H73250</a> |
|           | Flyer        | <a href="http://www.trafag.com/H70671">www.trafag.com/H70671</a> |



# RAILWAY PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The pressure transmitter NAR 8258 with increased accuracy of 0.3 % was specifically designed for railway vehicles (EN 50155) and has a long-term stable thin-film-on-steel sensor cell. The wide temperature range from -40°C to +125°C and the triple overpressure protection make the NAR 8258 the ideal choice for railway vehicles in rough environmental conditions.



## Applications

- Railways

## Features

- Measuring accuracy 0.3 %
- Optional: Switching output 1 or 2 PNP transistors
- Excellent long-term stability
- Dielectrical strength: 710 VDC, meets EN 50155 (Railways)

| Technical Data       |   |                       |   |
|----------------------|---|-----------------------|---|
| Measuring principle  | Thin film on steel  | Media temperature     | -40°C ... +125°C  |
| Measuring range      | 0 ... 6 to 0 ... 600 bar<br>0 ... 100 to 0 ... 7500 psi     | Ambient temperature   | -40°C ... +125°C  |
| Output signal        | 4 ... 20 mA,<br>Switching output:<br>1 or 2 PNP transistors | Approval / conformity | EN 50155 (Railway)<br>EN 45545-2 (Fire protection)<br>EN 61373 (Shock, vibration)<br>EN 50121-3-2 (EMC) |
| Accuracy @ 25°C typ. | ± 0.3 % FS typ.   |                       |   |

Subject to change

## Ordering information/type code

|                                      |  |                                    |   | 8258 . XX |   |                            | XX                          | XX        | XX        | XX | XX |
|--------------------------------------|--|------------------------------------|---|-----------|---|----------------------------|-----------------------------|-----------|-----------|----|----|
| <b>Measuring range</b> <sup>1)</sup> | <b>Pressure measurement range [bar]</b>  | <b>Over pressure [bar]</b>         | <b>Burst pressure [bar]</b>                             |           | <b>Pressure measurement range [psi]</b> | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |           |           |    |    |
|                                      | 0 ... 6  | 18                                 | 100   | <b>77</b> | 0 ... 100                               | 300                        | 1450                        | <b>G7</b> |           |    |    |
|                                      | 0 ... 10   | 30                                 | 200   | <b>78</b> | 0 ... 150                               | 450                        | 2500                        | <b>G8</b> |           |    |    |
|                                      | 0 ... 16   | 48                                 | 200   | <b>79</b> | 0 ... 200                               | 600                        | 2500                        | <b>GA</b> |           |    |    |
|                                      | 0 ... 25 <sup>8)</sup>   | 75                                 | 300   | <b>80</b> | 0 ... 250                               | 750                        | 2500                        | <b>G9</b> |           |    |    |
|                                      | 0 ... 40 <sup>8)</sup>   | 120                                | 300   | <b>81</b> | 0 ... 300 <sup>8)</sup>                 | 900                        | 4000                        | <b>HA</b> |           |    |    |
|                                      | 0 ... 60 <sup>8)</sup>   | 180                                | 400   | <b>82</b> | 0 ... 400 <sup>8)</sup>                 | 1200                       | 4000                        | <b>H0</b> |           |    |    |
|                                      | 0 ... 100 <sup>8)</sup>  | 300                                | 500   | <b>83</b> | 0 ... 1000 <sup>8)</sup>                | 3000                       | 5000                        | <b>H2</b> |           |    |    |
|                                      | 0 ... 160 <sup>8)</sup>  | 480                                | 750   | <b>85</b> | 0 ... 1500 <sup>8)</sup>                | 4500                       | 7000                        | <b>H3</b> |           |    |    |
|                                      | 0 ... 250  | 750                                | 1000  | <b>74</b> | 0 ... 2000 <sup>8)</sup>                | 6000                       | 10000                       | <b>H5</b> |           |    |    |
|                                      | 0 ... 400  | 1000                               | 2000  | <b>84</b> | 0 ... 3000                              | 9000                       | 14500                       | <b>G4</b> |           |    |    |
|                                      | 0 ... 600  | 1500                               | 2500  | <b>86</b> | 0 ... 5000                              | 12500                      | 21750                       | <b>H4</b> |           |    |    |
|                                      |  |                                    |   |           | 0 ... 7500                              | 18750                      | 29000                       | <b>H6</b> |           |    |    |
|                                      | <b>Sensor</b>  | Relative pressure, accuracy: 0.3 % |   |           |   |                            |                             |           | <b>23</b> |    |    |
| <b>Pressure connection</b>           | G1/4" male, seal: DIN 3869 (accessory 61/63/83)  | <b>17</b>                          | 7/16"-20UNF SAE4 male, seal: accessory 61 <sup>7)</sup> |           | <b>42</b>                               |                            |                             |           |           |    |    |
|                                      | G1/4" male (Manometer) EN 871 <sup>8)</sup>  | <b>53</b>                          | M10x1 male, DIN EN ISO 6149-2                           |           | <b>32</b>                               |                            |                             |           |           |    |    |
|                                      | 1/4" NPT male  | <b>30</b>                          | M12x1.5 male, DIN EN ISO 9974-2 <sup>8)</sup>           |           | <b>49</b>                               |                            |                             |           |           |    |    |
| <b>Electrical connection</b>         | Male electrical plug, industrial standard, contact distance 9.4 mm, Mat. PA  |                                    |   |           |   |                            |                             | <b>01</b> |           |    |    |
|                                      | Male electrical plug M12x1, 4-pole, Mat. PA  |                                    |   |           |   |                            |                             | <b>32</b> |           |    |    |
|                                      | Male electrical plug M12x1, 5-pole, Mat. PA  |                                    |   |           |   |                            |                             | <b>35</b> |           |    |    |
| <b>Output signal</b>                 | <b>Signal output</b>   | <b>Load resistance</b>             | <b>I (supply)</b>                                       |           | <b>U (supply)</b>                       |                            |                             |           |           |    |    |
|                                      | 4 ... 20mA   | See graphic                        |   |           | 24 (9 ... 32) VDC                       |                            | <b>19</b>                   |           |           |    |    |
|                                      | 2 PNP transistors <sup>3)</sup>  |                                    | ≤ 10 mA   |           | 24 (9 ... 32) VDC                       |                            | <b>PS</b>                   |           |           |    |    |
|                                      |  |                                    | ≤ 10 mA   |           | 24 (9 ... 32) VDC                       |                            | <b>T1</b>                   |           |           |    |    |
| <b>Accessories</b>                   | Female electrical plug M12x1, 5-pole <sup>2)</sup>   |                                    |   |           |   |                            |                             | <b>33</b> |           |    |    |
|                                      | Female electrical connector industrial standard (for electrical connection 01)   |                                    |   |           |   |                            |                             | <b>34</b> |           |    |    |
|                                      | Pressure peak damping element ø 1.0 mm <sup>6)</sup>   |                                    |   |           |   |                            |                             | <b>40</b> |           |    |    |
|                                      | Pressure peak damping element ø 0.4 mm <sup>6)</sup>   |                                    |   |           |   |                            |                             | <b>44</b> |           |    |    |
|                                      | Seal FPM, -18°C ... +125°C   |                                    |   |           |   |                            |                             | <b>61</b> |           |    |    |
|                                      | Seal EPDM, -40°C ... +125°C  |                                    |   |           |   |                            |                             | <b>63</b> |           |    |    |
|                                      | Seal NBR, -25°C ... +100°C   |                                    |   |           |   |                            |                             | <b>83</b> |           |    |    |
|                                      | Special electrical connection: Pin 2 +, Pin 3 ground, Pin 4 - (only for output signal 19 and male electrical plug 01, industrial standard) |                                    |   |           |   |                            |                             | <b>90</b> |           |    |    |
|                                      | Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 ground (only for output signal 19 and male electrical plug 01, industrial standard) |                                    |   |           |   |                            |                             | <b>92</b> |           |    |    |
|                                      | Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 ground (only for output signal 19 and male electrical plug 32, M12x1, 4-pole)       |                                    |   |           |   |                            |                             | <b>E1</b> |           |    |    |
|                                      | Parameterisation according to customer specification (see table parameter), for output signal PS, T1                                       |                                    |   |           |   |                            |                             | <b>ZC</b> |           |    |    |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> For electrical connections 32 and 35

<sup>3)</sup> Only with electrical connection 32

<sup>4)</sup> Max. allowable pressure range 60 bar at 120 bar overpressure

<sup>5)</sup> Max. allowable pressure range 160 bar at 500 bar overpressure

<sup>6)</sup> Only for pressure connections 17, 30, 32

<sup>7)</sup> According to norm J1926, max. 35 MPa

<sup>8)</sup> Upon request

| Parameter  |                                 |  |            |                                    |
|--|---------------------------------|--|------------|------------------------------------|
| Name   | Standard setting (accessory ZS) | Value range  | Short name | Customer adjustment (accessory ZC) |
| Switch point SP1 (hysteresis mode)<br>Upper switch point FH1 (window mode)                             | 75 % Measuring range            | > RP1, FL1<br>Hysteresis $\geq$ 1 % FS   | SP1        |                                    |
| Reset point RP1 (hysteresis mode)<br>Lower switch point FL1 (window mode)                              | 25 % Measuring range            | < SP1, FH1<br>Hysteresis $\geq$ 1 % FS   | RP1        |                                    |
| Switch point SP2 (hysteresis mode)<br>Upper switch point FH2 (window mode)                             | 75 % Measuring range            | > RP2, FL2<br>Hysteresis $\geq$ 1 % FS   | SP2        |                                    |
| Reset point RP2 (hysteresis mode)<br>Lower switch point FL2 (window mode)                              | 25 % Measuring range            | < SP2, FH2<br>Hysteresis $\geq$ 1 % FS   | RP2        |                                    |
| Switch point delay time SP1 / RP1 (hysteresis mode)<br>Switch point delay time FH1 / FL1 (window mode) | 0                               | 0; 2 <sup>x</sup> [ms], x = 3, 4 ... 16  | dS1        |                                    |
| Switch point delay time SP2 / RP2 (hysteresis mode)<br>Switch point delay time FH2 / FL2 (window mode) | 0                               | 0; 2 <sup>x</sup> [ms], x = 3, 4 ... 16  | dS2        |                                    |
| Functions switching output 1   | Hysteresis, closer (Hno)        | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno),<br>Window NC (Fnc)                 | ou1        |                                    |
| Functions switching output 2   | Hysteresis, closer (Hno)        | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno),<br>Window NC (Fnc)<br>Device ready | ou2        |                                    |

## **i** Parameterization of switching points

The switching points, delay times and output functions can be parameterized via Smartphone app (Android). The SMI Sensor Master Interface required for the parameterization as well as the Smartphone are not part of the delivery. The Android App is available for free in the Google Play Store.

- Ordering No. SMI Sensor Master Interface: F90170 (available from the 2nd quarter of 2018)
- Data sheet SMI Sensor Master Interface: H72618



| Specifications                  |  |  |
|---------------------------------|--|--|
| <b>Electrical Data</b>          | Output / supply voltage  | 4 ... 20 mA: 24 (9...32) VDC<br>1 or 2 PNP transistors: 24 (9...32) VDC                                  |
|                                 | Switch-on-delay pressure transmitters                                    | 100 ms   |
|                                 | Switch-on-delay pressure switches  | 50 ms + switching delay time   |
|                                 | Inverse-polarity protection, short-circuit strength @ 25°C during 5 min. | 4...20 mA: to $U_s = 32$ VDC<br>1 or 2 PNP transistors: to $U_s = 32$ VDC                                |
| <b>Environmental conditions</b> | Media temperature  | -40°C ... +125°C   |
|                                 | Ambient temperature  | -40°C ... +125°C   |
|                                 | Protection <sup>1)</sup>   | IP65, IP67   |
|                                 | Humidity   | Max. 95 % relative   |
|                                 | Vibration  | 15 g RMS (20...2000 Hz) (EN60068-2-64)<br>25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C) (EN60068-2-6) |
|                                 | Shock  | 50 g / 11 ms<br>100 g / 6 ms Male electrical plug M12x1 (EN60068-2-27) <sup>3)</sup>                     |
| <b>EMC Protection</b>           | Emission   | EN/IEC 61000-6-3<br>EN50121-3-2  |
|                                 | Immunity   | EN/IEC 61000-6-2<br>EN50121-3-2 <sup>2)</sup>  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)  | 1.4542 (AISI630)   |
|                                 | Pressure connection (wetted parts)                                       | 1.4542 (AISI630)   |
|                                 | Housing  | 1.4301 (AISI304)   |
|                                 | Sealing  | FPM/EPDM/NBR   |
|                                 | Male electrical plug   | See ordering information   |
|                                 | Weight   | appr. 50 g   |
|                                 | Mounting torque  | 25 Nm  |

<sup>1)</sup> See electrical connection

<sup>2)</sup> Surge voltage on shield, shield connected on both sides

<sup>3)</sup> For electrical connections 32 and 35


## Analogue output

|           |  |               |        |
|-----------|--|---------------|--------|
| Accuracy  | TEB @ -25 ... +85°C                      | [% FS typ.]   | ± 1.0  |
|           | Accuracy @ +25°C                         | [% FS typ.]   | ± 0.3  |
|           | NLH @ +25°C (BSL)                        | [% FS typ.]   | ± 0.2  |
|           | TC zero point and span                   | [% FS/K typ.] | ± 0.01 |
| Rise time | Long term stability 1 year               | [% FS typ.]   | ± 0.1  |
|           | Typ. 1 ms / 10 ... 90 % nominal pressure |               |        |

## Switching output

|                                  |  |                                 |   |
|----------------------------------|--|---------------------------------|---|
| Accuracy                         | TEB @ -25 ... +85°C  | [% FS typ.]                     | ± 1.0                                     |
|                                  | Accuracy @ +25°C   | [% FS typ.]                     | ± 0.3                                     |
|                                  | Long term stability 1 year                                   | [% FS typ.]                     | ± 0.1                                     |
| Adjustment range of switchpoints | 1 ... 99 % FS  |                                 |   |
| Distance switch point            | ≥ 1.0 % FS   |                                 |   |
| Switch point > reset point       | Switchpoint > reset point                                    |                                 |   |
| Switching resistance             | ≤ 3 Ω  |                                 |   |
| Output function                  | Hysteresis, Window; normally closed (NO), normally open (NC) |                                 |   |
| Switching current                | -40°C ... +85°C  | (Ambient and media temperature) | ≤ 400 mA, total of both switching outputs |
|                                  | +85°C ... +125°C   | (Ambient and media temperature) | ≤ 200 mA, total of both switching outputs |
| Current limiting                 | integrated   |                                 |   |
| Delay time                       | 0; 2*[ms], x = 3, 4 ... 16                                   |                                 |   |
| Switching frequency              | max. 60 Hz (at switching delay time = 0)                     |                                 |   |

## Measuring accuracy

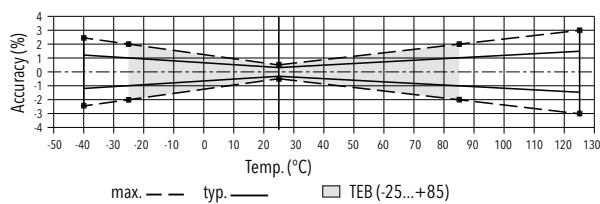


| Additional specifications railways |  |                        |  |
|------------------------------------|--|------------------------|--|
| Environmental conditions           | Cold   | EN 60068-2-1           | Ab: -40°C, 2 h (not in operation)<br>Ae: -40°C, 1 h (in operation) |
|                                    | Dry heat   | EN 60068-2-2           | Be: 85°C, 6 h (in operation)                                       |
|                                    | Damp heat, cyclical  | EN 60068-2-30          | Db: 55°C, variant 1, 2 cycles (2 x 24 h)                           |
|                                    | Ambient temperature  | EN 50155               | Class TX   |
|                                    | Vibration and shock  | EN 61373               | Vibration: category 3<br>Shock: category 3 <sup>1)</sup>           |
|                                    | Dielectrical strength  | EN 50155               | 710 VDC  |
|                                    | Resistance of insulation                                     | EN 50155               | >100 MΩ, 500 VDC   |
| Supply                             | Behavior in case of fire (electrical connections 01, 32, 35) | EN 45545-2             | Weight: < 10 g<br>Surface: < 0.2 m <sup>2</sup>                    |
|                                    | Nominal voltage  | EN 50155 <sup>2)</sup> | 24 V   |
|                                    | Interruptions of the voltage supply                          | EN 50155 <sup>2)</sup> | Class S1   |
|                                    | Switching between two supply voltages                        | EN 50155 <sup>2)</sup> | Class C1   |


<sup>1)</sup> In Category 3 the 2010 versions' higher severity levels apply in each case

<sup>2)</sup> Chapter 5.1 Voltage supply


## Dimensions

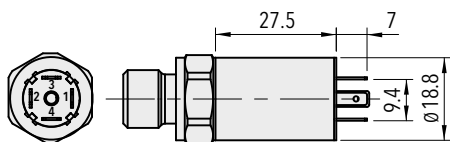


8258.XX.XXXX.01.XX.XX

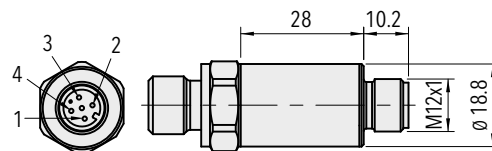


8258.XX.XXXX.32.XX.XX

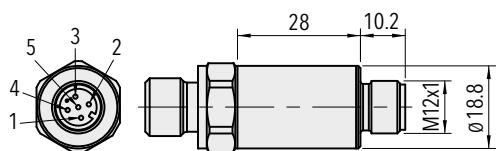


8258.XX.XXXX.35.XX.XX




8258.XX.XX17.XX.XX.XX




8258.XX.XX53.XX.XX.XX




8258.XX.XX30.XX.XX.XX




8258.XX.XX42.XX.XX.XX




8258.XX.XX32.XX.XX.XX



8258.XX.XX49.XX.XX.XX




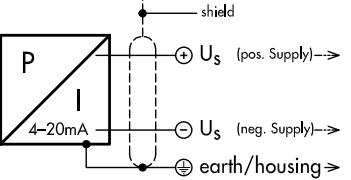
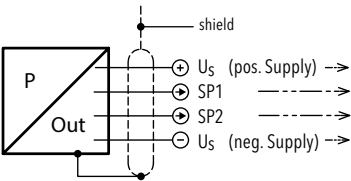


8258.XX.XXXX.XX.XX.33



8258.XX.XXXX.XX.XX.34



## Electrical connection

|               |   | Protection / electrical connection  |           |   |            |   |   |
|---------------|---|---|-----------|---|------------|---|---|
|               |   | IP65 *)**)  |           |   | IP67 *)**) |   |   |
|               |   | Industrial standard<br>Contact distance 9.4 mm<br><b>01</b>                       |           | M12x1<br>4-pole<br><b>32</b>  |            | 5-pole<br><b>35</b>   |   |
|               |   |  |           |  |            |  |   |
| Output signal |  <p><b>8258.XX.XXXX.XX.19</b></p>    |   | <b>90</b> | <b>92</b>   | <b>E1</b>  |   |   |
|               |   | 2   | 2         | 1   | 1          | 1   | 4 |
|               | 1   | 4   | 2         | 3   | 2          | 1   |   |
|               | 4   | 3   | 4         | 4   | 4          | 5   |   |
|               |  <p><b>8258.XX.XXXX.XX.PS/T1</b></p> |   |           | <b>PS</b>   | <b>T1</b>  |   |   |
|               |   |   |           | 1   | 1          |   |   |
|               |   |   |           | 4   | 4          |   |   |
|               |   |   |           | 2   | -          |   |   |
|               |   |   |           | 3   | 3          |   |   |

\*) Provided female connector is mounted according to instructions

\*\*) Ventilation via male electric plug/cable end


4...20mA: min./max resistor vs. supply voltage @ Pmax = 100%

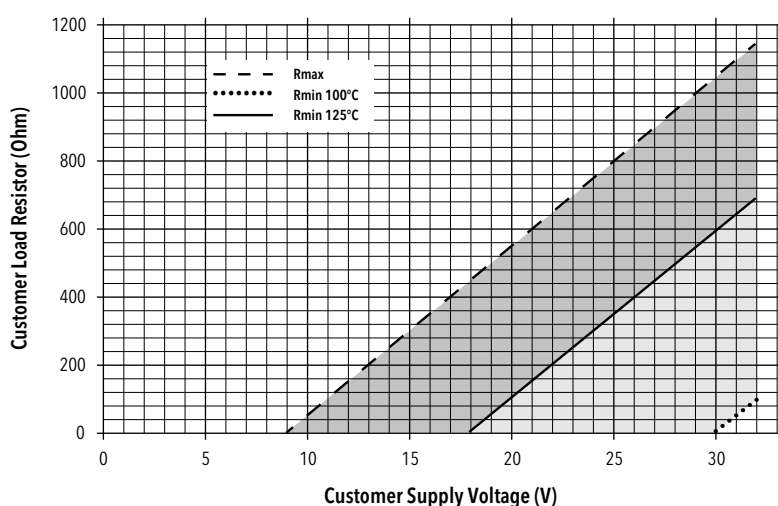

Connection of loads to switching output



## Functions switching output

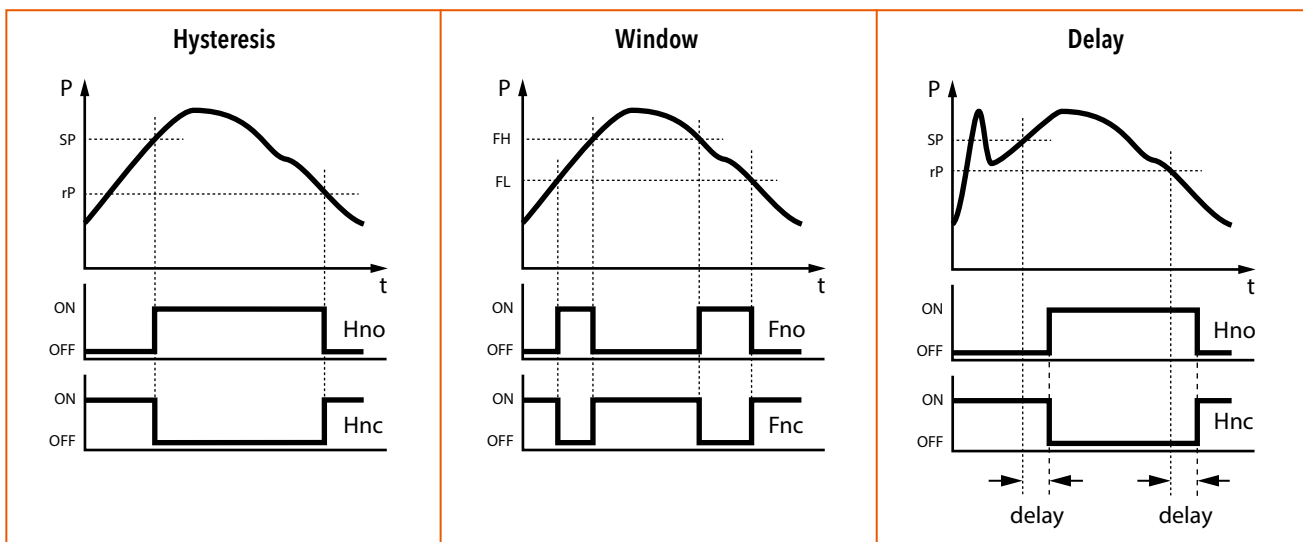

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72307">www.trafag.com/H72307</a> |
| Instructions | <a href="http://www.trafag.com/H73303">www.trafag.com/H73303</a> |
| Flyer        | <a href="http://www.trafag.com/H70697">www.trafag.com/H70697</a> |

# INDUSTRIAL PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The economical pressure transmitter ECT 8472 is based on the tried and true ECT line of transmitters. The wide media temperature range from -25 to 125°C in combination with a comprehensive set of features and options makes the ECT 8472 pressure transmitter a versatile solution suitable for most industrial applications.



## Applications

- Machine tools
- Hydraulics
- Water treatment

## Features

- Relative or absolute pressure measurement
- Titanium version optional
- Excellent media compatibility
- Wide selection of designs and options

### Technical Data

|                     |   |                      |  |
|---------------------|---|----------------------|--|
| Measuring principle | Thick film on ceramic   | Accuracy @ 25°C typ. | ± 0.5 % FS typ.  |
| Measuring range     | 0 ... 1 to 0 ... 400 bar<br>0 ... 15 to 0 ... 5000 psi                          | Media temperature    | -25°C ... +125°C<br>400 bar/5000 psi: -10°C ... +125°C   |
| Output signal       | 4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC,<br>0 ... 10 VDC, 0.5 ... 4.5 VDC ratiom. | Ambient temperature  | -25°C ... +85°C<br>Cable PVC 22: -5°C ... +60°C<br>Cable PUR 24: -20°C ... +70°C<br>Cable Raychem 08: -20°C ... +100°C |

Subject to change

## Ordering information/type code

|   |  |   |                             | 8472 . XX  | XX  | XX        | XX        | XX        | XX |
|---|--|---|-----------------------------|--|---|-----------|-----------|-----------|----|
| <b>Measuring range <sup>1)</sup></b>  | <b>Pressure measurement range [bar]</b>  | <b>Over pressure [bar]</b>  | <b>Burst pressure [bar]</b> |  |   |           |           |           |    |
|   | 0 ... 1.0  | 2   | 3                           | <b>71</b>  | 0 ... 15  | 30        | 40        | <b>G1</b> |    |
|   | 0 ... 1.6  | 3.2   | 4.8                         | <b>73</b>  | 0 ... 20  | 45        | 70        | <b>G3</b> |    |
|   | 0 ... 2.5  | 5   | 7.5                         | <b>75</b>  | 0 ... 30  | 60        | 90        | <b>G5</b> |    |
|   | 0 ... 4  | 8   | 12                          | <b>76</b>  | 0 ... 50  | 100       | 150       | <b>G6</b> |    |
|   | 0 ... 6  | 12  | 15                          | <b>77</b>  | 0 ... 100   | 200       | 250       | <b>G7</b> |    |
|   | 0 ... 10   | 20  | 25                          | <b>78</b>  | 0 ... 150   | 300       | 375       | <b>G8</b> |    |
|   | 0 ... 16   | 32  | 40                          | <b>79</b>  | 0 ... 250   | 500       | 625       | <b>G9</b> |    |
|   | 0 ... 25   | 50  | 75                          | <b>80</b>  | 0 ... 400   | 800       | 1200      | <b>H0</b> |    |
|   | 0 ... 40   | 80  | 100                         | <b>81</b>  | 0 ... 500   | 1000      | 1250      | <b>H1</b> |    |
|   | 0 ... 60   | 120   | 180                         | <b>82</b>  | 0 ... 1000  | 2000      | 3000      | <b>H2</b> |    |
|   | 0 ... 100 <sup>4)</sup>  | 200   | 300                         | <b>83</b>  | 0 ... 1500 <sup>4)</sup>  | 3000      | 4500      | <b>H3</b> |    |
|   | 0 ... 160 <sup>4)</sup>  | 320   | 480                         | <b>85</b>  | 0 ... 2000 <sup>4)</sup>  | 4000      | 6000      | <b>H5</b> |    |
|   | 0 ... 250 <sup>4)</sup>  | 500   | 750                         | <b>74</b>  | 0 ... 3000 <sup>4)</sup>  | 6000      | 9000      | <b>G4</b> |    |
|   | 0 ... 400 <sup>2) 4)</sup>   | 800   | 1000                        | <b>84</b>  | 0 ... 5000 <sup>2) 4)</sup>   | 10000     | 12500     | <b>H4</b> |    |
|   | <b>Sensor</b>  | Relative pressure, Material pressure connection and housing: 1.4305 (AISI303) |                             | <b>57</b>  | Absolute pressure, Material pressure connection and housing: 1.4305 (AISI303) <sup>3)</sup> |           |           | <b>87</b> |    |
| Relative pressure, Material pressure connection and housing: 1.4404/1.4435 (AISI316L) <sup>4)</sup> |  |   | <b>59</b>                   | Absolute pressure, Material pressure connection and housing: 1.4404/1.4435 (AISI316L) <sup>3) 4)</sup> |   |           | <b>89</b> |           |    |
| Relative pressure, Material pressure connection and housing: 1.4462 (AISI318LN) <sup>4)</sup>       |  |   | <b>52</b>                   | Absolute pressure, Material pressure connection and housing: 1.4462 (AISI318LN) <sup>3) 4)</sup>       |   |           | <b>82</b> |           |    |
| Relative pressure, titanium grade 5 <sup>4)</sup>   |  |   | <b>53</b>                   | Absolute pressure, titanium grade 5 <sup>3) 4)</sup>   |   |           | <b>83</b> |           |    |
|   |  |   |                             |  |   |           |           |           |    |
| <b>Pressure connection</b>  | G1/4" female   |   |                             |  |   |           | <b>10</b> |           |    |
|   | G1/4" male   |   |                             |  |   |           | <b>17</b> |           |    |
|   | G1/2" male DIN3852-A <sup>4)</sup>   |   |                             |  |   |           | <b>21</b> |           |    |
|   | G1/2" male DIN3852-E <sup>4)</sup>   |   |                             |  |   |           | <b>41</b> |           |    |
|   | 1/4" NPT male, ANSI B1.20.1 <sup>4)</sup>  |   |                             |  |   |           | <b>30</b> |           |    |
|   | 1/8" NPT male, ANSI B1.20.1 <sup>11)</sup>   |   |                             |  |   |           | <b>43</b> |           |    |
|   | 7/16" -20UNF male SAE <sup>4) 10)</sup>  |   |                             |  |   |           | <b>42</b> |           |    |
|   | 7/16" -20UNF male, DIN3866, max. 40 bar  |   |                             |  |   |           | <b>18</b> |           |    |
|   | 7/16" -20UNF female SAE J512 with valve opener, max. 40 bar                                |   |                             |  |   |           | <b>24</b> |           |    |
|   | R1/4" male, DIN3858  |   |                             |  |   |           | <b>19</b> |           |    |
| G3/4" frontal membrane <sup>4) 7)</sup>   |  |   |                             |  |   | <b>52</b> |           |           |    |
| <b>Electrical connection</b>  | Male electrical plug EN 175301-803-A, Mat. PA  |   |                             |  |   |           | <b>05</b> |           |    |
|   | Male electrical plug M12x1, 5-pole, Mat. PA (Old shape), Mat. PBT (New shape)              |   |                             |  |   |           | <b>35</b> |           |    |
|   | Male electrical plug Packard Metri Pack, Mat. PBT <sup>9)</sup>                            |   |                             |  |   |           | <b>51</b> |           |    |
|   | Male electrical plug industrial standard (contact distance 9.4 mm) Mat. PBT                |   |                             |  |   |           | <b>01</b> |           |    |
|   | Cable PUR, cable gland PA 6-3, -20°C ... +70°C <sup>5) 6)</sup>                            |   |                             |  |   |           | <b>24</b> |           |    |
|   | Cable PVC, cable gland PA 6-3, -5°C ... +60°C <sup>5) 6) 9)</sup>                          |   |                             |  |   |           | <b>22</b> |           |    |
|   | Cable Raychem, cable gland PA 6-3, -20°C ... +100°C <sup>5) 6) 9)</sup>                    |   |                             |  |   |           | <b>08</b> |           |    |
|   | Cable IP68, Mat. PVC, max. 3m, Medium +10°C ... +35°C, Pmax. 1 bar rel./abs. (old version) |   |                             |  |   |           | <b>68</b> |           |    |
| <b>Output signal</b>  | <b>Signal output</b>   | <b>Load resistance</b>  | <b>I (supply)</b>           | <b>U (supply)</b>  |   |           |           |           |    |
|   | 4 ... 20 mA  | (U <sub>supply</sub> -9 V) / 20 mA  |                             | 9 ... 30 VDC   |   |           |           | <b>19</b> |    |
|   | 0 ... 5 VDC  | ≥ 2.5 kΩ  | ≤ 10 mA                     | 10 ... 30 VDC  |   |           |           | <b>14</b> |    |
|   | 1 ... 6 VDC  | ≥ 5.0 kΩ  | ≤ 10 mA                     | 10 ... 30 VDC  |   |           |           | <b>16</b> |    |
|   | 0 ... 10 VDC   | ≥ 5.0 kΩ  | ≤ 10 mA                     | 15 ... 30 VDC  |   |           |           | <b>17</b> |    |
|   | 0.5 ... 4.5 VDC ratiometric  | ≥ 5.0 kΩ  | ≤ 10 mA                     | 5 VDC ± 0.25 VDC ratiom.   |   |           |           | <b>23</b> |    |

|                    |   |    |
|--------------------|---|----|
| <b>Accessories</b> | Seal FKM (-20°C ... +125°C)   | 61 |
|                    | Seal CR ≤ 100 bar (-25°C ... +100°C) <sup>8)</sup>  | 62 |
|                    | Seal EPDM (-25°C ... +125°C)  | 63 |
|                    | Pressure peak damping element ø 1.0 mm (for pressure connections 17 and 30)   | 40 |
|                    | Pressure peak damping element ø 0.3 mm (for pressure connections 17 and 30)   | 43 |
|                    | Pressure peak damping element ø 0.4 mm <sup>7)</sup>  | 44 |
|                    | Pressure peak damping element ø 0.5 mm (for pressure connections 17 and 30)   | 45 |
|                    | Female electrical connector EN 175301-803-A (DIN43650-A)  | 58 |
|                    | Female electrical plug M12x1, 5-pole  | 33 |
|                    | Female electrical connector industrial standard   | 34 |
|                    | Special electrical connection: Pin 1 + , Pin 2 -<br>(only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A)                   | 92 |
|                    | Special electrical connection: Pin 1 Out , Pin 2 - , Pin 3 +<br>(only for output 14, 16, 17, 23 and male electrical plug EN175301-803-A / DIN43650-A)           | 98 |
|                    | Special electrical connection: Pin 1 + , Pin 2 - , Pin 3 Out<br>(only for output signals 14, 16, 17, 23 and male electrical plug EN 175301-803-A / DIN 43650-A) | 97 |
|                    | Special electrical connection: Pin 1 + , Pin 3 -<br>(only for output 4 ... 20 mA and male electrical plug Packard Metri Pack 3-poles)                           | E4 |
|                    | Special electrical connection: Pin 1 + , Pin 2 Out Pin 3 -<br>(only for output signals 14, 16, 17, 23 and male electrical plug Packard Metri Pack 3-poles)      | 99 |
|                    | Cable length 1.5 m  | 1M |
|                    | Cable length 3.0 m  | 3M |
|                    | Cable length 5.0 m  | 5M |
|                    | Housing nut for electrical connection EN175301-803-A (DIN43650-A) secured with Loctite (max. 85°C)  | L9 |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Media -10°C ... +125°C

<sup>3)</sup> Absolute ranges max. 40 bar

<sup>4)</sup> Please ask us

<sup>5)</sup> Cable length see accessories (max. length 50 m, in 5-meter sections)

<sup>6)</sup> Protection IP68: Immersion depth max. 3 m, Media +10°C ... +35°C

<sup>7)</sup> Not for sensors 57 and 87, only for pressure ranges ≤ 10 bar or 150 psi

<sup>8)</sup> Only for pressure connections 10, 30, 43, 42, 18, 24, 19

<sup>9)</sup> Pressure ranges > 16 bar (Pressure ranges ≤ 16 bar upon request)

<sup>10)</sup> According to norm J1926, max. 35 MPa

<sup>11)</sup> Only for sensors 59 and 89 and electrical connections 01, 35, 51 (others on request)



Identical construction for refrigeration: Data sheet No. H72323


### Standard products (extra short lead time)

| Product No. | Type Code                          | Pressure range [bar] | Over pressure max. [bar] | Signal output | Supply [VDC] |
|-------------|------------------------------------|----------------------|--------------------------|---------------|--------------|
| ECT1.0A     | 8472 71 5717 05 0000 0000 19 58 61 | 0 ... 1              | 3.2                      | 4 ... 20 mA   | 9 ... 30     |
| ECT2.5A     | 8472 75 5717 05 0000 0000 19 58 61 | 0 ... 2.5            | 5                        | 4 ... 20 mA   | 9 ... 30     |
| ECT6.0A     | 8472 77 5717 05 0000 0000 19 58 61 | 0 ... 6              | 12                       | 4 ... 20 mA   | 9 ... 30     |
| ECT10.0A    | 8472 78 5717 05 0000 0000 19 58 61 | 0 ... 10             | 20                       | 4 ... 20 mA   | 9 ... 30     |
| ECT16.0A    | 8472 79 5717 05 0000 0000 19 58 61 | 0 ... 16             | 32                       | 4 ... 20 mA   | 9 ... 30     |
| ECT25.0A    | 8472 80 5717 05 0000 0000 19 58 61 | 0 ... 25             | 50                       | 4 ... 20 mA   | 9 ... 30     |
| ECT40.0A    | 8472 81 5717 05 0000 0000 19 58 61 | 0 ... 40             | 80                       | 4 ... 20 mA   | 9 ... 30     |
| ECT1.0V     | 8472 71 5717 05 0000 0000 17 58 61 | 0 ... 1              | 3.2                      | 0 ... 10 VDC  | 15 ... 30    |
| ECT2.5V     | 8472 75 5717 05 0000 0000 17 58 61 | 0 ... 2.5            | 5                        | 0 ... 10 VDC  | 15 ... 30    |
| ECT6.0V     | 8472 77 5717 05 0000 0000 17 58 61 | 0 ... 6              | 12                       | 0 ... 10 VDC  | 15 ... 30    |
| ECT10.0V    | 8472 78 5717 05 0000 0000 17 58 61 | 0 ... 10             | 20                       | 0 ... 10 VDC  | 15 ... 30    |
| ECT16.0V    | 8472 79 5717 05 0000 0000 17 58 61 | 0 ... 16             | 32                       | 0 ... 10 VDC  | 15 ... 30    |
| ECT25.0V    | 8472 80 5717 05 0000 0000 17 58 61 | 0 ... 25             | 50                       | 0 ... 10 VDC  | 15 ... 30    |
| ECT40.0V    | 8472 81 5717 05 0000 0000 17 58 61 | 0 ... 40             | 80                       | 0 ... 10 VDC  | 15 ... 30    |

| Specifications                  |  |   |
|---------------------------------|--|---|
| <b>Accuracy</b>                 | TEB typ. @ -25 ... +85°C   | ± 3.0 % FS typ.   |
|                                 | Accuracy @ 25°C typ.   | ± 0.5 % FS typ.   |
|                                 | NLH @ 25°C (BSL) typ.  | ± 0.2 % FS typ.   |
|                                 | TC zero point and span typ.  | ± 0.03 % FS/K typ.  |
|                                 | Long term stability 1 year typ.  | ± 0.3 % FS typ.   |
| <b>Electrical Data</b>          | Output / supply voltage  | 4 ... 20 mA: 24 (9 ... 30) VDC<br>0 ... 5 VDC: 24 (10 ... 30) VDC<br>1 ... 6 VDC: 24 (10 ... 30) VDC<br>0 ... 10 VDC: 24 (15 ... 30) VDC<br>0.5 ... 4.5 VDC ratiom. |
|                                 | Rise time  | Typ. 1 ms / 10 ... 90 % nominal pressure  |
|                                 | Switch-on-delay  | Max. 1.5 s  |
|                                 | Inverse-polarity protection, short-circuit strenght @ 25°C during 5 min. | 4 ... 20 mA: to $U_s = 30$ VDC<br>0 ... 10 VDC, 0 ... 5 VDC, 1 ... 6 VDC:<br>to $U_s = 30$ VDC<br>0.5 ... 4.5 VDC ratiometric: to $U_s = 5.25$ VDC                  |
| <b>Environmental conditions</b> | Media temperature  | -25°C ... +125°C<br>400 bar/5000 psi: -10°C ... +125°C  |
|                                 | Ambient temperature  | -25°C ... +85°C<br>Cable PVC 22: -5°C ... +60°C<br>Cable PUR 24: -20°C ... +70°C<br>Cable Raychem 08: -20°C ... +100°C  |
|                                 | Protection <sup>1)</sup>   | IP65, IP67, IP68  |
|                                 | Humidity   | Max. 95 % relative  |
|                                 | Vibration  | 4 g (10...2000 Hz)  |
|                                 | Shock  | 50 g / 8 ms   |
| <b>EMC Protection</b>           | Emission   | EN/IEC 61000-6-3  |
|                                 | Immunity   | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)  | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)  |
|                                 | Pressure connection (wetted parts)                                       | 57/87: 1.4305 (AISI303)<br>59/89: 1.4404/1.4435 (AISI316L)<br>52/82: 1.4462 (AISI318LN)<br>53/83: Titanium Grade 5  |
|                                 | Housing  | 57/87: 1.4305 (AISI303)<br>59/89: 1.4404/1.4435 (AISI316L)<br>52/82: 1.4462 (AISI318LN)<br>53/83: Titanium Grade 5  |
|                                 | Sealing  | FKM 70 Sh, CR, EPDM   |
|                                 | Male electrical plug   | See ordering information  |
|                                 | Weight   | ~ 110 g   |
|                                 | Mounting torque  | 15 ... 20 Nm  |

<sup>1)</sup> See electrical connection

## Measuring accuracy 0.5 %

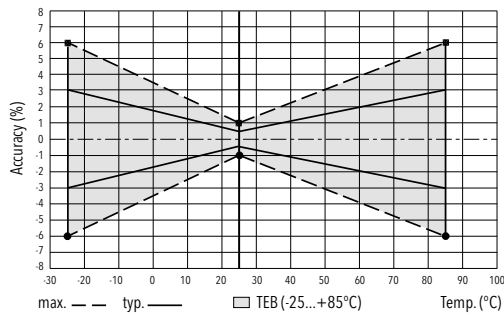

## Electrical connection

|               |   | Protection / electrical connection       |                     |                                     |   |                          |                     |       |
|---------------|---|--|---------------------|-------------------------------------|---|--------------------------|---------------------|-------|
|               |   | IP65*)                                   | IP67*)              | IP67*)                              | IP65  | IP67/IP68 max. 3m        | IP68 max. 3 m       |       |
|               |   | Industrial standard<br>EN175301-803A **) | M12x1 **)<br>5-pole | Packard<br>Metri Pack **)<br>3-pole | Industrial standard<br>Contact distance<br>9.4 mm **) | Cable**) <b>24/22/68</b> | Cable **) <b>08</b> |       |
|               |   | <b>05</b>                                | <b>35</b>           | <b>51</b>                           | <b>01</b>   |                          |                     |       |
| Output signal | <p><b>8472.xx.xxxx.xx.19</b></p>          | Standard                                 | <b>92</b>           |                                     | <b>E4</b>   |                          |                     |       |
|               | <p><b>8472.xx.xxxx.xx.14/16/17/23</b></p> | Standard                                 | <b>98</b>           | <b>97</b>                           | <b>99</b>   |                          |                     |       |
|               |   |  | 1                   | 2                                   | 1   | 1                        | white               | red   |
|               |   | 2  | 2                   | 1                                   | 2   | 2                        | brown               | black |
|               |   | 1  | 3                   | 3                                   | 3   | 3                        | yellow              | green |
|               |   | ⊖  | ⊖                   | ⊖                                   | ⊖   | ⊖                        |                     |       |
|               |   |  | 4                   | 4                                   | 1   | 1                        | white               | red   |
|               |   |  | 1                   | 3                                   | 3   | 2                        | green               | white |
|               |   |  | 2                   | 2                                   | 2   | 3                        | brown               | black |
|               |   | ⊖  | ⊖                   | ⊖                                   | ⊖   | ⊖                        | yellow              | green |

\*) Provided female connector is mounted according to instructions

\*\*) Ventilation via male electric plug/cable end


\*\*\*) Only cable versions or female electrical plug with shield connection

### Additional information


#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72324">www.trafag.com/H72324</a> |
| Instructions | <a href="http://www.trafag.com/H73324">www.trafag.com/H73324</a> |
| Flyer        | <a href="http://www.trafag.com/H70662">www.trafag.com/H70662</a> |


## Dimensions




8472.XX.XXXX.05.XX.XX




8472.XX.XXXX.35.XX.XX Old shape

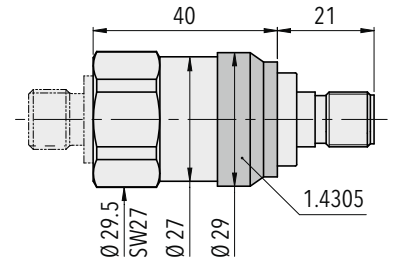


8472.XX.XXXX.35.XX.XX New shape

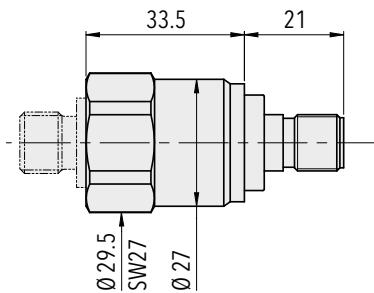


8472.XX.X717.35.XX.XX  
8472.XX.X942.35.XX.XX

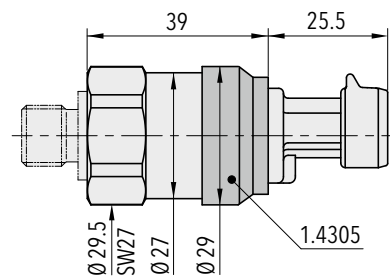


8472.XX.XXXX.51.XX.XX

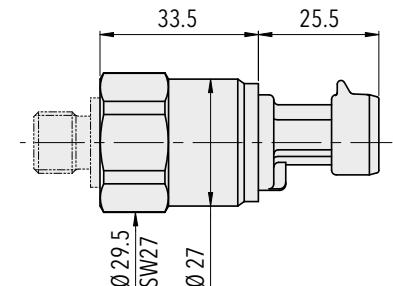


8472.XX.X717.51.XX.XX  
8472.XX.X942.51.XX.XX

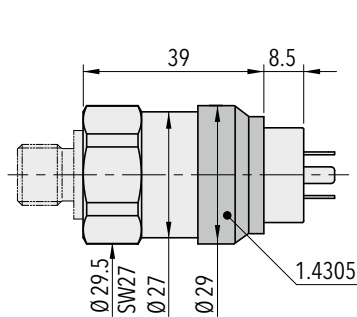

8472.XX.XXXX.01.XX.XX




8472.XX.X717.01.XX.XX  
8472.XX.X942.01.XX.XX




1) Tightening torque 50...60Ncm


8472.XX.XXXX.XX.XX.58



8472.XX.XXXX.XX.XX.34

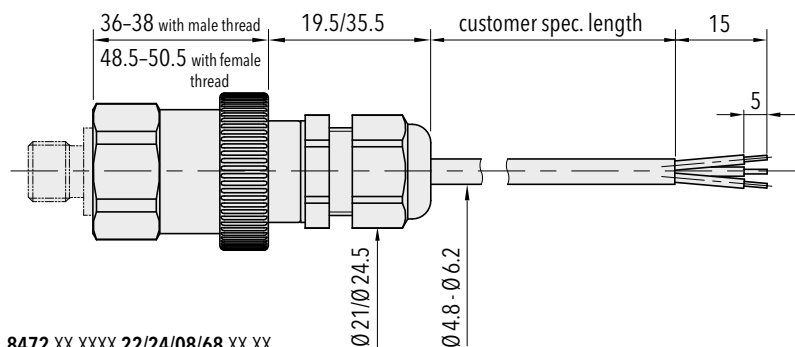


8472.XX.XXXX.22/24/08/68.XX.XX




8472.XX.XXXX.XX.XX.33


## Dimensions




8472.XX.XX10.XX.XX.XX




8472.XX.XX17.XX.XX.XX




8472.XX.XX21.XX.XX.XX




8472.XX.XX41.XX.XX.XX




8472.XX.XX30.XX.XX.XX




8472.XX.XX943.XX.XX.XX




8472.XX.XX42.XX.XX.XX




8472.XX.XX18.XX.XX.XX




8472.XX.XX24.05.XX.XX.XX





8472.XX.XX24.XX.XX.XX



8472.XX.XX19.XX.XX.XX

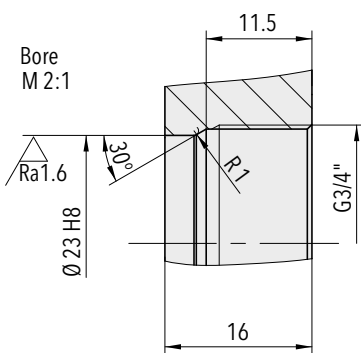

8472.XX.XX52.XX.XX.XX

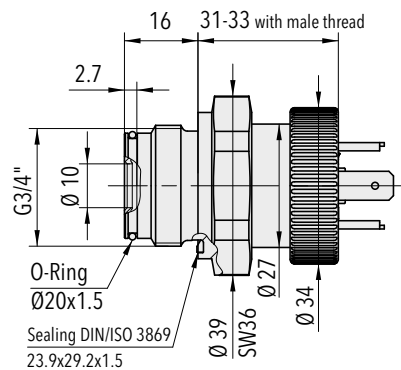

Welding flange for G3/4" frontal membrane (1.4301)  
Ordering No. C27805



# INDUSTRIAL PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The economic pressure transmitter ECT 8473 is based on the tried and true ECT line of transmitters with the wide media temperature range from -25 to 125°C. The enhanced accuracy and the low pressure ranges down to 100 mbar in combination with a comprehensive set of features, materials and options makes the ECT 8473 pressure transmitter an ideal and versatile solution suitable for a wide variety of applications.



## Applications

- Machine tools
- Hydraulics
- Water treatment

## Features

- Economical
- Good media compatibility
- Relative or absolute pressure measurement
- Titanium version optional
- Frontal membrane optional

| Technical Data      |   |                      |  |
|---------------------|---|----------------------|--|
| Measuring principle | Thick film on ceramic   | Accuracy @ 25°C typ. | ± 0.3 % FS typ.<br>(± 0.5 % FS typ., ± 1 % FS typ.)  |
| Measuring range     | 0 ... 0.1 to 0 ... 40 bar<br>0 ... 1.5 to 0 ... 500 psi                         | Media temperature    | -25°C ... +125°C   |
| Output signal       | 4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC,<br>0 ... 10 VDC, 0.5 ... 4.5 VDC ratiom. | Ambient temperature  | -25°C ... +85°C<br>Cable PVC 22: -5°C ... +60°C<br>Cable PUR 24: -20°C ... +70°C<br>Cable Raychem 08: -20°C ... +100°C |

Subject to change

## Ordering information/type code

|  |   |                                    |                             | 8473 . XX  | XX        | XX   | XX   | XX        | XX        |
|--|---|------------------------------------|-----------------------------|--|-----------|------|------|-----------|-----------|
| <b>Measuring range <sup>1)</sup></b>   | <b>Pressure measurement range [bar]</b>   | <b>Over pressure [bar]</b>         | <b>Burst pressure [bar]</b> |  |           |      |      |           |           |
|  | 0 ... 0.1   | 1.2                                | 2                           | <b>66</b>  | 0 ... 1.5 | 15   | 30   | <b>F6</b> |           |
|  | 0 ... 0.16  | 1.2                                | 2                           | <b>67</b>  | 0 ... 2   | 15   | 30   | <b>F7</b> |           |
|  | 0 ... 0.2   | 1.2                                | 2                           | <b>68</b>  | 0 ... 2.5 | 15   | 30   | <b>F8</b> |           |
|  | 0 ... 0.4   | 1.2                                | 2                           | <b>69</b>  | 0 ... 5   | 15   | 30   | <b>F9</b> |           |
|  | 0 ... 0.6   | 2                                  | 3                           | <b>70</b>  | 0 ... 7.5 | 30   | 45   | <b>G0</b> |           |
|  | 0 ... 1.0   | 2                                  | 3                           | <b>71</b>  | 0 ... 15  | 30   | 45   | <b>G1</b> |           |
|  | 0 ... 1.6   | 3.2                                | 4.8                         | <b>73</b>  | 0 ... 20  | 40   | 60   | <b>G3</b> |           |
|  | 0 ... 2.5   | 5                                  | 7.5                         | <b>75</b>  | 0 ... 30  | 60   | 90   | <b>G5</b> |           |
|  | 0 ... 4   | 8                                  | 12                          | <b>76</b>  | 0 ... 50  | 100  | 150  | <b>G6</b> |           |
|  | 0 ... 6   | 12                                 | 15                          | <b>77</b>  | 0 ... 100 | 200  | 250  | <b>G7</b> |           |
|  | 0 ... 10  | 20                                 | 25                          | <b>78</b>  | 0 ... 150 | 300  | 375  | <b>G8</b> |           |
|  | 0 ... 16  | 32                                 | 40                          | <b>79</b>  | 0 ... 250 | 500  | 625  | <b>G9</b> |           |
|  | 0 ... 25  | 50                                 | 75                          | <b>80</b>  | 0 ... 400 | 800  | 1200 | <b>H0</b> |           |
|  | 0 ... 40  | 80                                 | 100                         | <b>81</b>  | 0 ... 500 | 1000 | 1250 | <b>H1</b> |           |
| <b>Sensor</b>  | Relative pressure, Material pressure connection and housing: 1.4305 (AISI303)                       |                                    | <b>54</b>                   | Absolute pressure, Material pressure connection and housing: 1.4305 (AISI303) <sup>2) 3)</sup>         |           |      |      | <b>84</b> |           |
|  | Relative pressure, Material pressure connection and housing: 1.4404/1.4435 (AISI316L) <sup>2)</sup> |                                    | <b>56</b>                   | Absolute pressure, Material pressure connection and housing: 1.4404/1.4435 (AISI316L) <sup>2) 3)</sup> |           |      |      | <b>86</b> |           |
|  | Relative pressure, Material pressure connection and housing: 1.4462 (AISI318LN) <sup>2)</sup>       |                                    | <b>50</b>                   | Absolute pressure, Material pressure connection and housing: 1.4462 (AISI318LN) <sup>2) 3)</sup>       |           |      |      | <b>80</b> |           |
|  | Relative pressure, titanium grade 5 <sup>2)</sup>   |                                    | <b>51</b>                   | Absolute pressure, titanium grade 5 <sup>2) 3)</sup>   |           |      |      | <b>81</b> |           |
|  |   |                                    |                             |  |           |      |      |           |           |
| <b>Pressure connection</b>   | G1/4" female  |                                    |                             |  |           |      |      |           | <b>10</b> |
|  | G1/4" male  |                                    |                             |  |           |      |      |           | <b>17</b> |
|  | G1/2" male DIN3852-A <sup>2)</sup>  |                                    |                             |  |           |      |      |           | <b>21</b> |
|  | G1/2" male DIN3852-E <sup>2)</sup>  |                                    |                             |  |           |      |      |           | <b>41</b> |
|  | 1/4" NPT male, ANSI B1.20.1 <sup>2)</sup>   |                                    |                             |  |           |      |      |           | <b>30</b> |
|  | 1/8" NPT male, ANSI B1.20.1 <sup>10)</sup>  |                                    |                             |  |           |      |      |           | <b>43</b> |
|  | 7/16" -20UNF male SAE4 <sup>2) 8)</sup>   |                                    |                             |  |           |      |      |           | <b>42</b> |
|  | R1/4" male, DIN3858   |                                    |                             |  |           |      |      |           | <b>19</b> |
|  | G3/4" frontal membrane <sup>2) 4)</sup>   |                                    |                             |  |           |      |      |           | <b>52</b> |
| <b>Electrical connection</b>   | Male electrical plug EN 175301-803-A, Mat. PA   |                                    |                             |  |           |      |      |           | <b>05</b> |
|  | Male electrical plug M12x1, 5-pole, Mat. PA (Old shape), Mat. PBT (New shape)                       |                                    |                             |  |           |      |      |           | <b>35</b> |
|  | Male electrical plug industrial standard (contact distance 9.4 mm) Mat. PBT                         |                                    |                             |  |           |      |      |           | <b>01</b> |
|  | Male electrical plug Packard Metri Pack, Mat. PBT <sup>9)</sup>                                     |                                    |                             |  |           |      |      |           | <b>51</b> |
|  | Cable PUR, cable gland PA 6-3, -20°C ... +70°C <sup>5) 4)</sup>                                     |                                    |                             |  |           |      |      |           | <b>24</b> |
|  | Cable PVC, cable gland PA 6-3, -5°C ... +60°C <sup>5) 6) 9)</sup>                                   |                                    |                             |  |           |      |      |           | <b>22</b> |
|  | Cable Raychem, cable gland PA 6-3, -20°C ... +100°C <sup>5) 6) 9)</sup>                             |                                    |                             |  |           |      |      |           | <b>08</b> |
| Cable IP68, Mat. PVC, max. 3m, Medium +10°C ... +35°C, Pmax. 1 bar rel./abs. (old version) |   |                                    |                             |  |           |      |      | <b>68</b> |           |
| <b>Output signal</b>   | <b>Signal output</b>  | <b>Load resistance</b>             | <b>I (supply)</b>           | <b>U (supply)</b>  |           |      |      |           |           |
|  | 4 ... 20 mA   | (U <sub>supply</sub> -9 V) / 20 mA |                             | 9 ... 30 VDC   |           |      |      |           | <b>19</b> |
|  | 0 ... 5 VDC   | ≥ 2.5 kΩ                           | ≤ 10 mA                     | 10 ... 30 VDC  |           |      |      |           | <b>14</b> |
|  | 1 ... 6 VDC   | ≥ 5.0 kΩ                           | ≤ 10 mA                     | 10 ... 30 VDC  |           |      |      |           | <b>16</b> |
|  | 0 ... 10 VDC  | ≥ 5.0 kΩ                           | ≤ 10 mA                     | 15 ... 30 VDC  |           |      |      |           | <b>17</b> |
|  | 0.5 ... 4.5 VDC   | ≥ 5.0 kΩ                           | ≤ 10 mA                     | 5 VDC ± 0.25 VDC ratiom.   |           |      |      |           | <b>23</b> |

# ECT 0.3 % (0.5 %, 1.0 %) 8473

8473 . XX XX XX XX XX XX

|                    |  |    |
|--------------------|--|----|
| <b>Accessories</b> | Seal FKM (-20°C ... +125°C)  | 61 |
|                    | Seal CR ≤ 100 bar (-25°C ... +100°C) <sup>7)</sup>   | 62 |
|                    | Seal EPDM (-25°C ... +125°C)   | 63 |
|                    | Pressure peak damping element ø 1.0 mm (for pressure connections 17 and 30)  | 40 |
|                    | Pressure peak damping element ø 0.3 mm (for pressure connections 17 and 30)  | 43 |
|                    | Pressure peak damping element ø 0.5 mm (for pressure connections 17 and 30)  | 45 |
|                    | Female electrical connector EN 175301-803-A (DIN43650-A)   | 58 |
|                    | Female electrical plug M12x1, 5-pole   | 33 |
|                    | Female electrical connector industrial standard  | 34 |
|                    | Special electrical connection: Pin 1 + , Pin 2 -<br>(only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A)                  | 92 |
|                    | Special electrical connection: Pin 1 Out , Pin 2 -, Pin 3 +<br>(only for output 14, 16, 17, 23 and male electrical plug EN175301-803-A / DIN43650-A)           | 98 |
|                    | Special electrical connection: Pin 1 + , Pin 2 -, Pin 3 Out<br>(only for output signals 14, 16, 17, 23 and male electrical plug EN 175301-803-A / DIN 43650-A) | 97 |
|                    | Special electrical connection: Pin 1 + , Pin 3 -<br>(only for output 4 ... 20 mA and male electrical plug Packard Metri Pack 3-poles)                          | E4 |
|                    | Special electrical connection: Pin 1 + , Pin 2 Out Pin 3 -<br>(only for output signals 14, 16, 17, 23 and male electrical plug Packard Metri Pack 3-poles)     | 99 |
|                    | Cable length 1.5 m   | 1M |
|                    | Cable length 3.0 m   | 3M |
|                    | Cable length 5.0 m   | 5M |
|                    | Housing nut for electrical connection EN175301-803-A (DIN43650-A) secured with Loctite (max. 85°C)   | L9 |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Please ask us

<sup>3)</sup> Only for ranges: ≥ 400 mbar or 5 psi

<sup>4)</sup> Not for sensors 54 and 84, only for pressure ranges ≤ 10 bar or 150 psi

<sup>5)</sup> Cable length see accessories (max. length 50 m, in 5-meter sections)

<sup>6)</sup> Protection IP68: Immersion depth max. 3 m, Media +10°C ... +35°C

<sup>7)</sup> Only for pressure connections 10 and 30

<sup>8)</sup> According to norm J1926, max. 35 MPa

<sup>9)</sup> Pressure ranges > 16 bar (Pressure ranges ≤ 16 bar upon request)

<sup>10)</sup> Only for sensors 56 and 86 and electrical connections 01, 35, 51 (others on request)



Identical construction for refrigeration:  
Data sheet No. H72323

## Standard products (extra short lead time)


| Product No. | Type Code                          | Pressure range [bar] | Over pressure max. [bar] | Pressure connection    | Signal output | Accuracy @ 25°C typ. [%] |
|-------------|------------------------------------|----------------------|--------------------------|------------------------|---------------|--------------------------|
| ECT0.1A     | 8473 66 5417 05 0000 0000 19 58 61 | 0 ... 0.1            | 2                        | G1/4" male             | 4 ... 20 mA   | 1.0                      |
| ECT0.2A     | 8473 68 5417 05 0000 0000 19 58 61 | 0 ... 0.2            | 2                        | G1/4" male             | 4 ... 20 mA   | 0.5                      |
| ECT0.4A     | 8473 69 5417 05 0000 0000 19 58 61 | 0 ... 0.4            | 2                        | G1/4" male             | 4 ... 20 mA   | 0.5                      |
| ECT0.6A     | 8473 70 5417 05 0000 0000 19 58 61 | 0 ... 0.6            | 2                        | G1/4" male             | 4 ... 20 mA   | 0.3                      |
| ECT0.1V     | 8473 66 5417 05 0000 0000 17 58 61 | 0 ... 0.1            | 2                        | G1/4" male             | 0 ... 10 VDC  | 1.0                      |
| ECT0.2V     | 8473 68 5417 05 0000 0000 17 58 61 | 0 ... 0.2            | 2                        | G1/4" male             | 0 ... 10 VDC  | 0.5                      |
| ECT0.4V     | 8473 69 5417 05 0000 0000 17 58 61 | 0 ... 0.4            | 2                        | G1/4" male             | 0 ... 10 VDC  | 0.5                      |
| ECT0.6V     | 8473 70 5417 05 0000 0000 17 58 61 | 0 ... 0.6            | 2                        | G1/4" male             | 0 ... 10 VDC  | 0.3                      |
| ECTF0.1A    | 8473 66 5652 05 0000 0000 19 58 61 | 0 ... 0.1            | 2                        | G3/4" frontal membrane | 4 ... 20 mA   | 1.0                      |
| ECTF0.2A    | 8473 68 5652 05 0000 0000 19 58 61 | 0 ... 0.2            | 2                        | G3/4" frontal membrane | 4 ... 20 mA   | 0.5                      |
| ECTF0.4A    | 8473 69 5652 05 0000 0000 19 58 61 | 0 ... 0.4            | 2                        | G3/4" frontal membrane | 4 ... 20 mA   | 0.5                      |
| ECTF0.6A    | 8473 70 5652 05 0000 0000 19 58 61 | 0 ... 0.6            | 2                        | G3/4" frontal membrane | 4 ... 20 mA   | 0.3                      |
| ECTF1.0A    | 8473 71 5652 05 0000 0000 19 58 61 | 0 ... 1              | 2                        | G3/4" frontal membrane | 4 ... 20 mA   | 0.3                      |
| ECTF1.6A    | 8473 73 5652 05 0000 0000 19 58 61 | 0 ... 1.6            | 3.2                      | G3/4" frontal membrane | 4 ... 20 mA   | 0.3                      |
| ECTF2.5A    | 8473 75 5652 05 0000 0000 19 58 61 | 0 ... 2.5            | 5                        | G3/4" frontal membrane | 4 ... 20 mA   | 0.3                      |
| ECTF4.0A    | 8473 76 5652 05 0000 0000 19 58 61 | 0 ... 4              | 8                        | G3/4" frontal membrane | 4 ... 20 mA   | 0.3                      |
| ECTF6.0A    | 8473 77 5652 05 0000 0000 19 58 61 | 0 ... 6              | 12                       | G3/4" frontal membrane | 4 ... 20 mA   | 0.3                      |
| ECTF10.0A   | 8473 78 5652 05 0000 0000 19 58 61 | 0 ... 10             | 20                       | G3/4" frontal membrane | 4 ... 20 mA   | 0.3                      |

| Specifications         |  |  |
|------------------------|--|--|
| <b>Electrical Data</b> | Output / supply voltage  | 4 ... 20 mA: 24 (9 ... 30) VDC<br>0 ... 5 VDC: 24 (10 ... 30) VDC<br>1 ... 6 VDC: 24 (10 ... 30) VDC<br>0 ... 10 VDC: 24 (15 ... 30) VDC<br>0.5 ... 4.5 VDC: 5 VDC ratiom. |
|                        | Rise time  | Typ. 1 ms / 10 ... 90 % nominal pressure   |
|                        | Switch-on-delay  | Max. 1.5 s   |
|                        | Inverse-polarity protection, short-circuit strenght @ 25°C during 5 min. | 4...20 mA: to $U_s = 30$ VDC<br>0...10 VDC, 0...5 VDC, 1...6 VDC: to $U_s = 30$ VDC<br>0.5...4.5 VDC ratiometric: to $U_s = 5.25$ VDC                                      |
|                        | <b>Environmental conditions</b>  |  |
|                        | Media temperature  | -25°C ... +125°C   |
|                        | Ambient temperature  | -25°C ... +85°C<br>Cable PVC 22: -5°C ... +60°C<br>Cable PUR 24: -20°C ... +70°C<br>Cable Raychem 08: -20°C ... +100°C   |
|                        | Protection <sup>1)</sup>   | IP65, IP67, IP68   |
|                        | Humidity   | Max. 95 % relative   |
|                        | Vibration  | 4 g (10...2000 Hz)   |
|                        | Shock  | 50 g / 8 ms  |
| <b>EMC Protection</b>  | Emission   | EN/IEC 61000-6-3   |
|                        | Immunity   | EN/IEC 61000-6-2   |
| <b>Mechanical Data</b> | Sensor (wetted parts)  | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)   |
|                        | Pressure connection (wetted parts)                                       | 54/84: 1.4305 (AISI303)<br>56/86: 1.4404/1.4435 (AISI316L)<br>50/80: 1.4462 (AISI318LN)<br>51/81: Titanium Grade 5   |
|                        | Housing  | 54/84: 1.4305 (AISI303)<br>56/86: 1.4404/1.4435 (AISI316L)<br>50/80: 1.4462 (AISI318LN)<br>51/81: Titanium Grade 5   |
|                        | Sealing  | FKM 70 Sh, CR, EPDM  |
|                        | Male electrical plug   | See ordering information   |
|                        | Weight   | ~ 110 g  |
|                        | Mounting torque  | 15 ... 20 Nm   |


<sup>1)</sup> See electrical connection

| Accuracy                           |               |             |           |            |
|------------------------------------|---------------|-------------|-----------|------------|
| <b>Pressure measuring range</b>    | <b>[bar]</b>  | > 0 ... 0.4 | 0 ... 0.2 | 0 ... 0.1  |
|                                    |               |             | 0 ... 0.4 | 0 ... 0.16 |
|                                    | <b>[psi]</b>  | > 0 ... 5   | 0 ... 2.5 | 0 ... 1.5  |
|                                    |               |             | 0 ... 5   | 0 ... 2    |
| TEB @ -25 ... +85°C                | [% FS typ.]   | ± 1.0       | ± 2.0     | ± 3.0      |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.3       | ± 0.5     | ± 1.0      |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2       | ± 0.3     | ± 0.3      |
| TC zero point and span             | [% FS/K typ.] | ± 0.02      | ± 0.02    | ± 0.02     |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.2       | ± 0.2     | ± 0.2      |


## Measuring accuracy 1.0 %

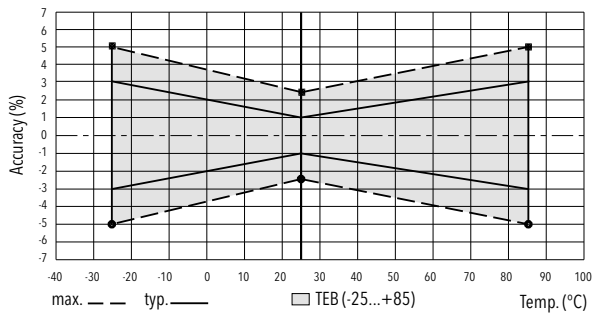

## Measuring accuracy 0.5 %

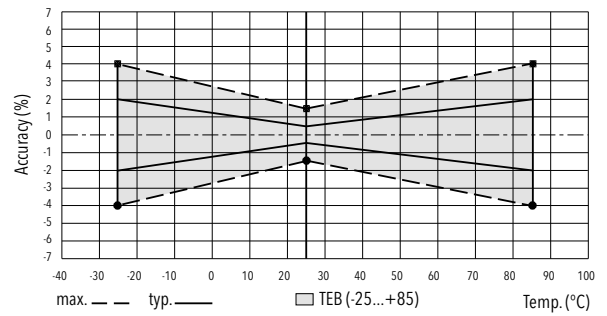

## Measuring accuracy 0.3 %

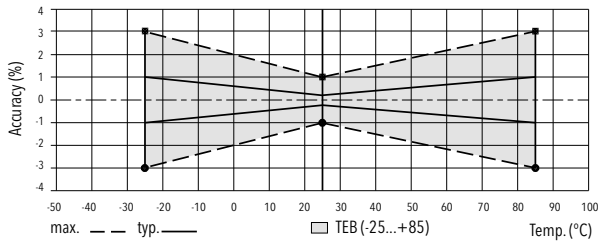

## Electrical connection

|               |   | Protection / electrical connection       |                     |                                     |   |                          |                     |       |
|---------------|---|--|---------------------|-------------------------------------|---|--------------------------|---------------------|-------|
|               |   | IP65*)                                   | IP67*)              | IP67*)                              | IP65  | IP67/IP68 max. 3m        | IP68 max. 3 m       |       |
|               |   | Industrial standard<br>EN175301-803A **) | M12x1 **)<br>5-pole | Packard<br>Metri Pack **)<br>3-pole | Industrial standard<br>Contact distance<br>9.4 mm **) | Cable**) <b>24/22/68</b> | Cable **) <b>08</b> |       |
|               |   | <b>05</b>                                | <b>35</b>           | <b>51</b>                           | <b>01</b>   |                          |                     |       |
|               |   |  |                     |                                     |   |                          |                     |       |
| Output signal | <p><b>8473.xx.xxxx.xx.19</b></p>          | Standard                                 | <b>92</b>           |                                     | <b>E4</b>   |                          |                     |       |
|               | <p><b>8473.xx.xxxx.xx.14/16/17/23</b></p> | Standard                                 | <b>98</b>           | <b>97</b>                           | <b>99</b>   |                          |                     |       |
|               |   | 2  | 1                   | 4                                   | 1   | 2                        | white               | red   |
|               |   | 1  | 2                   | 1                                   | 2   | 1                        | brown               | black |
|               |   | ⊕  | ⊕                   | 5                                   | ⊕   | ⊕                        | yellow              | green |
|               |   | 2  | 3                   | 1                                   | 1   | 1                        | white               | red   |
|               |   | 3  | 1                   | 2                                   | 1   | 2                        | green               | white |
|               |   | 1  | 2                   | 2                                   | 2   | 3                        | brown               | black |
|               |   | ⊕  | ⊕                   | 5                                   | ⊕   | ⊕                        | yellow              | green |

\*) Provided female connector is mounted according to instructions

\*\*) Ventilation via male electric plug/cable end

\*\*\*) Only cable versions or female electrical plug with shield connection

### Additional information

#### Documents

Data sheet

[www.trafag.com/H72326](http://www.trafag.com/H72326)


Instructions

[www.trafag.com/H73324](http://www.trafag.com/H73324)


Flyer

[www.trafag.com/H70663](http://www.trafag.com/H70663)


## Dimensions




8473.XX.XXXX.05.XX.XX



8473.XX.XXXX.35.XX.XX Old shape

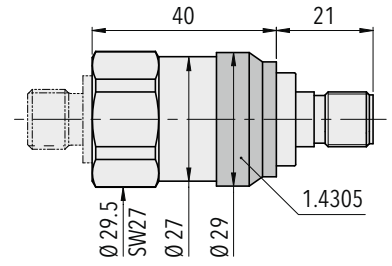


8473.XX.XXXX.35.XX.XX New shape

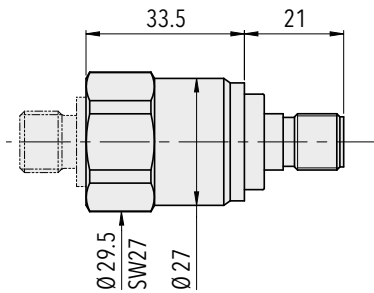


8473.XX.X717.35.XX.XX

8473.XX.X942.35.XX.XX

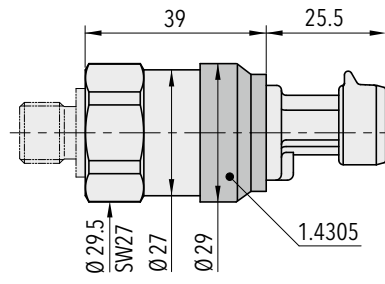


8473.XX.XXXX.51.XX.XX

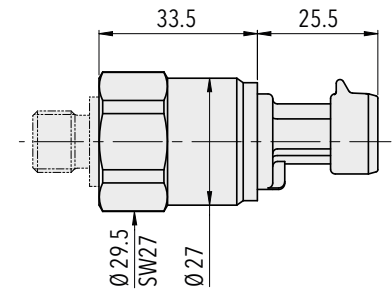


8473.XX.X717.51.XX.XX

8473.XX.X942.51.XX.XX

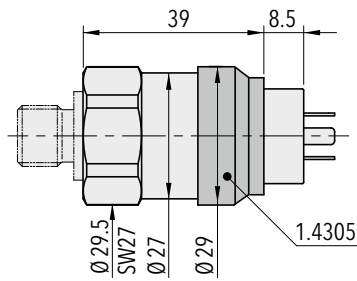


8473.XX.XXXX.01.XX.XX




8473.XX.X717.01.XX.XX

8473.XX.X942.01.XX.XX

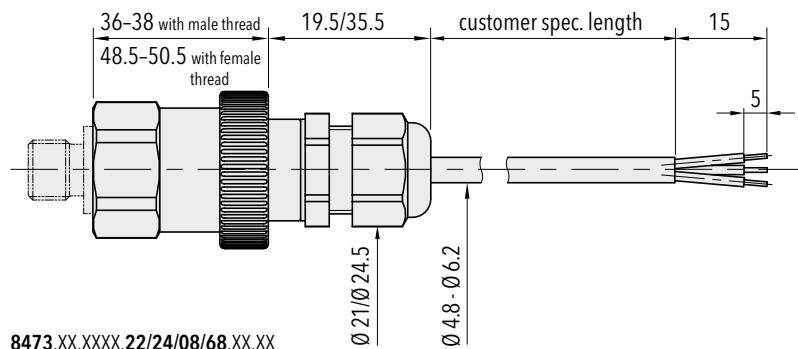


8473.XX.XXXX.22/24/08/68.XX.XX


## Dimensions




8473.XX.XX10.XX.XX.XX




8473.XX.XX17.XX.XX.XX




8473.XX.XX21.XX.XX.XX




8473.XX.XX41.XX.XX.XX




8473.XX.XX30.XX.XX.XX




8473.XX.X643.XX.XX.XX





8473.XX.XX42.XX.XX.XX




8473.XX.XX19.XX.XX.XX

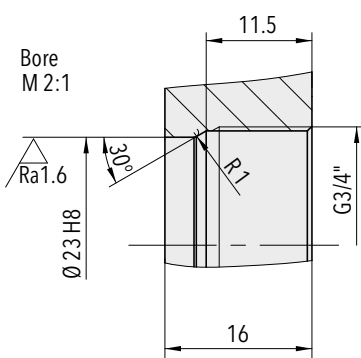

8473.XX.XX52.XX.XX.XX

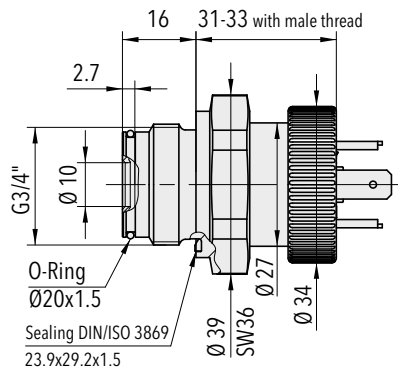


Welding flange for G3/4" frontal membrane (1.4301)  
Ordering No. C27805




1) Tightening torque 50...60Ncm

8473.XX.XXXX.XX.XX.58



8473.XX.XXXX.XX.XX.33



8473.XX.XXXX.XX.XX.34

# MARINE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The economic pressure transmitter ECTN 8477 is based on the tried and true ECT line of transmitters. The wide media temperature range from -25 to 85°C in combination with a comprehensive set of features and options makes the ECTN 8477 pressure transmitter a versatile solution suitable for marine applications.



## Applications

- Shipbuilding
- Engine manufacturing

## Features

- Economical
- Good media compatibility
- Relative or absolute pressure measurement
- Titanium version optional

| Technical Data       |  |                       |  |
|----------------------|--|-----------------------|--|
| Measuring principle  | Thick film on ceramic                                  | Media temperature     | -25°C ... +85°C<br>400 bar/5000 psi: -10°C ... +85°C |
| Measuring range      | 0 ... 1 to 0 ... 400 bar<br>0 ... 15 to 0 ... 5000 psi | Ambient temperature   | -25°C ... +85°C                                      |
| Output signal        | 4 ... 20 mA  | Approval / conformity | DNV-GL, KRS, RINA                                    |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ.  |                       |  |

Subject to change



## Ordering information/type code

|  |   |                                    |                             | 8477 . XX         | XX                          | XX    | XX    | XX        | XX        |
|--|---|------------------------------------|-----------------------------|-------------------|-----------------------------|-------|-------|-----------|-----------|
| <b>Measuring range <sup>1)</sup></b>                 | <b>Pressure measurement range [bar]</b>   | <b>Over pressure [bar]</b>         | <b>Burst pressure [bar]</b> |                   |                             |       |       |           |           |
|  | 0 ... 1.0   | 2                                  | 3                           | <b>71</b>         | 0 ... 15                    | 30    | 45    | <b>G1</b> |           |
|  | 0 ... 1.6   | 3.2                                | 4.8                         | <b>73</b>         | 0 ... 20                    | 40    | 70    | <b>G3</b> |           |
|  | 0 ... 2.5   | 5                                  | 7.5                         | <b>75</b>         | 0 ... 30                    | 60    | 90    | <b>G5</b> |           |
|  | 0 ... 4   | 8                                  | 12                          | <b>76</b>         | 0 ... 50                    | 100   | 150   | <b>G6</b> |           |
|  | 0 ... 6   | 12                                 | 15                          | <b>77</b>         | 0 ... 100                   | 200   | 250   | <b>G7</b> |           |
|  | 0 ... 10  | 20                                 | 25                          | <b>78</b>         | 0 ... 150                   | 300   | 375   | <b>G8</b> |           |
|  | 0 ... 16  | 32                                 | 40                          | <b>79</b>         | 0 ... 250                   | 500   | 625   | <b>G9</b> |           |
|  | 0 ... 25  | 50                                 | 75                          | <b>80</b>         | 0 ... 400                   | 800   | 1200  | <b>H0</b> |           |
|  | 0 ... 40  | 80                                 | 100                         | <b>81</b>         | 0 ... 500                   | 1000  | 1250  | <b>H1</b> |           |
|  | 0 ... 60  | 120                                | 180                         | <b>82</b>         | 0 ... 1000                  | 2000  | 3000  | <b>H2</b> |           |
|  | 0 ... 100 <sup>4)</sup>   | 200                                | 300                         | <b>83</b>         | 0 ... 1500 <sup>4)</sup>    | 3000  | 4500  | <b>H3</b> |           |
|  | 0 ... 160 <sup>4)</sup>   | 320                                | 480                         | <b>85</b>         | 0 ... 2000 <sup>4)</sup>    | 4000  | 6000  | <b>H5</b> |           |
|  | 0 ... 250 <sup>4)</sup>   | 500                                | 750                         | <b>74</b>         | 0 ... 3000 <sup>4)</sup>    | 6000  | 9000  | <b>G4</b> |           |
|  | 0 ... 400 <sup>2) 4)</sup>  | 800                                | 1000                        | <b>84</b>         | 0 ... 5000 <sup>2) 4)</sup> | 10000 | 12500 | <b>H4</b> |           |
|  | <b>Sensor</b>   | Relative pressure, 1.4404/1.4435   |                             |                   |                             |       |       |           |           |
| Relative pressure, 1.4462 <sup>4)</sup>              |   |                                    |                             |                   |                             |       |       | <b>52</b> |           |
| Relative pressure, titanium grade 5 <sup>4)</sup>    |   |                                    |                             |                   |                             |       |       | <b>53</b> |           |
| Absolute pressure, 1.4404/1.4435 <sup>3)</sup>       |   |                                    |                             |                   |                             |       |       | <b>89</b> |           |
| Absolute pressure, 1.4462 <sup>3) 4)</sup>           |   |                                    |                             |                   |                             |       |       | <b>82</b> |           |
| Absolute pressure, titanium grade 5 <sup>3) 4)</sup> |   |                                    |                             |                   |                             |       |       | <b>83</b> |           |
| <b>Pressure connection</b>                           | G1/4" female <sup>4)</sup>  |                                    |                             |                   |                             |       |       |           | <b>10</b> |
|  | G1/4" male  |                                    |                             |                   |                             |       |       |           | <b>17</b> |
|  | G1/2" male DIN3852-A <sup>4)</sup>  |                                    |                             |                   |                             |       |       |           | <b>21</b> |
|  | G1/2" male DIN3852-E <sup>4)</sup>  |                                    |                             |                   |                             |       |       |           | <b>41</b> |
|  | 1/4" NPT male <sup>4)</sup>   |                                    |                             |                   |                             |       |       |           | <b>30</b> |
| <b>Electrical connection</b>                         | Male electrical plug EN 175301-803-A, Mat. PA   |                                    |                             |                   |                             |       |       |           | <b>05</b> |
| <b>Output signal</b>                                 | <b>Signal output</b>  | <b>Load resistance</b>             | <b>I (supply)</b>           | <b>U (supply)</b> |                             |       |       |           |           |
|  | 4 ... 20 mA   | (U <sub>supply</sub> -9 V) / 20 mA |                             | 9 ... 30 VDC      | <b>19</b>                   |       |       |           |           |
| <b>Accessories</b>                                   | Seal FKM (-20°C ... +125°C)   |                                    |                             |                   |                             |       |       |           | <b>61</b> |
|  | Seal EPDM (-25°C ... +125°C)  |                                    |                             |                   |                             |       |       |           | <b>63</b> |
|  | Female electrical connector EN 175301-803-A (DIN43650-A)                                  |                                    |                             |                   |                             |       |       |           | <b>58</b> |
|  | Pressure peak damping element ø 0.4 mm  |                                    |                             |                   |                             |       |       |           | <b>44</b> |
|  | Pressure peak damping element ø 1.0 mm (for pressure connections 17 and 30)               |                                    |                             |                   |                             |       |       |           | <b>40</b> |
|  | Special electrical connection: Pin 1 + , Pin 2 -  |                                    |                             |                   |                             |       |       |           |           |
|  | (only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A) |                                    |                             |                   |                             |       |       |           | <b>92</b> |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Media -10°C ... +85°C

<sup>3)</sup> Absolute ranges max. 40 bar

<sup>4)</sup> Upon request


## Standard products (extra short lead time)

| Product No. | Type Code                          | Pressure range [bar] | Over pressure max. [bar] | Signal output | Supply [VDC] |
|-------------|------------------------------------|----------------------|--------------------------|---------------|--------------|
| ECTN1.0A    | 8477 71 5917 05 0000 0000 19 58 61 | 0 ... 1              | 2                        | 4 ... 20 mA   | 9 ... 30     |
| ECTN2.5A    | 8477 75 5917 05 0000 0000 19 58 61 | 0 ... 2.5            | 5                        | 4 ... 20 mA   | 9 ... 30     |
| ECTN4.0A    | 8477 76 5917 05 0000 0000 19 58 61 | 0 ... 4              | 8                        | 4 ... 20 mA   | 9 ... 30     |
| ECTN6.0A    | 8477 77 5917 05 0000 0000 19 58 61 | 0 ... 6              | 12                       | 4 ... 20 mA   | 9 ... 30     |
| ECTN10.0A   | 8477 78 5917 05 0000 0000 19 58 61 | 0 ... 10             | 20                       | 4 ... 20 mA   | 9 ... 30     |
| ECTN16.0A   | 8477 79 5917 05 0000 0000 19 58 61 | 0 ... 16             | 32                       | 4 ... 20 mA   | 9 ... 30     |
| ECTN25.0A   | 8477 80 5917 05 0000 0000 19 58 61 | 0 ... 25             | 50                       | 4 ... 20 mA   | 9 ... 30     |
| ECTN40.0A   | 8477 81 5917 05 0000 0000 19 58 61 | 0 ... 40             | 80                       | 4 ... 20 mA   | 9 ... 30     |


| Specifications                  |  |   |
|---------------------------------|--|---|
| <b>Accuracy</b>                 | TEB typ. @ -25 ... +85°C   | ± 3.0 % FS typ.   |
|                                 | Accuracy @ 25°C typ.   | ± 0.5 % FS typ.   |
|                                 | NLH @ 25°C (BSL) typ.  | ± 0.2 % FS typ.   |
|                                 | TC zero point and span typ.  | ± 0.03 % FS/K typ.  |
|                                 | Long term stability 1 year typ.  | ± 0.3 % FS typ.   |
| <b>Electrical Data</b>          | Output / supply voltage  | 4 ... 20 mA: 24 (9 ... 30) VDC  |
|                                 | Rise time  | Typ. 1 ms / 10 ... 90 % nominal pressure  |
|                                 | Switch-on-delay  | 100 ms  |
|                                 | Inverse-polarity protection, short-circuit strenght @ 25°C during 5 min. | 4...20 mA: to $U_s = 30$ VDC  |
| <b>Environmental conditions</b> | Media temperature  | -25°C ... +85°C<br>400 bar/5000 psi: -10°C ... +85°C                                    |
|                                 | Ambient temperature  | -25°C ... +85°C   |
|                                 | Protection <sup>1)</sup>   | min. IP65   |
|                                 | Humidity   | Max. 95 % relative  |
|                                 | Vibration  | 20 g (10...2000 Hz)   |
|                                 | Shock  | 50 g / 3 ms   |
| <b>EMC Protection</b>           | Emission   | EN/IEC 61000-6-3  |
|                                 | Immunity   | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)  | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)  |
|                                 | Pressure connection (wetted parts)                                       | 59/89: 1.4404/1.4435 (AISI316L)<br>52/82: 1.4462 (AISI318LN)<br>53/83: Titanium Grade 5 |
|                                 | Housing  | 59/89: 1.4404/1.4435 (AISI316L)<br>52/82: 1.4462 (AISI318LN)<br>53/83: Titanium Grade 5 |
|                                 | Sealing  | FKM 70 Sh, EPDM   |
|                                 | Male electrical plug   | See ordering information  |
|                                 | Weight   | ~ 110 g   |
|                                 | Mounting torque  | 15...20 Nm  |

<sup>1)</sup> See electrical connection


## Measuring accuracy 0.5 %

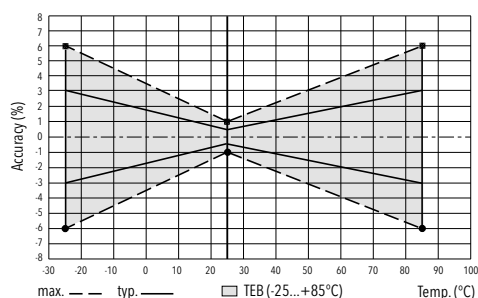


## Dimensions




8477.XX.XXXX.05.XX.XX




8477.XX.XX10.XX.XX.XX




8477.XX.XX17.XX.XX.XX




8477.XX.XX21.XX.XX.XX



8477.XX.XX41.XX.XX.XX





8477.XX.XX30.XX.XX.XX



1) Tightening torque 50...60Ncm

8477.XX.XXXX.XX.XX.58

## Electrical connection
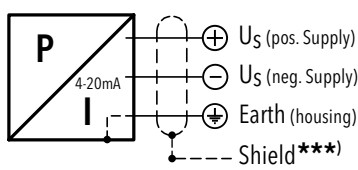
|               |  | Protection / electrical connection   |                          |
|---------------|--|--|--------------------------|
|               |  | IP65 <sup>*)</sup>   |                          |
|               |  | Industrial standard<br>EN175301-803A<br><b>05</b><br> |                          |
| Output signal |  <p><b>8477.xx.xxxx.xx.19</b></p> | Standard   | with accessory <b>92</b> |
|               |  | 2<br>1<br>⊕  | 1<br>2<br>⊕              |

<sup>\*)</sup> Provided female connector is mounted according to instructions

<sup>\*\*\*)</sup> Only cable versions or female electrical plug with shield connection

### Additional information

| Documents |              |  |
|-----------|--------------|--|
|           | Data sheet   | <a href="http://www.trafag.com/H72322">www.trafag.com/H72322</a> |
|           | Instructions | <a href="http://www.trafag.com/H73324">www.trafag.com/H73324</a> |
|           | Flyer        | <a href="http://www.trafag.com/H70688">www.trafag.com/H70688</a> |

# RAILWAY PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Railways

## Features

- Dielectrical strength: 710 VDC, meets EN 50155 (Railways)
- Measuring ranges from 100 mbar
- Relative or absolute pressure measurement
- Frontal membrane optional

| Technical Data       |  |                       |  |
|----------------------|--|-----------------------|--|
| Measuring principle  | Thick film on ceramic                                    | Media temperature     | -25°C ... +125°C                                   |
| Measuring range      | 0 ... 0.1 to 0 ... 60 bar<br>0 ... 1.5 to 0 ... 1000 psi | Ambient temperature   | -25°C ... +125°C                                   |
| Output signal        | 4 ... 20 mA  | Approval / conformity | EN 50155 (Railway)<br>EN 45545-2 (Fire protection) |
| Accuracy @ 25°C typ. | ± 0.3 % FS typ.<br>(± 0.5 % FS typ., ± 1 % FS typ.)      |                       |  |

Subject to change

## Ordering information/type code

|  |  |   |                             | 8478 .            | XX   | XX  | XX | XX | XX        |
|--|--|---|-----------------------------|-------------------|--|---|----|----|-----------|
| <b>Measuring range <sup>1)</sup></b>   | <b>Pressure measurement range [bar]</b>  | <b>Over pressure [bar]</b>  | <b>Burst pressure [bar]</b> |                   |  |   |    |    |           |
|  | 0 ... 0.1  | 1.2   | 2                           | <b>66</b>         |  |   |    |    |           |
|  | 0 ... 0.16   | 1.2   | 2                           | <b>67</b>         |  |   |    |    |           |
|  | 0 ... 0.2  | 1.2   | 2                           | <b>68</b>         |  |   |    |    |           |
|  | 0 ... 0.4  | 1.2   | 2                           | <b>69</b>         |  |   |    |    |           |
|  | 0 ... 0.6  | 2   | 3                           | <b>70</b>         |  |   |    |    |           |
|  | 0 ... 1.0  | 2   | 3                           | <b>71</b>         |  |   |    |    |           |
|  | 0 ... 1.6  | 3.2   | 4.8                         | <b>73</b>         |  |   |    |    |           |
|  | 0 ... 2.5  | 5   | 7.5                         | <b>75</b>         |  |   |    |    |           |
|  | 0 ... 4  | 8   | 12                          | <b>76</b>         |  |   |    |    |           |
|  | 0 ... 6  | 12  | 15                          | <b>77</b>         |  |   |    |    |           |
|  | 0 ... 10   | 20  | 25                          | <b>78</b>         |  |   |    |    |           |
|  | 0 ... 16   | 32  | 40                          | <b>79</b>         |  |   |    |    |           |
|  | 0 ... 25   | 50  | 75                          | <b>80</b>         |  |   |    |    |           |
|  | 0 ... 40   | 80  | 100                         | <b>81</b>         |  |   |    |    |           |
|  | 0 ... 60   | 120   | 180                         | <b>82</b>         |  |   |    |    |           |
|  | <b>Sensor</b>  | Relative pressure, accuracy class: 0.3 %; Material pressure connection and housing: 1.4305 (AISI303) <sup>3) 5)</sup> |                             |                   | <b>54</b>  | Relative pressure, accuracy class: 0.5 %; Material pressure connection and housing: 1.4305 (AISI303) <sup>4) 5)</sup> |    |    |           |
| Relative pressure, accuracy class: 0.3 %; Material pressure connection and housing: 1.4404/1.4435 (AISI316L) <sup>3)</sup> |  |   |                             | <b>56</b>         | Relative pressure, accuracy class: 0.5 %; Material pressure connection and housing: 1.4404/1.4435 (AISI316L) <sup>4)</sup> |   |    |    | <b>59</b> |
| <b>Pressure connection</b>   | Absolute pressure, accuracy class: 0.3 %; Material pressure connection and housing: 1.4305 (AISI303) <sup>3) 5)</sup>      |   |                             | <b>84</b>         | Absolute pressure, accuracy class: 0.5 %; Material pressure connection and housing: 1.4305 (AISI303) <sup>4) 5)</sup>      |   |    |    | <b>87</b> |
|  | Absolute pressure, accuracy class: 0.3 %; Material pressure connection and housing: 1.4404/1.4435 (AISI316L) <sup>3)</sup> |   |                             | <b>86</b>         | Absolute pressure, accuracy class: 0.5 %; Material pressure connection and housing: 1.4404/1.4435 (AISI316L) <sup>4)</sup> |   |    |    | <b>89</b> |
| <b>Electrical connection</b>   | G1/4" male   |   |                             |                   |  |   |    |    | <b>17</b> |
|  | G3/4" frontal membrane <sup>2) 6)</sup>  |   |                             |                   |  |   |    |    | <b>52</b> |
| <b>Output signal</b>   | Male electrical plug EN 175301-803-A, Mat. PA  |   |                             |                   |  |   |    |    | <b>05</b> |
|  | Male electrical plug M12x1, 5-pole, Mat. PBT   |   |                             |                   |  |   |    |    | <b>35</b> |
| <b>Accessories</b>   | <b>Signal output</b>   | <b>Load resistance</b>  | <b>I (supply)</b>           | <b>U (supply)</b> |  |   |    |    |           |
|  | 4 ... 20 mA  | (U <sub>supply</sub> -9 V) / 20 mA  |                             | 9 ... 30 VDC      |  |   |    |    | <b>19</b> |
| <b>Accessories</b>   | Seal FKM (-20°C ... +125°C)  |   |                             |                   |  |   |    |    | <b>61</b> |
|  | Seal CR (-25°C ... +100°C)   |   |                             |                   |  |   |    |    | <b>62</b> |
|  | Seal EPDM (-25°C ... +125°C)   |   |                             |                   |  |   |    |    | <b>63</b> |
|  | Pressure peak damping element ø 1.0 mm (for pressure connection 17)  |   |                             |                   |  |   |    |    | <b>41</b> |
|  | Pressure peak damping element ø 0.4 mm (for pressure connection 17)  |   |                             |                   |  |   |    |    | <b>44</b> |
|  | Female electrical connector EN 175301-803-A (DIN43650-A)   |   |                             |                   |  |   |    |    | <b>58</b> |
|  | Female electrical plug M12x1, 5-pole   |   |                             |                   |  |   |    |    | <b>33</b> |
|  | Special electrical connection: Pin 1 +, Pin 2 - (for male electrical plug EN175301-803-A / DIN43650-A)                     |   |                             |                   |  |   |    |    | <b>92</b> |
|  | Special electrical connection: Pin 1 +, Pin 3 -, Pin 5 Ground (for male electrical plug 35, M12x1, 5-pole)                 |   |                             |                   |  |   |    |    | <b>94</b> |
|  | Housing nut for electrical connection EN175301-803-A (DIN43650-A) secured with Loctite (max. 85°C)                         |   |                             |                   |  |   |    |    | <b>L9</b> |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Upon request

<sup>3)</sup> Max. 40 bar or 500 psi

<sup>4)</sup> ≥ 1 bar

<sup>5)</sup> Only with pressure connection 17 (1.4305)

<sup>6)</sup> Only for pressure ranges ≤ 10 bar or 150 psi

| Specifications                  |  |  |
|---------------------------------|--|--|
| <b>Electrical Data</b>          | Output / supply voltage  | 4 ... 20 mA: 24 (9 ... 30) VDC   |
|                                 | Rise time  | Typ. 1 ms / 10 ... 90 % nominal pressure   |
|                                 | Switch-on-delay  | 100 ms   |
|                                 | Inverse-polarity protection, short-circuit strength @ 25°C during 5 min. | 4...20 mA: to $U_s = 30$ VDC   |
| <b>Environmental conditions</b> | Media temperature  | -25°C ... +125°C   |
|                                 | Ambient temperature  | -25°C ... +125°C   |
|                                 | Protection <sup>1)</sup>   | IP65, IP67   |
|                                 | Humidity   | Max. 95 % relative   |
|                                 | Vibration  | 15 g RMS (20...2000 Hz) (EN60068-2-64)<br>25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C) (EN60068-2-6) |
|                                 | Shock  | 50 g / 11 ms<br>100 g / 6 ms Male electrical plug M12x1 (EN60068-2-27) <sup>3)</sup>                     |
| <b>EMC Protection</b>           | Emission   | EN/IEC 61000-6-3<br>EN50121-3-2  |
|                                 | Immunity   | EN/IEC 61000-6-2<br>EN50121-3-2 <sup>2)</sup>  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)  | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)   |
|                                 | Pressure connection (wetted parts)                                       | 1.4404 (AISI316L)  |
|                                 | Housing  | 1.4404/1.4435 (AISI316L)   |
|                                 | Sealing  | FKM 70 Sh, CR, EPDM  |
|                                 | Male electrical plug   | See ordering information   |
|                                 | Weight   | ~ 110 g  |
|                                 | Mounting torque  | 15 ... 20 Nm   |

<sup>1)</sup> See electrical connection


<sup>2)</sup> Surge voltage on shield, shield connected on both sides

<sup>3)</sup> For electrical connection 35


| Accuracy                           |               |                     |             |                     |            |
|------------------------------------|---------------|---------------------|-------------|---------------------|------------|
|                                    |               | Sensors 57/87/59/89 |             | Sensors 54/84/56/86 |            |
| <b>Pressure measuring range</b>    | <b>[bar]</b>  | ≥ 0 ... 1           | > 0 ... 0.4 | 0 ... 0.2           | 0 ... 0.1  |
|                                    | <b>[psi]</b>  | ≥ 0 ... 15          | > 0 ... 5   | 0 ... 0.4           | 0 ... 0.16 |
|                                    |               |                     |             | 0 ... 2.5           | 0 ... 1.5  |
|                                    |               |                     |             | 0 ... 5             | 0 ... 2    |
| TEB @ -25 ... +85°C                | [% FS typ.]   | ± 3.0               | ± 1.0       | ± 2.0               | ± 3.0      |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.5               | ± 0.3       | ± 0.5               | ± 1.0      |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2               | ± 0.2       | ± 0.3               | ± 0.3      |
| TC zero point and span             | [% FS/K typ.] | ± 0.03              | ± 0.02      | ± 0.02              | ± 0.02     |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.3               | ± 0.2       | ± 0.2               | ± 0.2      |




## Sensors 54/84/56/86 0 ... 0.1 to 0 ... 0.16 bar

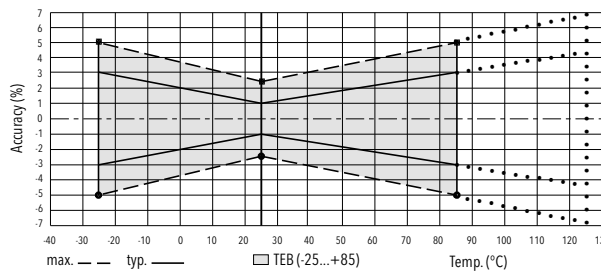


## Sensors 54/84/56/86 0 ... 0.2 to 0 ... 0.4 bar

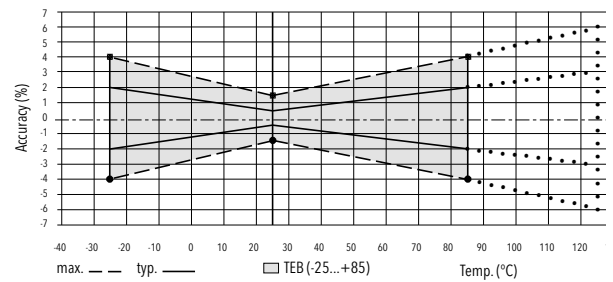

## Sensors 54/84/56/86 > 0 ... 0.40 bar

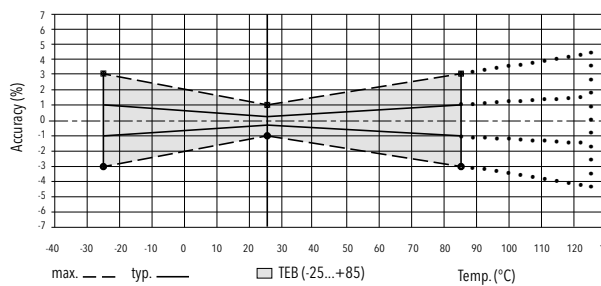

## Sensors 57/87/59/89 ≥ 0 ... 1 bar

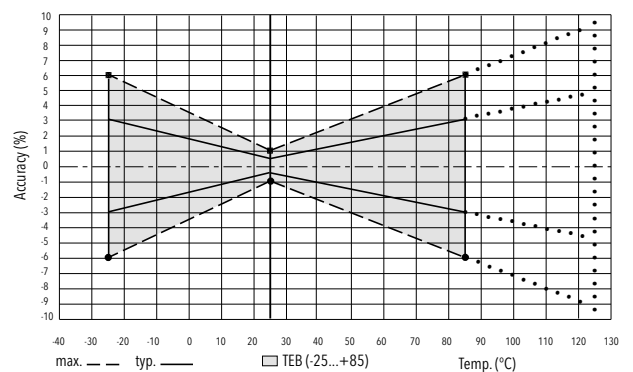

### Additional specifications railways


|                          |  |                        |  |
|--------------------------|--|------------------------|--|
| Environmental conditions | Cold   | EN 60068-2-1           | Ab: -25°C, 2 h (not in operation)<br>Ae: -25°C, 1 h (in operation) |
|                          | Dry heat   | EN 60068-2-2           | Be: 85°C, 6 h (in operation)                                       |
|                          | Damp heat, cyclical  | EN 60068-2-30          | Db: 55°C, variant 1, 2 cycles (2 x 24 h)                           |
|                          | Vibration and shock  | EN 61373               | Vibration: category 3<br>Shock: category 3 <sup>1) 3)</sup>        |
|                          | Dielectrical strength  | EN 50155               | 710 VDC  |
| Supply                   | Resistance of insulation                                     | EN 50155               | >100 MΩ, 500 VDC   |
|                          | Behavior in case of fire (electrical connections 01, 32, 35) | EN 45545-2             | Weight: < 10 g<br>Surface: < 0.2 m <sup>2</sup>                    |
|                          | Nominal voltage  | EN 50155 <sup>2)</sup> | 24 V   |
| Supply                   | Interruptions of the voltage supply                          | EN 50155 <sup>2)</sup> | Class S1   |
|                          | Switching between two supply voltages                        | EN 50155 <sup>2)</sup> | Class C1   |

<sup>1)</sup> In Category 3 the 2010 versions' higher severity levels apply in each case


<sup>2)</sup> Chapter 5.1 Voltage supply

<sup>3)</sup> Male electrical plug EN 175301-803-A, cat. 2


## Dimensions




8478.XX.XXXX.05.XX.XX

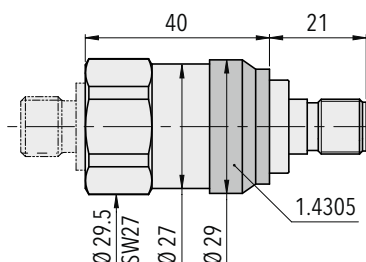


8478.XX.XXXX.35.XX.XX

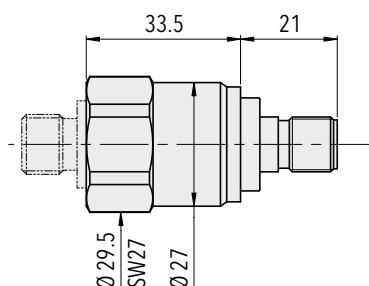



8478.XX.X717.35.XX.XX




8478.XX.XX17.XX.XX.XX

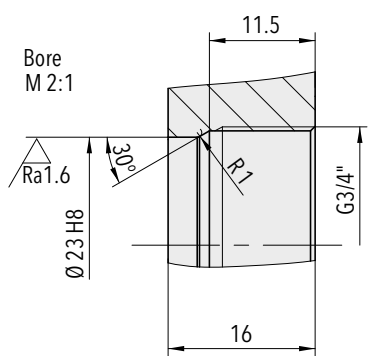

8478.XX.XX52.XX.XX.XX

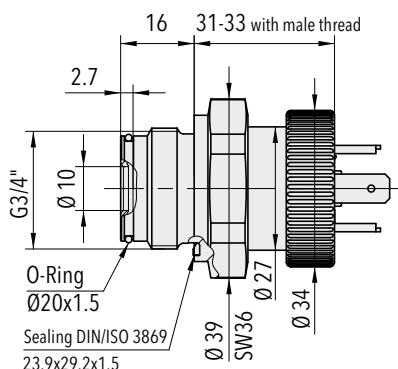


Welding flange for G3/4" frontal membrane (1.4301) Ordering No. C27805






1) Tightening torque 50...60Ncm

8478.XX.XXXX.XX.XX.58



8478.XX.XXXX.XX.XX.33

## Electrical connection
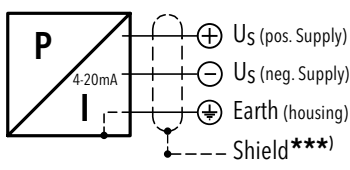
|                           |   | Protection / electrical connection  |           |  |           |
|---------------------------|---|---|-----------|--|-----------|
|                           |   | IP65 <sup>*)</sup>  |           | IP67 <sup>*)</sup>   |           |
|                           |   | Industrial standard<br>EN175301-803A  |           | M12x1<br>5-pole  |           |
|                           |   | <b>05</b>   |           | <b>35</b>  |           |
|                           |   |  |           |  |           |
| Output signal             |  <p> <math>U_S</math> (pos. Supply)<br/> <math>U_S</math> (neg. Supply)<br/>                     Earth (housing)<br/>                     Shield<sup>***)</sup> </p> | Standard  | <b>92</b> | Standard   | <b>94</b> |
|                           |   | 2   | 1         | 4  | 1         |
|                           |   | 1   | 2         | 1  | 3         |
|                           |   | ⊕   | ⊕         | 5  | 5         |
| <b>8478.XX.XXXX.XX.19</b> |   |   |           |  |           |

<sup>\*)</sup> Provided female connector is mounted according to instructions

<sup>\*\*)</sup> Ventilation via male electric plug/cable end

<sup>\*\*\*)</sup> Only cable versions or female electrical plug with shield connection

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72337">www.trafag.com/H72337</a> |
| Instructions | <a href="http://www.trafag.com/H73324">www.trafag.com/H73324</a> |
| Flyer        | <a href="http://www.trafag.com/H70604">www.trafag.com/H70604</a> |

# INDUSTRIAL PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The industrial pressure transmitter EPI 8287 features the extremely robust and stable thin-film-on-steel sensor element from its well-proven predecessor EPI 8297. In combination with the new inhouse developed ASIC TX it offers a wide temperature range up to 125°C and triple overpressure safety which makes it the perfect solution for a wide range of demanding applications.



## Applications

- Machine tools
- Hydraulics
- Industrial applications

## Features

- Excellent long-term stability
- High resistance to over pressure
- Completely welded steel sensor system without additional seals
- Compact design
- Different accuracy classes

| Technical Data      |   |                      |  |
|---------------------|---|----------------------|--|
| Measuring principle | Thin film on steel  | Accuracy @ 25°C typ. | ± 0.5 % FS typ.<br>± 0.3 % FS typ.   |
| Measuring range     | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi                            | Media temperature    | -40°C ... +125°C   |
| Output signal       | 4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC,<br>0 ... 10 VDC, 0.5 ... 4.5 VDC ratiometric | Ambient temperature  | -40°C ... +125°C<br>Cable PVC: -5°C ... +60°C<br>Cable PUR: -20°C ... +70°C<br>Cable Raychem: -20°C ... +100°C |

Subject to change

## Ordering information/type code

|   |   |                              |                             | 8287 . XX                               | XX                         | XX                          | XX    | XX | XX |
|---|---|------------------------------|-----------------------------|---|----------------------------|-----------------------------|-------|----|----|
| <b>Measuring range</b> <sup>1)</sup>  | <b>Pressure measurement range [bar]</b>   | <b>Over pressure [bar]</b>   | <b>Burst pressure [bar]</b> | <b>Pressure measurement range [psi]</b> | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |       |    |    |
|   | 0 ... 2.5   | 7.5                          | 50                          | 75                                      | 0 ... 30                   | 90                          | 700   | G5 |    |
|   | 0 ... 4   | 12                           | 60                          | 76                                      | 0 ... 50                   | 150                         | 850   | G6 |    |
|   | 0 ... 6   | 18                           | 100                         | 77                                      | 0 ... 100                  | 300                         | 1450  | G7 |    |
|   | 0 ... 10  | 30                           | 200                         | 78                                      | 0 ... 150                  | 450                         | 2500  | G8 |    |
|   | 0 ... 16  | 48                           | 200                         | 79                                      | 0 ... 200                  | 600                         | 2500  | GA |    |
|   | 0 ... 25  | 75                           | 300                         | 80                                      | 0 ... 250                  | 750                         | 2500  | G9 |    |
|   | 0 ... 40  | 120                          | 300                         | 81                                      | 0 ... 300                  | 900                         | 4000  | HA |    |
|   | 0 ... 60  | 180                          | 400                         | 82                                      | 0 ... 400                  | 1200                        | 4000  | H0 |    |
|   | 0 ... 100   | 300                          | 500                         | 83                                      | 0 ... 500                  | 1500                        | 4000  | H1 |    |
|   | 0 ... 160   | 480                          | 750                         | 85                                      | 0 ... 1000                 | 3000                        | 5000  | H2 |    |
|   | 0 ... 250   | 750                          | 1000                        | 74                                      | 0 ... 1500                 | 4500                        | 7000  | H3 |    |
|   | 0 ... 400   | 1000                         | 2000                        | 84                                      | 0 ... 2000                 | 6000                        | 10000 | H5 |    |
|   | 0 ... 600   | 1500                         | 2500                        | 86                                      | 0 ... 3000                 | 9000                        | 14500 | G4 |    |
|   | <b>Option 5P:</b>   | <b>Fivefold overpressure</b> |                             |   | 0 ... 5000                 | 12500                       | 21750 | H4 |    |
|   | 0 ... 2.5   | 12.5                         | 60                          | 55                                      | 0 ... 7500                 | 18750                       | 29000 | H6 |    |
|   | 0 ... 4   | 20                           | 100                         | 56                                      |                            |                             |       |    |    |
|   | 0 ... 6   | 30                           | 200                         | 57                                      |                            |                             |       |    |    |
|   | 0 ... 10  | 50                           | 200                         | 58                                      |                            |                             |       |    |    |
|   | 0 ... 16  | 80                           | 300                         | 59                                      |                            |                             |       |    |    |
|   | 0 ... 25  | 125                          | 300                         | 60                                      |                            |                             |       |    |    |
|   | 0 ... 40  | 200                          | 400                         | 61                                      |                            |                             |       |    |    |
|   | 0 ... 60  | 300                          | 500                         | 62                                      |                            |                             |       |    |    |
|   | 0 ... 100   | 500                          | 750                         | 63                                      |                            |                             |       |    |    |
| 0 ... 160   | 800   | 1000                         | 65                          |   |                            |                             |       |    |    |
| <b>Sensor</b>   | Relative pressure, accuracy: 0.5 %; Material pressure connection and housing: 1.4542 (AISI630)                      |                              |                             |   |                            |                             | 25    |    |    |
|   | Relative pressure, accuracy: 0.5 %; Material pressure connection and housing: 1.4404 (AISI316L) <sup>2) 3) 5)</sup> |                              |                             |   |                            |                             | 35    |    |    |
|   | Relative pressure, accuracy: 0.3 %; Material pressure connection and housing: 1.4542 (AISI630)                      |                              |                             |   |                            |                             | 23    |    |    |
|   | Relative pressure, accuracy: 0.3 %; Material pressure connection and housing: 1.4404 (AISI316L) <sup>2) 3) 5)</sup> |                              |                             |   |                            |                             | 33    |    |    |
| <b>Pressure connection</b>  | G1/4" female <sup>2)</sup>  |                              |                             |   |                            |                             | 10    |    |    |
|   | G1/4" male (Seal)   |                              |                             |   |                            |                             | 17    |    |    |
|   | R1/4" male, DIN3858 <sup>2)</sup>   |                              |                             |   |                            |                             | 19    |    |    |
|   | G1/2" male (Manometer) <sup>2)</sup>  |                              |                             |   |                            |                             | 11    |    |    |
|   | 1/4" NPT male   |                              |                             |   |                            |                             | 30    |    |    |
|   | 1/2" NPT male <sup>2)</sup>   |                              |                             |   |                            |                             | 51    |    |    |
|   | M14x1.5 male DIN6149-2 <sup>2)</sup>  |                              |                             |   |                            |                             | 31    |    |    |
|   | 7/16"-20UNF male, DIN3866 <sup>2) 6)</sup>  |                              |                             |   |                            |                             | 18    |    |    |
|   | 7/16"-20UNF male SAE4 (J1926) <sup>2) 7)</sup>  |                              |                             |   |                            |                             | 42    |    |    |
| 7/16"-20UNF female SAE J512 with valve opener <sup>6)</sup>                             |   |                              |                             |   |                            | 24                          |       |    |    |
| <b>Electrical connection</b>  | Male electrical plug EN 175301-803-A, Mat. PA   |                              |                             |   |                            |                             | 05    |    |    |
|   | Male electrical plug M12x1, 5-pole, Mat. PBT  |                              |                             |   |                            |                             | 35    |    |    |
|   | Male electrical plug Packard Metri Pack, Mat. PBT <sup>4)</sup>   |                              |                             |   |                            |                             | 51    |    |    |
|   | Male electrical plug industrial standard, contact distance 9.4 mm, Mat. PBT   |                              |                             |   |                            |                             | 01    |    |    |
|   | Cable PUR, IP68 (Screwed cable gland PA 6-3), -20°C ... +70°C <sup>8) 9)</sup>                                      |                              |                             |   |                            |                             | 24    |    |    |
|   | Cable PVC, IP68 (Screwed cable gland PA 6-3), -5°C ... +60°C <sup>8) 9) 10)</sup>                                   |                              |                             |   |                            |                             | 22    |    |    |
| Cable Raychem, IP68 (Screwed cable gland PA 6-3), -20°C ... +100°C <sup>8) 9) 10)</sup> |   |                              |                             |   |                            | 08                          |       |    |    |

| Output signal      | Signal output  | Load resistance                    | I (supply) | U (supply)            |    |
|--------------------|--|------------------------------------|------------|-----------------------|----|
|                    | 4 ... 20 mA  | (U <sub>supply</sub> -9 V) / 20 mA |            | 9 ... 32 VDC          | 19 |
|                    | 0 ... 5 VDC  | > 2.5 kΩ                           | < 10 mA    | 9 ... 32 VDC          | 14 |
|                    | 1 ... 6 VDC  | > 5.0 kΩ                           | < 10 mA    | 9 ... 32 VDC          | 16 |
|                    | 0 ... 10 VDC   | > 5.0 kΩ                           | < 10 mA    | 15 ... 32 VDC         | 17 |
|                    | 0.5 ... 4.5 VDC ratiometric  | > 5.0 kΩ                           | < 10 mA    | 5 (4.75 ... 5.25) VDC | 23 |
| <b>Accessories</b> | Seal FPM, -18°C ... +125°C <sup>3)</sup>   |                                    |            |                       | 61 |
|                    | Seal EPDM, -40°C ... +125°C <sup>3)</sup>  |                                    |            |                       | 63 |
|                    | Seal NBR, -25°C ... +100°C <sup>3)</sup>   |                                    |            |                       | 83 |
|                    | Pressure peak damping element ø 1.0 mm (for pressure connections 17, 19, 30, 31, 51)   |                                    |            |                       | 40 |
|                    | Pressure peak damping element ø 0.4 mm (for pressure connections 17, 19, 30, 31, 51)   |                                    |            |                       | 44 |
|                    | Female electrical connector EN 175301-803-A (DIN43650-A)   |                                    |            |                       | 58 |
|                    | Female electrical plug M12x1, 5-pole   |                                    |            |                       | 33 |
|                    | Female electrical connector industrial standard  |                                    |            |                       | 34 |
|                    | Special electrical connection: Pin 1 + , Pin 2 -<br>(only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A)          |                                    |            |                       | 92 |
|                    | Special electrical connection: Pin 1 Out , Pin 2 - , Pin 3 +<br>(only for output 14, 16, 17 and male electrical plug EN175301-803-A / DIN43650-A)      |                                    |            |                       | 98 |
|                    | Special electrical connection: Pin 1 + , Pin 2 - , Pin 3 Out<br>(only for output 14, 16, 17 and male electrical plug EN175301-803-A / DIN43650-A)      |                                    |            |                       | 97 |
|                    | Special electrical connection: Pin 1 + , Pin 3 -<br>(only for output 4 ... 20 mA and male electrical plug Packard Metri Pack 3-poles)                  |                                    |            |                       | E4 |
|                    | Special electrical connection: Pin 1 + , Pin 2 out Pin 3 -<br>(only for output signals 14, 16, 17 and male electrical plug Packard Metri Pack 3-poles) |                                    |            |                       | 99 |
|                    | Housing nut for electrical connection EN175301-803-A (DIN43650-A) secured with Loctite (max. 85°C)   |                                    |            |                       | L9 |
|                    | Cable length 1.5 m   |                                    |            |                       | 1M |
|                    | Cable length 3.0 m   |                                    |            |                       | 3M |
|                    | Cable length 5.0 m   |                                    |            |                       | 5M |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> Upon request

<sup>3)</sup> Only with pressure connection 17 (G1/4")

<sup>4)</sup> Pressure ranges > 16 bar (Pressure ranges ≤ 16 bar upon request)

<sup>5)</sup> Only for pressure ranges ≥ 10 bar

<sup>6)</sup> Max. allowable pressure range 60 bar at 120 bar overpressure

<sup>7)</sup> According to norm J1926, max. 35 MPa

<sup>8)</sup> Cable length see accessories (max. length 50 m, in 5-meter sections)

<sup>9)</sup> IP68, max. 3 m, Media +10°C ... +35°C

<sup>10)</sup> Cable length max. 3 m, for pressure ranges ≤ 16 bar

## Standard products (extra short lead time)

| Product No. | Type Code                             | Pressure range<br>[bar] | Over pressure<br>max.<br>[bar] | Signal output | Supply<br>[VDC] |
|-------------|---------------------------------------|-------------------------|--------------------------------|---------------|-----------------|
| EPI4.0A     | 8287 76 2517 05 0000 0000 19 44 58 61 | 0 ... 4                 | 12                             | 4 ... 20 mA   | 9 ... 32        |
| EPI6.0A     | 8287 77 2517 05 0000 0000 19 44 58 61 | 0 ... 6                 | 18                             | 4 ... 20 mA   | 9 ... 32        |
| EPI10.0A    | 8287 78 2517 05 0000 0000 19 44 58 61 | 0 ... 10                | 30                             | 4 ... 20 mA   | 9 ... 32        |
| EPI16.0A    | 8287 79 2517 05 0000 0000 19 44 58 61 | 0 ... 16                | 48                             | 4 ... 20 mA   | 9 ... 32        |
| EPI25.0A    | 8287 80 2517 05 0000 0000 19 44 58 61 | 0 ... 25                | 75                             | 4 ... 20 mA   | 9 ... 32        |
| EPI40.0A    | 8287 81 2517 05 0000 0000 19 44 58 61 | 0 ... 40                | 120                            | 4 ... 20 mA   | 9 ... 32        |
| EPI60.0A    | 8287 82 2517 05 0000 0000 19 44 58 61 | 0 ... 60                | 180                            | 4 ... 20 mA   | 9 ... 32        |
| EPI100.0A   | 8287 83 2517 05 0000 0000 19 44 58 61 | 0 ... 100               | 300                            | 4 ... 20 mA   | 9 ... 32        |
| EPI250.0A   | 8287 74 2517 05 0000 0000 19 44 58 61 | 0 ... 250               | 750                            | 4 ... 20 mA   | 9 ... 32        |
| EPI400.0A   | 8287 84 2517 05 0000 0000 19 44 58 61 | 0 ... 400               | 1000                           | 4 ... 20 mA   | 9 ... 32        |
| EPI600.0A   | 8287 86 2517 05 0000 0000 19 44 58 61 | 0 ... 600               | 1500                           | 4 ... 20 mA   | 9 ... 32        |
| EPI4.0V     | 8287 76 2517 05 0000 0000 17 44 58 61 | 0 ... 4                 | 12                             | 0 ... 10 VDC  | 15 ... 32       |
| EPI6.0V     | 8287 77 2517 05 0000 0000 17 44 58 61 | 0 ... 6                 | 18                             | 0 ... 10 VDC  | 15 ... 32       |
| EPI10.0V    | 8287 78 2517 05 0000 0000 17 44 58 61 | 0 ... 10                | 30                             | 0 ... 10 VDC  | 15 ... 32       |
| EPI16.0V    | 8287 79 2517 05 0000 0000 17 44 58 61 | 0 ... 16                | 48                             | 0 ... 10 VDC  | 15 ... 32       |
| EPI25.0V    | 8287 80 2517 05 0000 0000 17 44 58 61 | 0 ... 25                | 75                             | 0 ... 10 VDC  | 15 ... 32       |
| EPI40.0V    | 8287 81 2517 05 0000 0000 17 44 58 61 | 0 ... 40                | 120                            | 0 ... 10 VDC  | 15 ... 32       |
| EPI60.0V    | 8287 82 2517 05 0000 0000 17 44 58 61 | 0 ... 60                | 180                            | 0 ... 10 VDC  | 15 ... 32       |
| EPI100.0V   | 8287 83 2517 05 0000 0000 17 44 58 61 | 0 ... 100               | 300                            | 0 ... 10 VDC  | 15 ... 32       |
| EPI250.0V   | 8287 74 2517 05 0000 0000 17 44 58 61 | 0 ... 250               | 750                            | 0 ... 10 VDC  | 15 ... 32       |
| EPI400.0V   | 8287 84 2517 05 0000 0000 17 44 58 61 | 0 ... 400               | 1000                           | 0 ... 10 VDC  | 15 ... 32       |
| EPI600.0V   | 8287 86 2517 05 0000 0000 17 44 58 61 | 0 ... 600               | 1500                           | 0 ... 10 VDC  | 15 ... 32       |

| Specifications         |  |   |
|------------------------|--|---|
| <b>Electrical Data</b> | Output / supply voltage  | 4 ... 20 mA: 24 (9...32) VDC<br>0 ... 5 VDC: 24 (9...32) VDC<br>1 ... 6 VDC: 24 (9...32) VDC<br>0 ... 10 VDC: 24 (15...32) VDC<br>0.5 ... 4.5 VDC ratiometric<br>10 ... 90 % $U_{\text{supply}}$ : $5 \pm 0.25$ VDC |
|                        | Rise time  | Typ. 1 ms / 10 ... 90 % nominal pressure  |
|                        | Switch-on-delay  | 100 ms  |
|                        | Inverse-polarity protection, short-circuit strength @ 25°C during 5 min. | 4 ... 20 mA: to $U_s = 32$ VDC<br>0 ... 10 VDC, 0 ... 5 VDC, 1 ... 6 VDC: to $U_s = 28$ VDC<br>0.5 ... 4.5 VDC ratiometric: to $U_s = 14$ VDC   |
|                        | <b>Environmental conditions</b>  |   |
|                        | Media temperature  | -40°C ... +125°C  |
|                        | Ambient temperature  | -40°C ... +125°C<br>Cable PVC: -5°C ... +60°C<br>Cable PUR: -20°C ... +70°C<br>Cable Raychem: -20°C ... +100°C  |
|                        | Protection <sup>1)</sup>   | IP65, IP67, IP68  |
|                        | Humidity   | Max. 95 % relative  |
|                        | Vibration  | 15 g RMS (20...2000 Hz) acc.to EN 60068-2-64<br>25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C)<br>acc.to EN 60068-2-6   |
|                        | Shock  | 500 g / 1 ms acc.to EN 60068-2-27   |
| <b>EMC Protection</b>  | Emission   | EN/IEC 61000-6-3  |
|                        | Immunity   | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b> | Sensor (wetted parts)  | 1.4542 (AISI630)  |
|                        | Pressure connection (wetted parts)                                       | 1.4542 (AISI630) or 1.4404 (AISI316L)   |
|                        | Housing  | 1.4542 (AISI630) or 1.4404 (AISI316L)   |
|                        | Sealing  | FPM/EPDM/NBR  |
|                        | Male electrical plug   | See ordering information  |
|                        | Weight   | appr. 80 ... 110 g  |
|                        | Mounting torque  | 25 Nm   |


<sup>1)</sup> See electrical connection




## Accuracy

|                                    |               | Measuring accuracy 0.5 %<br>Ordering No. 25/35 | Measuring accuracy 0.3 %<br>Ordering No. 23/33 |
|------------------------------------|---------------|--|--|
| TEB @ -25 ... +85°C                | [% FS typ.]   | ± 1.75   | ± 1.0  |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.5  | ± 0.3  |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2  | ± 0.2  |
| TC zero point and span             | [% FS/K typ.] | ± 0.03   | ± 0.01   |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.1  | ± 0.2  |


### Measuring accuracy 0.5 %

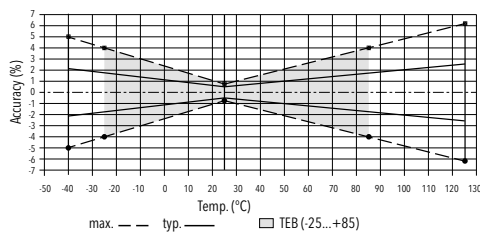


### Measuring accuracy 0.3 %

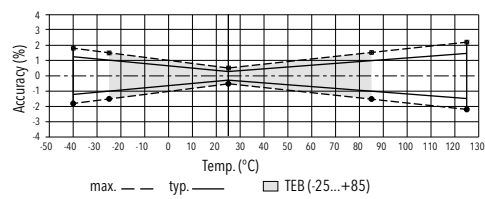


## Dimensions




8287.XX.XXXX.05.XX.XX

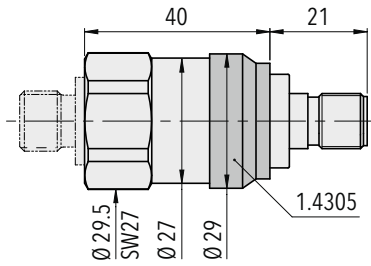


8287.XX.XXXX.35.XX.XX

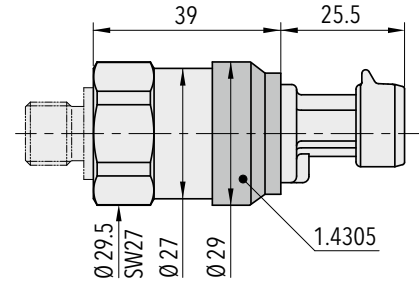


8287.XX.XXXX.51.XX.XX




8287.XX.XXXX.01.XX.XX

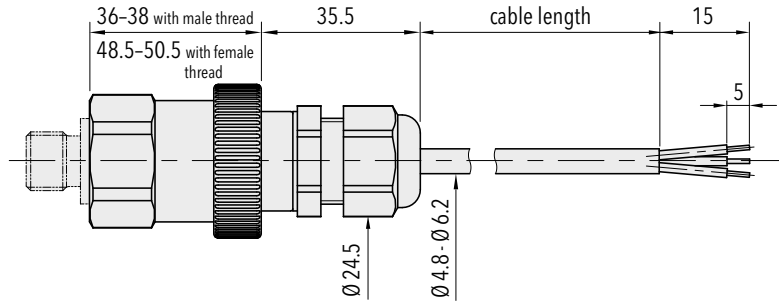


8287.XX.XXXX.24/22/08.XX.XX




8287.XX.XX10.XX.XX.XX




8287.XX.XX17.XX.XX.XX




8287.XX.XX19.XX.XX.XX




8287.XX.XX11.XX.XX.XX




8287.XX.XX30.XX.XX.XX




8287.XX.XX51.XX.XX.XX




8287.XX.XX31.XX.XX.XX




8287.XX.XX18.XX.XX.XX



8287.XX.XX42.XX.XX.XX




8287.XX.XX24.XX.XX.XX




1) Tightening torque 50...60Ncm

8287.XX.XXXX.XX.XX.58



8287.XX.XXXX.XX.XX.33



8287.XX.XXXX.XX.XX.34

## Electrical connection

|               |   | Protection / electrical connection      |                     |                                     |   |               |               |
|---------------|---|---|---------------------|-------------------------------------|---|---------------|---------------|
|               |   | IP65*)                                  | IP67*)              | IP67*)                              | IP65  | IP68 max. 3 m | IP68 max. 3 m |
|               |   | Industrial standard<br>EN175301-803A**) | M12x1 **)<br>5-pole | Packard Metri<br>Pack **)<br>3-pole | Industrial standard<br>Contact distance 9.4<br>mm **) | Cable**)      | Cable**)      |
|               |   | <b>05</b>                               | <b>35</b>           | <b>51</b>                           | <b>01</b>   | <b>24/22</b>  | <b>08</b>     |
|               |   |   |                     |                                     |   |               |               |
| Output signal | <p><b>8287.XX.XXXX.XX.19</b></p>          | Standard                                | <b>92</b>           |                                     | <b>E4</b>   |               |               |
|               | <p><b>8287.XX.XXXX.XX.14/16/17/23</b></p> | Standard                                | <b>98</b>           | <b>97</b>                           | <b>99</b>   |               |               |
|               |   |   |                     |                                     |   | white         | red           |
|               |   | 2                                       | 1                   | 4                                   | 1   | 1             | 2             |
|               |   | 1                                       | 2                   | 1                                   | 2   | 3             | 1             |
|               |   | ⊕                                       | ⊕                   | 5                                   | ⊕   | ⊕             | ⊕             |
|               |   |   |                     |                                     |   | white         | red           |
|               |   | 2                                       | 3                   | 2                                   | 1   | 1             | 1             |
|               |   | 3                                       | 1                   | 3                                   | 3   | 2             | 2             |
|               |   | 1                                       | 2                   | 2                                   | 2   | 3             | 3             |
|               |   | ⊕                                       | ⊕                   | ⊕                                   | ⊕   | ⊕             | ⊕             |
|               |   |   |                     |                                     |   | white         | red           |
|               |   |   |                     |                                     |   | green         | white         |
|               |   |   |                     |                                     |   | brown         | black         |
|               |   |   |                     |                                     |   | yellow        | green         |

\*) Provided female connector is mounted according to instructions

\*\*) Ventilation via male electric plug/cable end

\*\*\*) Only cable versions or female electrical plug with shield connection

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72317">www.trafag.com/H72317</a> |
| Instructions | <a href="http://www.trafag.com/H73317">www.trafag.com/H73317</a> |
| Flyer        | <a href="http://www.trafag.com/H70692">www.trafag.com/H70692</a> |

# MARINE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The industrial pressure transmitter EPN 8288, like its reliable predecessor the EPN 8298, has an exceptional ruggedness and a strong thin-film-on-steel sensor cell. The triple overpressure safety, a wide temperature range of up to 125°C and the marine certifications make the EPN 8288 the ideal solution for a wide variety of challenging applications.




## Applications

- Shipbuilding
- Engine manufacturing
- Machine tools
- Hydraulics




## Features

- Excellent long-term stability
- High resistance to over pressure
- Completely welded steel sensor system without additional seals
- Different accuracy classes

| Technical Data      |  |                      |                                    |
|---------------------|--|----------------------|------------------------------------|
| Measuring principle | Thin film on steel   | Accuracy @ 25°C typ. | ± 0.5 % FS typ.<br>± 0.3 % FS typ. |
| Measuring range     | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi   | Media temperature    | -40°C ... +125°C                   |
| Output signal       | 4 ... 20 mA, 0 ... 10 VDC<br>0.5 ... 4.5 VDC ratiometric  | Ambient temperature  | -40°C ... +125°C                   |

Subject to change

## Ordering information/type code


|   |  |                                    |                             |                   |   |                            | 8288 . XX                   | XX        | XX        | XX        | XX        | XX |
|---|--|------------------------------------|-----------------------------|-------------------|---|----------------------------|-----------------------------|-----------|-----------|-----------|-----------|----|
| <b>Measuring range <sup>1)</sup></b>  | <b>Pressure measurement range [bar]</b>  | <b>Over pressure [bar]</b>         | <b>Burst pressure [bar]</b> |                   | <b>Pressure measurement range [psi]</b> | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |           |           |           |           |    |
|   | 0 ... 2.5  | 7.5                                | 50                          | <b>75</b>         | 0 ... 30                                | 90                         | 700                         | <b>G5</b> |           |           |           |    |
|   | 0 ... 4  | 12                                 | 60                          | <b>76</b>         | 0 ... 50                                | 150                        | 850                         | <b>G6</b> |           |           |           |    |
|   | 0 ... 6  | 18                                 | 100                         | <b>77</b>         | 0 ... 100                               | 300                        | 1450                        | <b>G7</b> |           |           |           |    |
|   | 0 ... 10   | 30                                 | 200                         | <b>78</b>         | 0 ... 150                               | 450                        | 2500                        | <b>G8</b> |           |           |           |    |
|   | 0 ... 16   | 48                                 | 200                         | <b>79</b>         | 0 ... 200                               | 600                        | 2500                        | <b>GA</b> |           |           |           |    |
|   | 0 ... 25   | 75                                 | 300                         | <b>80</b>         | 0 ... 250                               | 750                        | 2500                        | <b>G9</b> |           |           |           |    |
|   | 0 ... 40   | 120                                | 300                         | <b>81</b>         | 0 ... 300                               | 900                        | 4000                        | <b>HA</b> |           |           |           |    |
|   | 0 ... 60   | 180                                | 400                         | <b>82</b>         | 0 ... 400                               | 1200                       | 4000                        | <b>HO</b> |           |           |           |    |
|   | 0 ... 100  | 300                                | 500                         | <b>83</b>         | 0 ... 500                               | 1500                       | 4000                        | <b>H1</b> |           |           |           |    |
|   | 0 ... 160  | 480                                | 750                         | <b>85</b>         | 0 ... 1000                              | 3000                       | 5000                        | <b>H2</b> |           |           |           |    |
|   | 0 ... 250  | 750                                | 1000                        | <b>74</b>         | 0 ... 1500                              | 4500                       | 7000                        | <b>H3</b> |           |           |           |    |
|   | 0 ... 400  | 1000                               | 2000                        | <b>84</b>         | 0 ... 2000                              | 6000                       | 10000                       | <b>H5</b> |           |           |           |    |
|   | 0 ... 600  | 1500                               | 2500                        | <b>86</b>         | 0 ... 3000                              | 9000                       | 14500                       | <b>G4</b> |           |           |           |    |
|   |  |                                    |                             |                   | 0 ... 5000                              | 12500                      | 21750                       | <b>H4</b> |           |           |           |    |
|   |  |                                    |                             |                   | 0 ... 7500                              | 18750                      | 29000                       | <b>H6</b> |           |           |           |    |
| <b>Sensor</b>   | Relative pressure, accuracy: 0.3 %; Material pressure connection and housing: 1.4542 (AISI630)   |                                    |                             |                   |   |                            |                             | <b>23</b> |           |           |           |    |
|   | Relative pressure, accuracy: 0.5 %; Material pressure connection and housing: 1.4542 (AISI630)   |                                    |                             |                   |   |                            |                             | <b>25</b> |           |           |           |    |
|   | Relative pressure, accuracy: 0.3 %; Material pressure connection and housing: 1.4404 (AISI316L) <sup>2)</sup>  |                                    |                             |                   |   |                            |                             | <b>33</b> |           |           |           |    |
|   | Relative pressure, accuracy: 0.5 %; Material pressure connection and housing: 1.4404 (AISI316L) <sup>2)</sup>  |                                    |                             |                   |   |                            |                             | <b>35</b> |           |           |           |    |
| <b>Pressure connection</b>  | G1/4" male (Seal)  |                                    |                             |                   |   |                            |                             |           | <b>17</b> |           |           |    |
|   | 1/4" NPT male <sup>3)</sup>  |                                    |                             |                   |   |                            |                             |           | <b>30</b> |           |           |    |
|   | R1/4" male, DIN3858 <sup>3)</sup>  |                                    |                             |                   |   |                            |                             |           | <b>19</b> |           |           |    |
|   | 1/2" NPT male <sup>3)</sup>  |                                    |                             |                   |   |                            |                             |           | <b>51</b> |           |           |    |
|   | M14x1.5 male DIN6149-2 <sup>3)</sup>   |                                    |                             |                   |   |                            |                             |           | <b>31</b> |           |           |    |
|   | G1/2" male (Manometer) <sup>3)</sup>   |                                    |                             |                   |   |                            |                             |           | <b>11</b> |           |           |    |
| <b>Electrical connection</b>  | Male electrical plug EN 175301-803-A, Mat. PA  |                                    |                             |                   |   |                            |                             |           |           | <b>05</b> |           |    |
| <b>Output signal</b>  | <b>Signal output</b>   | <b>Load resistance</b>             | <b>I (supply)</b>           | <b>U (supply)</b> |   |                            |                             |           |           |           |           |    |
|   | 4 ... 20 mA  | (U <sub>supply</sub> -9 V) / 20 mA |                             | 9 ... 32 VDC      |   |                            |                             |           |           | <b>19</b> |           |    |
|   | 0 ... 10 VDC   | > 5 kΩ                             | < 10 mA                     | 15 ... 32 VDC     |   |                            |                             |           |           | <b>17</b> |           |    |
| 0.5 ... 4.5 VDC ratiometric  | ≥ 15.0 kΩ  | ≤ 12 mA                            | 5 VDC ± 0.25 VDC ratiom.    |                   |   |                            |                             |           | <b>23</b> |           |           |    |
| <b>Accessories</b>  | Seal FPM, -18°C ... +125°C   |                                    |                             |                   |   |                            |                             |           |           |           | <b>61</b> |    |
|   | Seal EPDM, -40°C ... +125°C  |                                    |                             |                   |   |                            |                             |           |           |           | <b>63</b> |    |
|   | Seal NBR, -25°C ... +100°C   |                                    |                             |                   |   |                            |                             |           |           |           | <b>83</b> |    |
|   | Pressure peak damping element ø 1.0 mm (for pressure connections 17 and 30)  |                                    |                             |                   |   |                            |                             |           |           |           | <b>40</b> |    |
|   | Pressure peak damping element ø 0.4 mm (for pressure connections 17 and 30)  |                                    |                             |                   |   |                            |                             |           |           |           | <b>44</b> |    |
|   | Female electrical connector EN 175301-803-A (DIN43650-A)   |                                    |                             |                   |   |                            |                             |           |           |           | <b>58</b> |    |
|   | Special electrical connection: Pin 1 +, Pin 2 -<br>(only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A)         |                                    |                             |                   |   |                            |                             |           |           |           | <b>92</b> |    |
|   | Special electrical connection: Pin 1 out, Pin 2 -, Pin 3 +<br>(Only for output 0.5 ... 4.5 VDC and male electrical plug EN175301-803-A / DIN43650-A) |                                    |                             |                   |   |                            |                             |           |           |           | <b>98</b> |    |
|   | Special electrical connection: Pin 1 +, Pin 2 -, Pin 3 out<br>(Only for output 0.5 ... 4.5 VDC and male electrical plug EN175301-803-A / DIN43650-A) |                                    |                             |                   |   |                            |                             |           |           |           | <b>97</b> |    |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> Only for pressure ranges ≥ 0 ... 10 bar

<sup>3)</sup> Upon request

## Specifications


|                        |  |   |
|------------------------|--|---|
| <b>Electrical Data</b> | Output / supply voltage  | 4 ... 20 mA: 24 (9 ... 32) VDC<br>0 ... 10 VDC 24 (15 ... 32 VDC)<br>0.5 ... 4.5 VDC: 5 VDC ratiom.  |
|                        | Rise time  | Typ. 1 ms / 10 ... 90 % nominal pressure  |
|                        | Switch-on-delay  | 100 ms  |
|                        | Inverse-polarity protection, short-circuit strenght @ 25°C during 5 min. | 4...20 mA: to $U_s = 32$ VDC<br>0...10 VDC: to $U_s = 28$ VDC   |
|                        | <b>Environmental conditions</b>  | Media temperature   |
|                        | Ambient temperature  | -40°C ... +125°C  |
|                        | Protection <sup>1)</sup>   | IP65  |
|                        | Humidity   | Max. 95 % relative  |
|                        | Vibration  | 15 g RMS (20...2000 Hz) acc.to EN 60068-2-64<br>25 g sin (10...2000 Hz), 1 oct./min, (1x @ 25°C)<br>acc.to EN 60068-2-6   |
|                        | Shock  | 500 g / 1 ms acc.to EN 60068-2-27   |
| <b>EMC Protection</b>  | Emission   | EN/IEC 61000-6-3, IACS UR E10   |
|                        | Immunity   | EN/IEC 61000-6-2, IACS UR E10   |
| <b>Mechanical Data</b> | Sensor (wetted parts)  | 1.4542 (AISI630)  |
|                        | Pressure connection (wetted parts)                                       | 1.4542 (AISI630) or 1.4404 (AISI316L)   |
|                        | Housing  | 1.4542 (AISI630) or 1.4404 (AISI316L)   |
|                        | Sealing  | FPM/EPDM/NBR  |
|                        | Male electrical plug   | See ordering information  |
|                        | Weight   | appr. 80 ... 110 g  |
|                        | Mounting torque  | 25 Nm   |

<sup>1)</sup> See electrical connection


## Accuracy

|                                    |               | <b>Class 0.5 %</b><br>Ordering No. 25/35 | <b>Class 0.3 %</b><br>Ordering No. 23/33 |
|------------------------------------|---------------|--|--|
| TEB @ -25...+85°C                  | [% FS typ.]   | ± 1.75                                   | ± 0.5                                    |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.5                                    | ± 0.3                                    |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2                                    | ± 0.1                                    |
| TC zero point and span             | [% FS/K typ.] | ± 0.03                                   | ± 0.005                                  |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.1                                    | ± 0.1                                    |


### Class 0.5 %

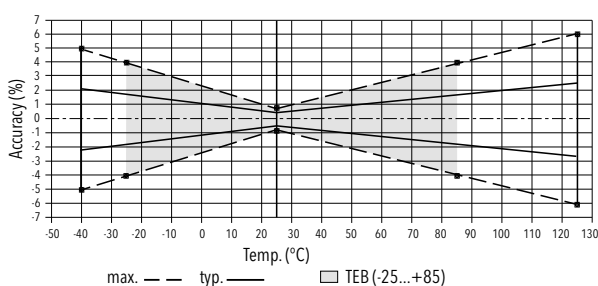


### Class 0.3 %

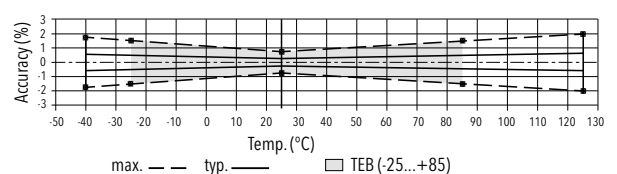


## Dimensions




8288.XX.XXXX.05.XX.XX




8288.XX.XX17.XX.XX.XX




8288.XX.XX30.XX.XX.XX




8288.XX.XX19.XX.XX.XX




8288.XX.XX51.XX.XX.XX



8288.XX.XX31.XX.XX.XX



8288.XX.XX11.XX.XX.XX



1) Tightening torque 50...60Ncm

8288.XX.XXXX.XX.XX.58

## Electrical connection

|               |                                     | Protection / electrical connection                  |                  |                  |
|---------------|-------------------------------------|---|------------------|------------------|
|               |                                     | IP65 <sup>*)</sup>                                  |                  |                  |
|               |                                     | Industrial standard<br>EN175301-803A <sup>**)</sup> |                  |                  |
|               |                                     | <b>05</b>   |                  |                  |
|               |                                     |   |                  |                  |
| Output signal | <p><b>8288.xx.xxxx.xx.19</b></p>    | Standard  | <b>92</b>        |                  |
|               |                                     | 2<br>1<br>⊕   | 1<br>2<br>⊕      |                  |
| Output signal | <p><b>8288.xx.xxxx.xx.17/23</b></p> | Standard  | <b>98</b>        | <b>97</b>        |
|               |                                     | 2<br>3<br>1<br>⊕                                    | 3<br>1<br>2<br>⊕ | 1<br>3<br>2<br>⊕ |

<sup>\*)</sup> Provided female connector is mounted according to instructions

<sup>\*\*)</sup> Ventilation via male electric plug

<sup>\*\*\*)</sup> Only female electrical plug with shield connection

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72318">www.trafag.com/H72318</a> |
| Instructions | <a href="http://www.trafag.com/H73318">www.trafag.com/H73318</a> |
| Flyer        | <a href="http://www.trafag.com/H70693">www.trafag.com/H70693</a> |



# ENGINE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The EPN pressure transmitter offers reliable and accurate pressure measurement over a wide temperature range. Its excellent long-term stability is based on the leading thin-film-on-steel sensor technology from Trafag. Its robust design makes the EPN the perfect choice for demanding applications such as marine and rail industries.



## Applications

- Shipbuilding
- Engine manufacturing
- Machine tools
- Hydraulics



## Features

- Nominal pressure up to 2500 bar (Common Rail) with high pressure threaded connection
- High vibration resistance
- Good temperature resistance
- Different accuracy classes
- Completely welded steel sensor system without additional seals

### Technical Data

|                      |  |                       |  |
|----------------------|--|-----------------------|--|
| Measuring principle  | Thin film on steel                         | Media temperature     | -40°C ... +125°C                                 |
| Measuring range      | 0 ... 2.5 to 0 ... 2500 bar                | Ambient temperature   | -40°C ... +125°C                                 |
| Output signal        | 4 ... 20 mA<br>0.5 ... 4.5 VDC ratiometric | Approval / conformity | ABS, BV, CCS, DNV, GL, KRS, LRS, NKK, RINA, RMRS |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ.<br>± 0.3 % FS typ.         |                       |  |

Subject to change

## Ordering information/type code

|                               |  |                                    |                | 8298 . XX                | XX | XX | XX | XX | XX |
|-------------------------------|--|------------------------------------|----------------|--------------------------|----|----|----|----|----|
| Measuring range <sup>1)</sup> | Pressure measurement range   | Over pressure                      | Burst pressure |                          |    |    |    |    |    |
|                               | [bar]  | [bar]                              | [bar]          |                          |    |    |    |    |    |
|                               | 0 ... 2.5  | 5                                  | 100            | 75                       |    |    |    |    |    |
|                               | 0 ... 4  | 8                                  | 100            | 76                       |    |    |    |    |    |
|                               | 0 ... 6  | 12                                 | 100            | 77                       |    |    |    |    |    |
|                               | 0 ... 10   | 20                                 | 200            | 78                       |    |    |    |    |    |
|                               | 0 ... 16   | 32                                 | 200            | 79                       |    |    |    |    |    |
|                               | 0 ... 25   | 50                                 | 300            | 80                       |    |    |    |    |    |
|                               | 0 ... 40   | 80                                 | 300            | 81                       |    |    |    |    |    |
|                               | 0 ... 60   | 120                                | 500            | 82                       |    |    |    |    |    |
|                               | 0 ... 100  | 200                                | 500            | 83                       |    |    |    |    |    |
|                               | 0 ... 160  | 320                                | 1000           | 85                       |    |    |    |    |    |
|                               | 0 ... 250  | 500                                | 1000           | 74                       |    |    |    |    |    |
|                               | 0 ... 400  | 800                                | 1500           | 84                       |    |    |    |    |    |
|                               | 0 ... 600  | 1000                               | 2000           | 86                       |    |    |    |    |    |
|                               | 0 ... 1600   | 3000                               | 4000           | 89                       |    |    |    |    |    |
|                               | 0 ... 2000   | 3000                               | 4000           | 90                       |    |    |    |    |    |
|                               | 0 ... 2500   | 3000                               | 4000           | 91                       |    |    |    |    |    |
| Sensor                        | Relative pressure, accuracy: 0.3 %   |                                    |                | 23                       |    |    |    |    |    |
|                               | Relative pressure, accuracy: 0.5 %   |                                    |                | 25                       |    |    |    |    |    |
| Pressure connection           | G1/4" male (Seal) <sup>2)</sup>  |                                    |                |                          |    |    |    | 17 |    |
|                               | R1/4" male DIN3858 <sup>2) 4)</sup>  |                                    |                |                          |    |    |    | 19 |    |
|                               | G1/2" male (Manometer) <sup>2)</sup>   |                                    |                |                          |    |    |    | 11 |    |
|                               | 1/4" NPT male <sup>2) 5)</sup>   |                                    |                |                          |    |    |    | 30 |    |
|                               | 1/2" NPT male <sup>2) 5)</sup>   |                                    |                |                          |    |    |    | 51 |    |
|                               | M14x1.5 male (conical seal: 58°) <sup>3)</sup>   |                                    |                |                          |    |    |    | 28 |    |
|                               | M18x1.5 male (conical seal: 58°) <sup>3)</sup>   |                                    |                |                          |    |    |    | 29 |    |
| Electrical connection         | Male electrical plug EN 175301-803-A (DIN43650-A), Mat. PA, normal vibration resistance ≤ 600 bar  |                                    |                |                          |    |    |    |    | 04 |
|                               | Male electrical plug EN 175301-803-A (DIN43650-A), Mat. PA, extended vibration resistance  |                                    |                |                          |    |    |    |    | 05 |
|                               | Male electrical plug: DIN72585 Code 1, Mat.: PBT (Contacts Mat.: Sn)   |                                    |                |                          |    |    |    |    | 25 |
|                               | Male electrical plug MIL-C 26482, 6-pole, metal <sup>8)</sup>  |                                    |                |                          |    |    |    |    | 02 |
|                               | Cable with shield: Material: FDR 25 (Raychem) 4 x 0.5mm <sup>2</sup> <sup>6)</sup>   |                                    |                |                          |    |    |    |    | 78 |
| Output signal                 | Signal output  | Load resistance                    | I (supply)     | U (supply)               |    |    |    |    |    |
|                               | 4 ... 20mA   | (U <sub>supply</sub> -9 V) / 20 mA |                | 9 ... 32 VDC             |    |    |    |    | 19 |
|                               | 0.5 ... 4.5 VDC <sup>7)</sup>  | ≥ 15.0 kΩ                          | ≤ 12 mA        | 5 VDC ± 0.25 VDC ratiom. |    |    |    |    | 23 |
| Accessories                   | Pressure peak damping element ø 1.0 mm   |                                    |                |                          |    |    |    |    | 40 |
|                               | Pressure peak damping element ø 0.3 mm   |                                    |                |                          |    |    |    |    | 43 |
|                               | Pressure peak damping element ø 0.5 mm   |                                    |                |                          |    |    |    |    | 45 |
|                               | Female electrical connector EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C  |                                    |                |                          |    |    |    |    | 58 |
|                               | Female electrical connector MIL-C 26482, 6-pole, metal   |                                    |                |                          |    |    |    |    | 32 |
|                               | Special electrical connection: Pin 1 +, Pin 2 -<br>(only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A) |                                    |                |                          |    |    |    |    | 92 |
|                               | Cable length 1.5 m   |                                    |                |                          |    |    |    |    | 1M |
|                               | Cable length 3.0 m   |                                    |                |                          |    |    |    |    | 3M |
|                               | Cable length 5.0 m   |                                    |                |                          |    |    |    |    | 5M |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> For Ranges ≤ 600 bar

<sup>3)</sup> For ranges > 600 bar

<sup>4)</sup> Only with electrical connection 04

<sup>5)</sup> Please ask us

<sup>6)</sup> Cable length see accessories

<sup>7)</sup> Only with electrical connections 25 and 78

<sup>8)</sup> For pressure ranges < 40 bar upon request

## Standard products (extra short lead time)


| Product No. | Type Code                          | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|------------------------------------|----------------------|--------------------------|--------------|--------------------------|
| EPN4.0A     | 8298 76 2517 04 0000 0000 19 43 58 | 0 ... 4              | 8                        | 9 ... 32     | ± 0.5                    |
| EPN6.0A     | 8298 77 2517 04 0000 0000 19 43 58 | 0 ... 6              | 12                       | 9 ... 32     | ± 0.5                    |
| EPN10.0A    | 8298 78 2517 04 0000 0000 19 43 58 | 0 ... 10             | 20                       | 9 ... 32     | ± 0.5                    |
| EPN16.0A    | 8298 79 2517 04 0000 0000 19 43 58 | 0 ... 16             | 32                       | 9 ... 32     | ± 0.5                    |
| EPN25.0A    | 8298 80 2517 04 0000 0000 19 43 58 | 0 ... 25             | 50                       | 9 ... 32     | ± 0.5                    |
| EPN40.0A    | 8298 81 2517 04 0000 0000 19 43 58 | 0 ... 40             | 80                       | 9 ... 32     | ± 0.5                    |
| EPN60.0A    | 8298 82 2517 04 0000 0000 19 43 58 | 0 ... 60             | 120                      | 9 ... 32     | ± 0.5                    |
| EPN100.0A   | 8298 83 2517 04 0000 0000 19 43 58 | 0 ... 100            | 200                      | 9 ... 32     | ± 0.5                    |
| EPN250.0A   | 8298 74 2517 04 0000 0000 19 43 58 | 0 ... 250            | 500                      | 9 ... 32     | ± 0.5                    |
| EPN400.0A   | 8298 84 2517 04 0000 0000 19 43 58 | 0 ... 400            | 800                      | 9 ... 32     | ± 0.5                    |

| Specifications                  |                                    |   |
|---------------------------------|------------------------------------|---|
| <b>Electrical Data</b>          | Output / supply voltage            | 4 ... 20 mA: 24 (9 ... 32) VDC<br>0.5 ... 4.5 VDC: 5 VDC ratiom.  |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure  |
| <b>Environmental conditions</b> | Media temperature                  | -40°C ... +125°C  |
|                                 | Ambient temperature                | -40°C ... +125°C  |
|                                 | Protection <sup>1)</sup>           | IP65, IP67, IP69K   |
|                                 | Humidity                           | Max. 95 % relative  |
|                                 | Vibration                          | Electrical connection 04/02: 10 g (50...2000 Hz)<br>Electrical connection 05: 15 g (50...2000 Hz)<br>Electrical connection 25: 15 g RMS<br>Electrical connection 78: 20 g RMS |
|                                 | Shock                              | 50 g / 3 ms   |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-4  |
|                                 | Immunity                           | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4542 (AISI630)  |
|                                 | Pressure connection (wetted parts) | 1.4542 (AISI630)  |
|                                 | Housing                            | 1.4301 (AISI304)<br>except male electrical plug 04 and 2.5...250bar:<br>1.4542 (AISI630)  |
|                                 | Sealing                            | FKM 70 Sh   |
|                                 | Male electrical plug               | See ordering information  |
|                                 | Weight                             | ~ 80...110 g  |
|                                 | Mounting torque                    | 25 Nm<br>Pressure connection 28/29: 30 Nm   |


<sup>1)</sup> See electrical connection

| Accuracy                           |               |                         |                         |
|------------------------------------|---------------|-------------------------|-------------------------|
|                                    |               | Measuring accuracy 0.5% | Measuring accuracy 0.3% |
|                                    |               | Ordering No. 25         | Ordering No. 23         |
| TEB @ -25...+85°C                  | [% FS typ.]   | ± 2.0                   | ± 0.5                   |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.5                   | ± 0.3                   |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2                   | ± 0.1                   |
| TC zero point and span             | [% FS/K typ.] | ± 0.03                  | ± 0.005                 |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.2                   | ± 0.2                   |


## Measuring accuracy 0.5 %

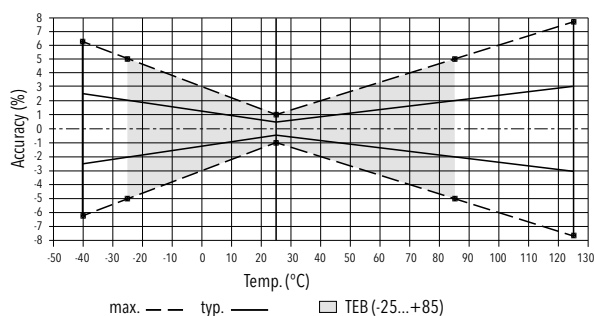


## Measuring accuracy 0.3 %

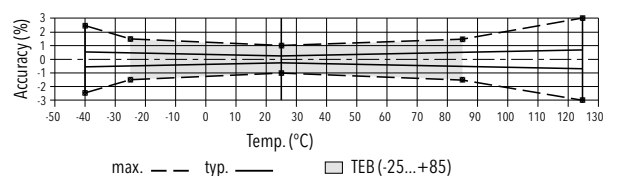


## Dimensions




8298.XX.XXXX.04.XX.XX




8298.XX.XXXX.05.XX.XX

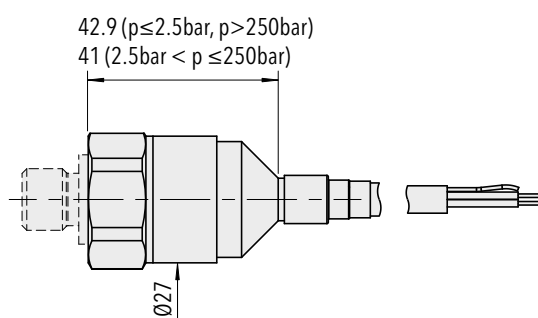


8298.XX.XXXX.78.XX.XX




8298.XX.XXXX.25.XX.XX

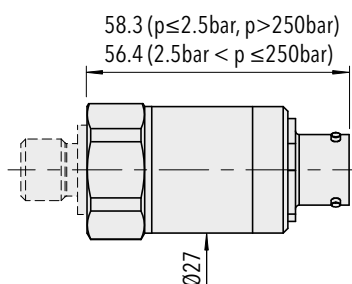


8298.XX.XXXX.02.XX.XX




8298.XX.XXXX.02.XX.32




8298.XX.XX17.XX.XX.XX  
Pressure ranges: ≤ 600 bar




8298.XX.XX19.XX.XX.XX  
Pressure ranges: ≤ 600 bar




8298.XX.XX11.XX.XX.XX  
Pressure ranges: ≤ 600 bar




8298.XX.XX30.XX.XX.XX




8298.XX.XX51.XX.XX.XX

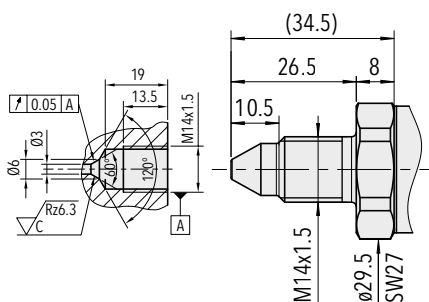

8298.XX.XX28.XX.XX.XX  
Pressure ranges: ≤ 2500 bar

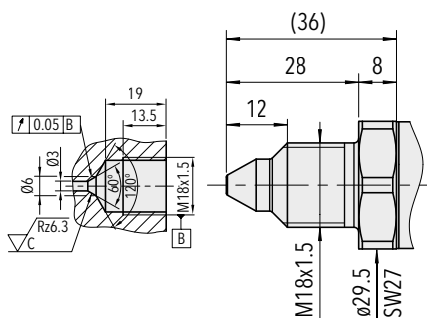





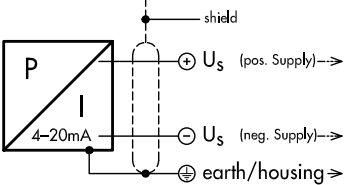
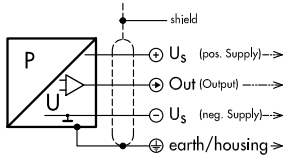
8298.XX.XX29.XX.XX.XX  
Pressure ranges: ≤ 2500 bar



1) Torque moment 50...60 Ncm

8298.XX.XXXX.XX.XX.58

## Electrical connection

|               |  | Protection / electrical connection  |   |   |  |                  |
|---------------|--|---|---|---|--|------------------|
|               |  | IP65 <sup>*)</sup>  | IP69K   | IP67 <sup>*)</sup>  | IP69K <sup>*)</sup>  |                  |
|               |  | Industrial standard<br>EN175301-803A<br><b>04/05</b><br> | Cable <b>**)</b><br><b>78</b><br>Shield<br> | MIL-C 26482<br><b>02</b><br> | DIN 72585 <sup>**)</sup><br>Code 1<br><b>25</b><br> |                  |
| Output signal | <br><b>8298.XX.XXXX.XX.19</b> | Standard<br>2<br>1<br>⊕   | with accessory <b>92</b><br>1<br>2<br>⊕   | brown<br>black<br>yellow / green  | A<br>B<br>E  | 1<br>4<br>3      |
|               | <br><b>8298.XX.XXXX.XX.23</b> |   |   | brown<br>blue<br>black<br>yellow / green  |  | 1<br>2<br>4<br>3 |

<sup>\*)</sup> Provided female connector is mounted according to instructions

<sup>\*\*)</sup> Ventilation via cable end

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72312">www.trafag.com/H72312</a> |
| Instructions | <a href="http://www.trafag.com/H73311">www.trafag.com/H73311</a> |
| Flyer        | <a href="http://www.trafag.com/H70669">www.trafag.com/H70669</a> |

# RAILWAY PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The EPR pressure transmitter was specifically designed for the high demand of the railway industry and offers reliable and accurate pressure measurement over a wide temperature range. Its excellent long-term stability is based on the leading thin-film-on-steel sensor technology from Trafag.



## Applications

- Railways



## Features

- Dielectrical strength: 500 VAC, 50 Hz, meets EN50155 (Railways)
- Compact design
- Good temperature resistance
- Different accuracy classes
- Completely welded steel sensor system without additional seals

| Technical Data       |                                    |                       |                    |
|----------------------|------------------------------------|-----------------------|--------------------|
| Measuring principle  | Thin film on steel                 | Media temperature     | -40°C ... +125°C   |
| Measuring range      | 0 ... 2.5 to 0 ... 600 bar         | Ambient temperature   | -40°C ... +125°C   |
| Output signal        | 4 ... 20 mA                        | Approval / conformity | EN50155 (Railways) |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ.<br>± 0.3 % FS typ. |                       |                    |

Subject to change

## Ordering information/type code

|                                      |   |                                  |                             | 8293 . XX         | XX | XX | XX | XX | XX |
|--------------------------------------|---|----------------------------------|-----------------------------|-------------------|----|----|----|----|----|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range [bar]</b>   | <b>Over pressure [bar]</b>       | <b>Burst pressure [bar]</b> |                   |    |    |    |    |    |
|                                      | 0 ... 2.5   | 5                                | 100                         | 75                |    |    |    |    |    |
|                                      | 0 ... 4   | 8                                | 100                         | 76                |    |    |    |    |    |
|                                      | 0 ... 6   | 12                               | 100                         | 77                |    |    |    |    |    |
|                                      | 0 ... 10  | 20                               | 200                         | 78                |    |    |    |    |    |
|                                      | 0 ... 16  | 32                               | 200                         | 79                |    |    |    |    |    |
|                                      | 0 ... 25  | 50                               | 300                         | 80                |    |    |    |    |    |
|                                      | 0 ... 40  | 80                               | 300                         | 81                |    |    |    |    |    |
|                                      | 0 ... 60  | 120                              | 500                         | 82                |    |    |    |    |    |
|                                      | 0 ... 100   | 200                              | 500                         | 83                |    |    |    |    |    |
|                                      | 0 ... 160   | 320                              | 1000                        | 85                |    |    |    |    |    |
|                                      | 0 ... 250   | 500                              | 1000                        | 74                |    |    |    |    |    |
|                                      | 0 ... 400   | 800                              | 1500                        | 84                |    |    |    |    |    |
|                                      | 0 ... 600   | 1000                             | 2000                        | 86                |    |    |    |    |    |
| <b>Sensor</b>                        | Relative pressure, accuracy: 0.3%   |                                  |                             | 23                |    |    |    |    |    |
|                                      | Relative pressure, accuracy: 0.5%   |                                  |                             | 25                |    |    |    |    |    |
| <b>Pressure connection</b>           | G1/4" male (O-Ring)   |                                  |                             |                   | 17 |    |    |    |    |
|                                      | R1/4" male <sup>2)</sup>  |                                  |                             |                   | 19 |    |    |    |    |
|                                      | 1/4"NPT male <sup>3)</sup>  |                                  |                             |                   | 30 |    |    |    |    |
|                                      | 1/2"NPT male <sup>3)</sup>  |                                  |                             |                   | 51 |    |    |    |    |
| <b>Electrical connection</b>         | Male electrical plug EN 175301-803-A (DIN43650-A), Mat. PA  |                                  |                             |                   |    |    | 04 |    |    |
|                                      | Male electrical plug EN 175301-803-A, Mat. PA, Extended vibration resistance  |                                  |                             |                   |    |    | 05 |    |    |
|                                      | Male electrical plug MIL-C 26482, 6-pole, metal <sup>4)</sup>   |                                  |                             |                   |    |    | 02 |    |    |
| <b>Output signal</b>                 | <b>Signal output</b>  | <b>Load resistance</b>           | <b>I (supply)</b>           | <b>U (supply)</b> |    |    |    |    |    |
|                                      | 4 ... 20mA  | (U <sub>supply</sub> -9V) / 20mA |                             | 9 ... 32 VDC      |    |    |    | 19 |    |
| <b>Accessories</b>                   | Pressure peak damping element ø 1.0 mm  |                                  |                             |                   |    |    |    |    | 40 |
|                                      | Pressure peak damping element ø 0.3 mm  |                                  |                             |                   |    |    |    |    | 43 |
|                                      | Pressure peak damping element ø 0.5 mm  |                                  |                             |                   |    |    |    |    | 45 |
|                                      | Female electrical connector: EN 175301-803-A (DIN43650-A)/Silicone, -40°C ... +125 °C   |                                  |                             |                   |    |    |    |    | 56 |
|                                      | Female electrical connector EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C   |                                  |                             |                   |    |    |    |    | 58 |
|                                      | Female electrical connector MIL-C 26482, 6-pole, metal  |                                  |                             |                   |    |    |    |    | 32 |
|                                      | Special electrical connection: Pin 1 + , Pin 2 -<br>(only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A) |                                  |                             |                   |    |    |    |    | 92 |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Only with electrical connection 04

<sup>3)</sup> Please ask us

<sup>4)</sup> For pressure ranges < 40 bar upon request




| Specifications                  |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Electrical Data</b>          | Dielectric strength                | 500 VAC, 50 Hz   |
|                                 | Resistance of insulation           | > 10 MΩ, 500 VDC   |
|                                 | Output / supply voltage            | 4...20 mA: 24 (9...32) VDC   |
|                                 | Rise time                          | Typ. 1 ms/10...90 % nominal pressure   |
| <b>Environmental conditions</b> | Media temperature                  | -40°C ... +125°C   |
|                                 | Ambient temperature                | -40°C ... +125°C   |
|                                 | Protection <sup>1)</sup>           | IP65, IP67   |
|                                 | Humidity                           | Max. 95 % relative   |
|                                 | Vibration                          | Electrical connection 04/02:<br>10g (20...2000 Hz)/5 grms<br>Electrical connection 05:<br>15g (20...2000 Hz)                 |
|                                 | Shock                              | 50 g / 11 ms   |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-4   |
|                                 | Immunity                           | EN/IEC 61000-6-2   |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4542 (AISI630)   |
|                                 | Pressure connection (wetted parts) | Pressure ranges ≤ 250 bar and > 600 bar:<br>1.4542 (AISI630)<br>Pressure ranges > 250 bar and ≤ 600 bar:<br>1.4301 (AISI304) |
|                                 | Housing                            | 1.4301 (AISI304)<br>except male electrical plug 04 and 2.5...250bar:<br>1.4542 (AISI630)                                     |
|                                 | Sealing                            | FKM 70 Sh  |
|                                 | Male electrical plug               | See ordering information   |
|                                 | Weight                             | ~ 80...110 g   |
|                                 | Mounting torque                    | 25 Nm  |


<sup>1)</sup> See electrical connection

| Accuracy                           |               |                         |                         |
|------------------------------------|---------------|-------------------------|-------------------------|
|                                    |               | Measuring accuracy 0.5% | Measuring accuracy 0.3% |
|                                    |               | Ordering No. 25         | Ordering No. 23         |
| TEB @ -25...+85°C                  | [% FS typ.]   | ± 2.0                   | ± 0.5                   |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.5                   | ± 0.3                   |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2                   | ± 0.1                   |
| TC zero point and span             | [% FS/K typ.] | ± 0.03                  | ± 0.005                 |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.2                   | ± 0.2                   |



## Measuring accuracy 0.5 %

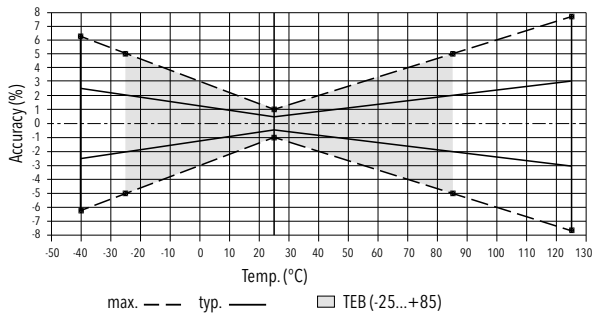




## Measuring accuracy 0.3 %

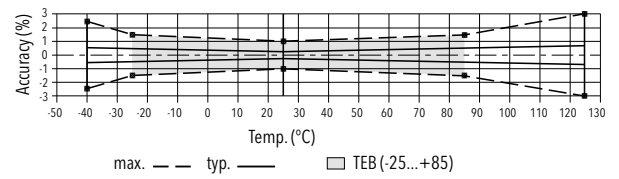

## Dimensions

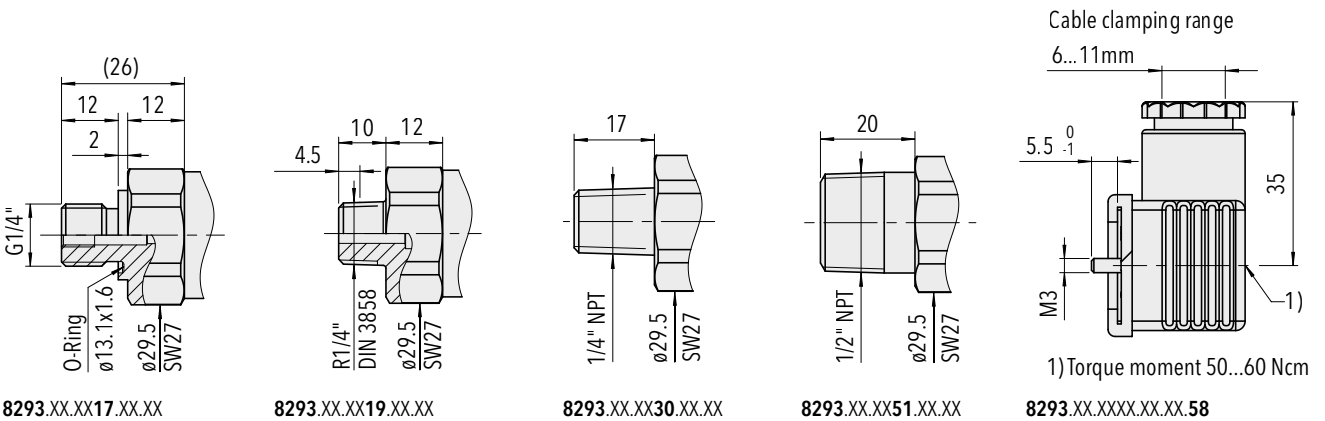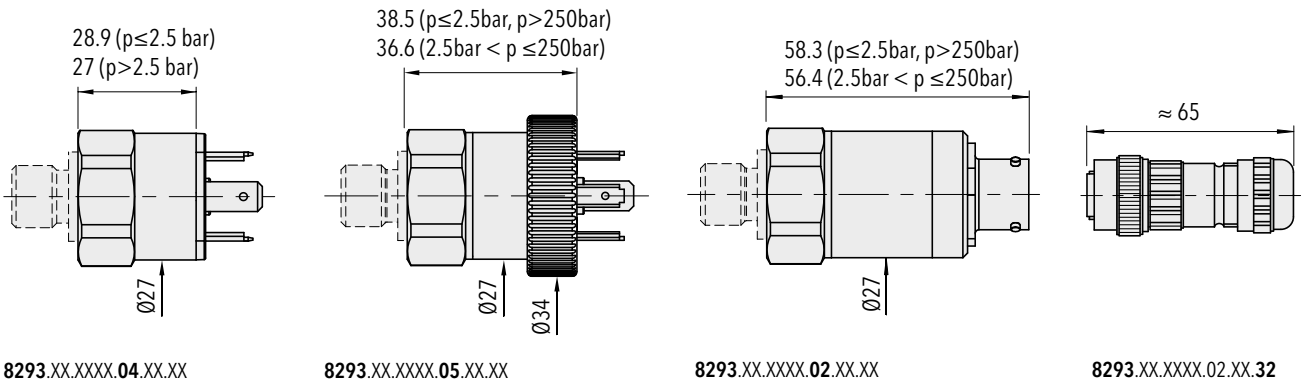

## Electrical connection
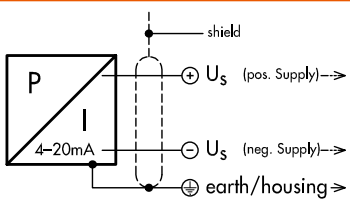
|  |  | Protection / electrical connection  |   |             |
|--|--|---|---|-------------|
|  |  | IP65  | IP67*   |             |
| <b>Output signal</b><br> <p><b>8293.XX.XXXX.XX.19</b></p> |  | Industrial standard<br>EN175301-803A<br><b>04/05</b><br> | MIL-C 26482<br><b>02</b><br> |             |
|  |  | Standard<br>2<br>1<br>⊕   | with accessory <b>92</b><br>1<br>2<br>⊕   | A<br>B<br>E |

\*1) Provided female connector is mounted according to instructions

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72311">www.trafag.com/H72311</a> |
| Instructions | <a href="http://www.trafag.com/H73311">www.trafag.com/H73311</a> |
| Flyer        | <a href="http://www.trafag.com/H70674">www.trafag.com/H70674</a> |

# PICOTRANS

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The NPN pressure transmitter offers reliable and accurate pressure measurement over a wide temperature range. Its excellent long-term stability is based on the leading thin-film-on-steel sensor technology from Trafag. Its robust design and the block design with its optional flange connection makes the NPN the perfect choice for demanding applications such as marine and rail industries.



## Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools
- Hydraulics



## Features

- Compact design
- Flange connection (PICO family)
- High vibration resistance
- Good temperature resistance
- Completely welded steel sensor system without additional seals

| Technical Data       |                                    |                       |   |
|----------------------|------------------------------------|-----------------------|---|
| Measuring principle  | Thin film on steel                 | Media temperature     | -40°C ... +100°C                                |
| Measuring range      | 0 ... 2.5 to 0 ... 250 bar         | Ambient temperature   | -40°C ... +100°C                                |
| Output signal        | 4 ... 20 mA                        | Approval / conformity | ABS, BV, CCS, DNV-GL, KRS, LRS, NKK, RINA, RMRS |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ.<br>± 0.3 % FS typ. |                       |   |

Subject to change

## Ordering information/type code

|                                      |   |                                    |                                | 8264 . XX         | XX | XX | XX | XX | XX |
|--------------------------------------|---|------------------------------------|--------------------------------|-------------------|----|----|----|----|----|
| <b>Measuring range</b> <sup>1)</sup> | <b>Pressure measurement range</b><br>[bar]  | <b>Over pressure</b><br>[bar]      | <b>Burst pressure</b><br>[bar] |                   |    |    |    |    |    |
|                                      | 0 ... 2.5   | 5                                  | 100                            | 75                |    |    |    |    |    |
|                                      | 0 ... 4   | 8                                  | 100                            | 76                |    |    |    |    |    |
|                                      | 0 ... 6   | 12                                 | 100                            | 77                |    |    |    |    |    |
|                                      | 0 ... 10  | 20                                 | 200                            | 78                |    |    |    |    |    |
|                                      | 0 ... 16  | 32                                 | 200                            | 79                |    |    |    |    |    |
|                                      | 0 ... 25  | 50                                 | 300                            | 80                |    |    |    |    |    |
|                                      | 0 ... 40  | 80                                 | 300                            | 81                |    |    |    |    |    |
|                                      | 0 ... 60  | 120                                | 500                            | 82                |    |    |    |    |    |
|                                      | 0 ... 100   | 200                                | 500                            | 83                |    |    |    |    |    |
|                                      | 0 ... 160 <sup>2)</sup>   | 320                                | 1000                           | 85                |    |    |    |    |    |
| 0 ... 250 <sup>2)</sup>              | 500   | 1000                               | 74                             |                   |    |    |    |    |    |
| <b>Sensor</b>                        | Relative pressure, accuracy: 0.3 %  |                                    |                                |                   | 23 |    |    |    |    |
|                                      | Relative pressure, accuracy: 0.5 %  |                                    |                                |                   | 25 |    |    |    |    |
| <b>Pressure connection</b>           | G1/4" female  |                                    |                                |                   |    | 10 |    |    |    |
|                                      | M10x1 female  |                                    |                                |                   |    | 17 |    |    |    |
|                                      | G1/8" female  |                                    |                                |                   |    | 18 |    |    |    |
| <b>Electrical connection</b>         | Male electrical plug: EN 175301-803-A (DIN43650-A), Mat.: PA  |                                    |                                |                   |    |    | 04 |    |    |
|                                      | Cable with shield: Material: FDR 25 (Raychem) 4 x 0.5 mm <sup>2</sup> (cable length see "Accessories")  |                                    |                                |                   |    |    | 78 |    |    |
| <b>Output signal</b>                 | <b>Signal output</b>  | <b>Load resistance</b>             | <b>I (supply)</b>              | <b>U (supply)</b> |    |    |    |    |    |
|                                      | 4 ... 20mA  | (U <sub>supply</sub> -9 V) / 20 mA |                                | 24 (9 ... 32)VDC  |    |    |    | 19 |    |
| <b>Accessories</b>                   | Flange connection with O-Ring <sup>3)</sup>   |                                    |                                |                   |    |    |    |    | 41 |
|                                      | Pressure peak damping element ø 1.0 mm  |                                    |                                |                   |    |    |    |    | 40 |
|                                      | Pressure peak damping element ø 0.3 mm  |                                    |                                |                   |    |    |    |    | 43 |
|                                      | Pressure peak damping element ø 0.5 mm  |                                    |                                |                   |    |    |    |    | 45 |
|                                      | Welsh plug G1/8"  |                                    |                                |                   |    |    |    |    | 57 |
|                                      | Welsh plug G1/4"  |                                    |                                |                   |    |    |    |    | 74 |
|                                      | Female electrical connector EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C   |                                    |                                |                   |    |    |    |    | 58 |
|                                      | Elbow connector female: 90° EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C   |                                    |                                |                   |    |    |    |    | 55 |
|                                      | Fixing set  |                                    |                                |                   |    |    |    |    | V3 |
|                                      | Special electrical connection: Pin 1 + , Pin 2 -<br>(only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A) |                                    |                                |                   |    |    |    |    | 92 |
|                                      | Cable length 1.5 m  |                                    |                                |                   |    |    |    |    | 1M |
|                                      | Cable length 3.0 m  |                                    |                                |                   |    |    |    |    | 3M |
|                                      | Cable length 5.0 m  |                                    |                                |                   |    |    |    |    | 5M |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Only for pressure connection G1/4"

<sup>3)</sup> Flange (accessory 41) only for pressure ranges ≤ 40 bar

## Standard products (extra short lead time)


| Product No. | Type Code                                | Pressure range [bar] | Over pressure max. [bar] | Signal output | Supply [VDC]  |
|-------------|--|----------------------|--------------------------|---------------|---------------|
| NPN4.0A4    | 8264 76 2510 04 0000 0000 19 58 V3       | 0...4                | 10                       | 4...20 mA     | 24 (9 ... 32) |
| NPN6.0A4    | 8264 77 2510 04 0000 0000 19 58 V3       | 0...6                | 15                       | 4...20 mA     | 24 (9 ... 32) |
| NPN10.0A4   | 8264 78 2510 04 0000 0000 19 58 V3       | 0...10               | 20                       | 4...20 mA     | 24 (9 ... 32) |
| NPN16.0A4   | 8264 79 2510 04 0000 0000 19 58 V3       | 0...16               | 32                       | 4...20 mA     | 24 (9 ... 32) |
| NPN25.0A4   | 8264 80 2510 04 0000 0000 19 58 V3       | 0...25               | 50                       | 4...20 mA     | 24 (9 ... 32) |
| NPN40.0A4   | 8264 81 2510 04 0000 0000 19 58 V3       | 0...40               | 80                       | 4...20 mA     | 24 (9 ... 32) |
| NPN4.0AF4   | 8264 76 2510 04 0000 0000 19 41 58 74 V3 | 0...4                | 10                       | 4...20 mA     | 24 (9 ... 32) |
| NPN6.0AF4   | 8264 77 2510 04 0000 0000 19 41 58 74 V3 | 0...6                | 15                       | 4...20 mA     | 24 (9 ... 32) |
| NPN10.0AF4  | 8264 78 2510 04 0000 0000 19 41 58 74 V3 | 0...10               | 20                       | 4...20 mA     | 24 (9 ... 32) |
| NPN16.0AF4  | 8264 79 2510 04 0000 0000 19 41 58 74 V3 | 0...16               | 32                       | 4...20 mA     | 24 (9 ... 32) |
| NPN25.0AF4  | 8264 80 2510 04 0000 0000 19 41 58 74 V3 | 0...25               | 50                       | 4...20 mA     | 24 (9 ... 32) |
| NPN40.0AF4  | 8264 81 2510 04 0000 0000 19 41 58 74 V3 | 0...40               | 80                       | 4...20 mA     | 24 (9 ... 32) |

| Specifications                  |                                    |   |
|---------------------------------|------------------------------------|---|
| <b>Electrical Data</b>          | Output / supply voltage            | 4...20 mA: 24 (9...32) VDC  |
|                                 | Rise time                          | typ. 1 ms/10...90 % nominal pressure  |
| <b>Environmental conditions</b> | Media temperature                  | -40°C ... +100°C  |
|                                 | Ambient temperature                | -40°C ... +100°C  |
|                                 | Protection <sup>1)</sup>           | Electrical connection 04: IP65<br>Electrical connection 78: IP69K   |
|                                 | Humidity                           | Max. 95 % relative  |
|                                 | Vibration                          | Electrical connection 04/accessory 55:<br>10g (50...2000 Hz)<br>Electrical connection 04: 15g (50...2000 Hz)<br>Electrical connection 78: 15g rms |
|                                 | Shock                              | 50g/ 3 ms   |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-4  |
|                                 | Immunity                           | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4542 (AISI630)  |
|                                 | Pressure connection (wetted parts) | 1.4542 (AISI630)  |
|                                 | Housing                            | 1.4301 (AISI304)  |
|                                 | Sealing                            | NBR   |
|                                 | Male electrical plug               | See ordering information  |
|                                 | Weight                             | ~ 190...220 g   |
|                                 | Mounting torque                    | See accessories   |


<sup>1)</sup> Electrical connection 04: Provided female connector is mounted according to instructions

| Accuracy                           |               |  |  |
|------------------------------------|---------------|--|--|
|                                    |               | Measuring accuracy 0.5%<br>Ordering No. 25 | Measuring accuracy 0.3%<br>Ordering No. 23 |
| TEB @ -25...+85°C                  | [% FS typ.]   | ± 2.0                                      | ± 0.5                                      |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.5                                      | ± 0.3                                      |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2                                      | ± 0.1                                      |
| TC zero point and span             | [% FS/K typ.] | ± 0.03                                     | ± 0.005                                    |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.2                                      | ± 0.2                                      |


## Measuring accuracy 0.5%

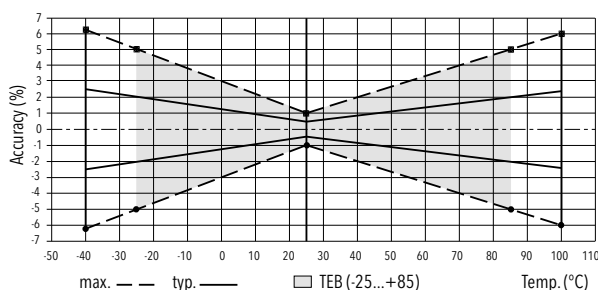


## Measuring accuracy 0.3%

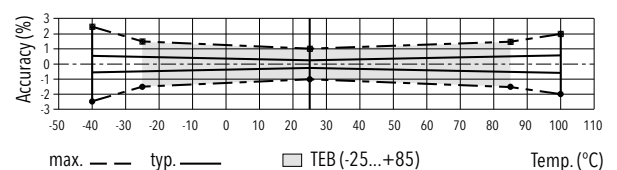


## Dimensions

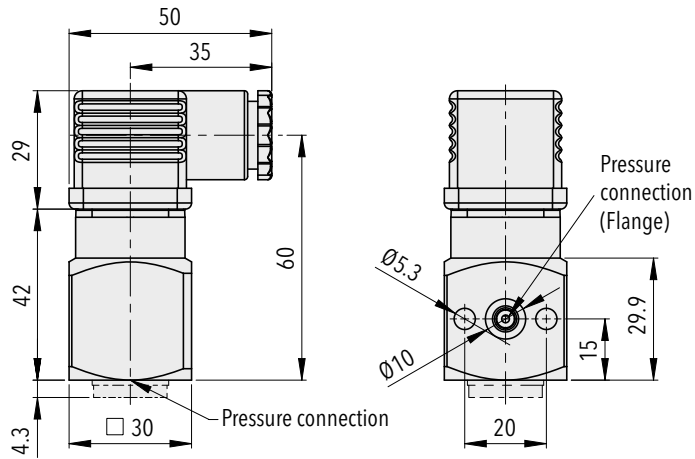

8264.XX.XXXX.04.XX.XX

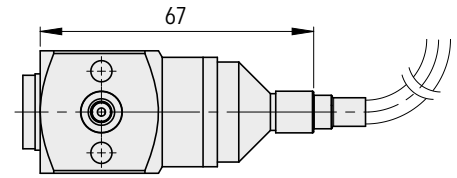


8264.XX.XXXX.78.XX.XX




G 1/4"x12: 8264.XX.XX10.XX.XX.XX

G 1/8"x10: 8264.XX.XX18.XX.XX.XX


M10x1x10: 8264.XX.XX17.XX.XX.XX




Flange: 8264.XX.XXXX.XX.XX.41

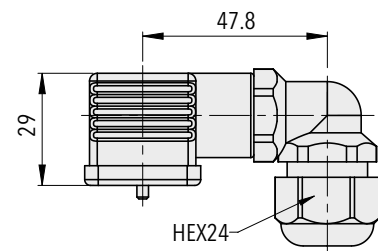

8264.XX.XXXX.XX.XX.55

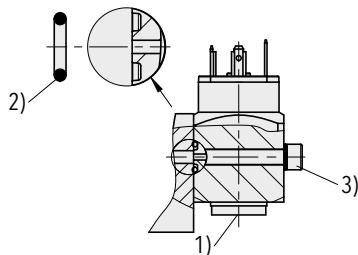

8264.XX.XXXX.XX.XX.41




8264.XX.XXXX.XX.XX.V3

1) Torque: G 1/4":  $M_A = 32 \dots 40 \text{ Nm}$

2) O-Ring:  $\varnothing 6.75 \times 1.78 \text{ NBR 90 Sh}$

3) Fixing screw: M5; property class: 8.8; torque:  $4.5 \dots 6 \text{ Nm}$




Electrical connector center screw: max. torque  $0.4 \text{ Nm}$

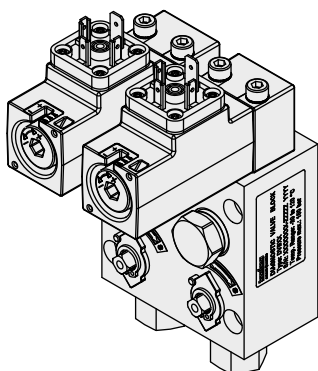

Diagnostic Valve Bloc (DVB)  
see specification sheet H72361



## Electrical connection
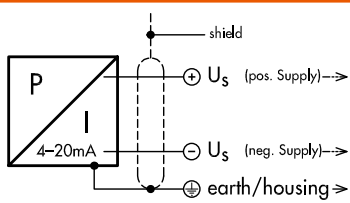
|   |  | Protection / electrical connection   |   |
|---|--|--|---|
|   |  | IP65   | IP69K   |
| <b>Output signal</b><br> <p>shield</p> <p>U<sub>s</sub> (pos. Supply) →</p> <p>U<sub>s</sub> (neg. Supply) →</p> <p>earth/housing →</p> <p>4-20mA</p> <p><b>8264.XX.XXXX.XX.19</b></p> |  | Industrial standard<br>EN175301-803A<br><b>04</b><br> | Cable <b>**)</b><br><b>78</b><br>Shield<br> |
|   |  | Standard<br>2<br>1<br>⊕  | with accessory <b>92</b><br>1<br>2<br>⊕   |

\*\*\*) Ventilation via cable end

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72313">www.trafag.com/H72313</a> |
| Instructions | <a href="http://www.trafag.com/H73313">www.trafag.com/H73313</a> |
| Flyer        | <a href="http://www.trafag.com/H70673">www.trafag.com/H70673</a> |

# FLUSH MEMBRANE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The Flush Membrane Transmitter FPT is based on Trafag's own thin-film-on-steel technology and the in-house developed high performance ASIC chip electronics. It therefore ensures a high level of accuracy over a wide temperature range and excellent long-term stability in combination with an extraordinary smooth diaphragm surface.



## Applications

- Engine manufacturing
- Machine tools
- Hydraulics
- Process technology
- Water treatment
- Food Industry
- Chemical and pharmaceutical industry

## Features

- Flush membrane with smooth and plain surface
- Completely welded sensor system
- Very compact design
- Accuracy NLH 0.1% FS typ.
- Excellent long-term stability

## Technical Data

|                     |   |                      |   |
|---------------------|---|----------------------|---|
| Measuring principle | Thin film on steel  | Accuracy @ 25°C typ. | ± 0.4 % FS  |
| Measuring range     | 0 ... 0.3 to 0 ... 100 bar<br>0 ... 15 to 0 ... 1500 psi                        | Media temperature    | -40°C ... +125°C                                  |
| Output signal       | 4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC,<br>0 ... 10 VDC, 0.5 ... 4.5 VDC ratiom. | Ambient temperature  | -40°C ... +85°C<br>(Cable PVC 22: -5°C ... +60°C) |

Subject to change


## Ordering information/type code

|                                      |   |                                    |                             |                   |   |                            | 8235 . XX                   | XX        | XX | XX        | XX        | XX        |
|--------------------------------------|---|------------------------------------|-----------------------------|-------------------|---|----------------------------|-----------------------------|-----------|----|-----------|-----------|-----------|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range [bar]</b>   | <b>Over pressure [bar]</b>         | <b>Burst pressure [bar]</b> |                   | <b>Pressure measurement range [psi]</b> | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |           |    |           |           |           |
|                                      | 0 ... 0.3   | 3                                  | 6                           | <b>65</b>         | 0 ... 15                                | 85                         | 170                         | <b>G1</b> |    |           |           |           |
|                                      | 0 ... 0.4   | 3                                  | 6                           | <b>69</b>         | 0 ... 30                                | 85                         | 170                         | <b>G5</b> |    |           |           |           |
|                                      | 0 ... 0.6   | 3                                  | 6                           | <b>70</b>         | 0 ... 50                                | 115                        | 170                         | <b>G6</b> |    |           |           |           |
|                                      | 0 ... 1   | 6                                  | 12                          | <b>71</b>         | 0 ... 100                               | 170                        | 260                         | <b>G7</b> |    |           |           |           |
|                                      | 0 ... 2.5   | 6                                  | 12                          | <b>75</b>         | 0 ... 150                               | 290                        | 430                         | <b>G8</b> |    |           |           |           |
|                                      | 0 ... 4   | 8                                  | 12                          | <b>76</b>         | 0 ... 250                               | 450                        | 690                         | <b>G9</b> |    |           |           |           |
|                                      | 0 ... 6   | 12                                 | 18                          | <b>77</b>         | 0 ... 400                               | 725                        | 1080                        | <b>H0</b> |    |           |           |           |
|                                      | 0 ... 10  | 20                                 | 30                          | <b>78</b>         | 0 ... 500                               | 1100                       | 1740                        | <b>H1</b> |    |           |           |           |
|                                      | 0 ... 16  | 32                                 | 48                          | <b>79</b>         | 0 ... 1450                              | 2900                       | 4350                        | <b>H3</b> |    |           |           |           |
|                                      | 0 ... 25  | 50                                 | 75                          | <b>80</b>         |   |                            |                             |           |    |           |           |           |
|                                      | 0 ... 40  | 80                                 | 120                         | <b>81</b>         |   |                            |                             |           |    |           |           |           |
|                                      | 0 ... 100   | 200                                | 300                         | <b>83</b>         |   |                            |                             |           |    |           |           |           |
|                                      | <b>Sensor</b>   | Relative pressure                  |                             |                   |   |                            |                             |           |    | <b>23</b> |           |           |
| <b>Pressure connection</b>           | G1/2" male, flush membrane  |                                    |                             |                   |   |                            |                             |           |    | <b>91</b> |           |           |
| <b>Electrical connection</b>         | Male electrical plug EN 175301-803-A (DIN 43650-A) Mat. PA  |                                    |                             |                   |   |                            |                             |           |    |           | <b>05</b> |           |
|                                      | Male electrical plug M12x1, 5-pol., Mat. PA   |                                    |                             |                   |   |                            |                             |           |    |           | <b>35</b> |           |
|                                      | Male electrical plug, Industrial standard (contact distance 9.4 mm) Mat. PBT  |                                    |                             |                   |   |                            |                             |           |    |           | <b>01</b> |           |
|                                      | Male electrical plug Packard Metri Pack   |                                    |                             |                   |   |                            |                             |           |    |           | <b>51</b> |           |
|                                      | Cable IP67 (cable length see "Accessories") Mat. PVC (cable gland PA6-3), -5°C ... +60°C <sup>2)</sup>  |                                    |                             |                   |   |                            |                             |           |    |           | <b>22</b> |           |
|                                      | Cable IP68 max. 3m, medium +10°C...+35°C, max. 1 bar relative   |                                    |                             |                   |   |                            |                             |           |    |           | <b>68</b> |           |
| <b>Output signal</b>                 | <b>Signal output</b>  | <b>Load resistance</b>             |                             | <b>I (supply)</b> | <b>U (supply)</b>                       |                            |                             |           |    |           |           |           |
|                                      | 4 ... 20mA  | (U <sub>supply</sub> -9 V) / 20 mA |                             |                   | 9 ... 30 VDC                            |                            |                             |           |    |           | <b>19</b> |           |
|                                      | 0 ... 5 VDC   | > 2.5 kΩ                           |                             | < 10 mA           | 10 ... 30 VDC                           |                            |                             |           |    |           | <b>14</b> |           |
|                                      | 1 ... 6 VDC   | > 5.0 kΩ                           |                             | < 10 mA           | 10 ... 30 VDC                           |                            |                             |           |    |           | <b>16</b> |           |
|                                      | 0 ... 10 VDC  | > 5.0 kΩ                           |                             | < 10 mA           | 15 ... 30 VDC                           |                            |                             |           |    |           | <b>17</b> |           |
|                                      | 0.5 ... 4.5 VDC   | > 5.0 kΩ                           |                             | < 10 mA           | 5 VDC ± 0.25 VDC ratiom.                |                            |                             |           |    |           | <b>23</b> |           |
| <b>Accessories</b>                   | Sealing Ring DIN 3869, Mat. FPM (FKM) -15°C ... +125°C  |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>61</b> |
|                                      | Sealing Ring DIN 3869, Mat. NBR, -25°C ... +100°C   |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>69</b> |
|                                      | Female electrical connector EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C   |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>58</b> |
|                                      | Female electrical plug M12x1, 5-pole  |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>33</b> |
|                                      | Female electrical connector industrial standard   |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>34</b> |
|                                      | Special electrical connection: Pin 1 + , Pin 2 -<br>(only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A) <sup>2)</sup>                                     |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>92</b> |
|                                      | Special electrical connection: Pin 1 Out , Pin 2 -, Pin 3 +<br>(only for output 14, 16, 17, 23 and male electrical plug EN175301-803-A / DIN43650-A) <sup>2)</sup>                              |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>98</b> |
|                                      | Special electrical connection: Pin 1 + , Pin 2 -, Pin 3 out<br>(Only for output 0...5VDC, 1...6VDC, 0...10VDC, 0.5...4.5VDC and male electrical plug EN175301-803-A / DIN43650-A) <sup>2)</sup> |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>97</b> |
|                                      | Special electrical connection: Pin 1 + , Pin 2 -, Pin 3 GR<br>(Only for output 4...20mA and male electrical plug M12x1, 5-pol.) <sup>2)</sup>   |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>94</b> |
|                                      | Special electrical connection: Pin 1 + , Pin 2 -<br>(Only for male electrical plug Packard Metri Pack 3-pol.) <sup>2)</sup>   |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>99</b> |
|                                      | Membrane electropolished Ra=0.4µm   |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>EP</b> |
|                                      | Cable length 1.5 m  |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>1M</b> |
|                                      | Cable length 3.0 m  |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>3M</b> |
|                                      | Cable length 5.0 m  |                                    |                             |                   |   |                            |                             |           |    |           |           | <b>5M</b> |


## Standard products (extra short lead time)

| Product No. | Type Code                          | Pressure range [bar] | Over pressure max. [bar] | Signal output | Accuracy @ 25°C typ. [%] |
|-------------|------------------------------------|----------------------|--------------------------|---------------|--------------------------|
| FPT1.0A     | 8235 71 2391 05 0000 0000 19 58 61 | 0 ... 1              | 6                        | 4 ... 20 mA   | ± 0.4                    |
| FPT2.5A     | 8235 75 2391 05 0000 0000 19 58 61 | 0 ... 2.5            | 5                        | 4 ... 20 mA   | ± 0.4                    |
| FPT4.0A     | 8235 76 2391 05 0000 0000 19 58 61 | 0 ... 4              | 8                        | 4 ... 20 mA   | ± 0.4                    |
| FPT6.0A     | 8235 77 2391 05 0000 0000 19 58 61 | 0 ... 6              | 12                       | 4 ... 20 mA   | ± 0.4                    |
| FPT10.0A    | 8235 78 2391 05 0000 0000 19 58 61 | 0 ... 10             | 20                       | 4 ... 20 mA   | ± 0.4                    |
| FPT16.0A    | 8235 79 2391 05 0000 0000 19 58 61 | 0 ... 16             | 32                       | 4 ... 20 mA   | ± 0.4                    |
| FPT25.0A    | 8235 80 2391 05 0000 0000 19 58 61 | 0 ... 25             | 50                       | 4 ... 20 mA   | ± 0.4                    |
| FPT40.0A    | 8235 81 2391 05 0000 0000 19 58 61 | 0 ... 40             | 80                       | 4 ... 20 mA   | ± 0.4                    |
| FPT100.0A   | 8235 83 2391 05 0000 0000 19 58 61 | 0 ... 100            | 200                      | 4 ... 20 mA   | ± 0.4                    |


## Dimensions

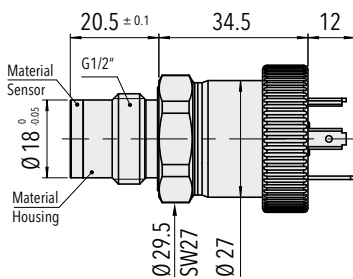


8235.XX.XX91.05.XX.XX




8235.XX.XX91.35.XX.XX

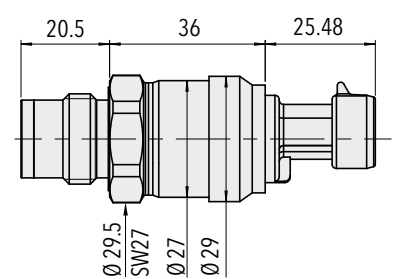

8235.XX.XX91.51.XX.XX




8235.XX.XX91.01.XX.XX

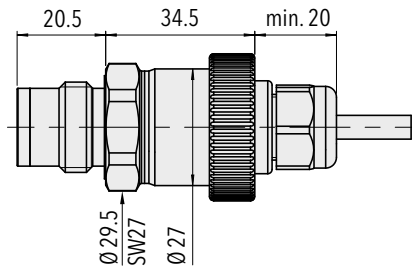


8235.XX.XX91.22.XX.XX

8235.XX.XX91.68.XX.XX

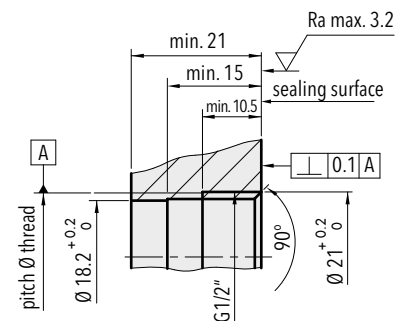


Mounting thread G1/2"  
DIN EN ISO 1179-1




1) Torque moment 50...60 Ncm


8235.XX.XXXX.XX.XX.58



8235.XX.XXXX.XX.XX.33



8235.XX.XXXX.XX.XX.34




Welding flange for G1/2"  
(1.4301)  
Ordering No. C27804

| Specifications                  |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Accuracy</b>                 | TEB typ. @ -25 ... +85°C           | ± 0.5 % FS typ.  |
|                                 | Accuracy @ 25°C typ.               | ± 0.4 % FS   |
|                                 | NLH @ 25°C (BSL) typ.              | ± 0.1 % FS typ.  |
|                                 | TC zero point and span typ.        | ± 0.005 % FS/K typ.  |
|                                 | Long term stability 1 year typ.    | ± 0.2 % FS typ.  |
| <b>Electrical Data</b>          | Output / supply voltage            | 4 ... 20 mA: 24 (9 ... 30) VDC<br>0 ... 5 VDC: 24 (10 ... 30) VDC<br>1 ... 6 VDC: 24 (10 ... 30) VDC<br>0 ... 10 VDC: 24 (15 ... 30) VDC<br>0.5 ... 4.5 VDC: 5 VDC ratiom. |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure   |
|                                 | Switch-on-delay                    | max. 1.5 s   |
| <b>Environmental conditions</b> | Media temperature                  | -40°C ... +125°C   |
|                                 | Ambient temperature                | -40°C ... +85°C<br>(Cable PVC 22: -5°C ... +60°C)  |
|                                 | Protection <sup>1)</sup>           | IP65, IP67, IP68   |
|                                 | Humidity                           | Max. 95 % relative   |
|                                 | Vibration                          | 15 g (50...2000 Hz)  |
|                                 | Shock                              | 50 g / 3 ms  |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-3   |
|                                 | Immunity                           | EN/IEC 61000-6-2   |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4542 (AISI630)   |
|                                 | Pressure connection (wetted parts) | 1.4542 (AISI630)   |
|                                 | Housing                            | 1.4301 (AISI304)   |
|                                 | Sealing                            | FPM (FKM) NBR  |
|                                 | Weight                             | ~ 80 ... 110 g (without cable)   |
|                                 | Mounting torque                    | 20 ... 25 Nm not lubricated  |
|                                 |                                    | 15 ... 20 Nm lubricated  |

<sup>1)</sup> See electrical connection

## Measuring accuracy

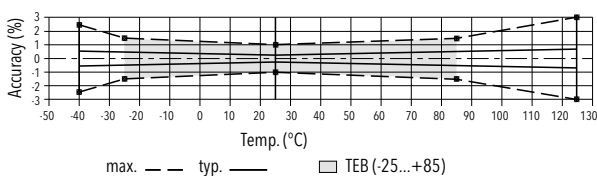

## Electrical connection

|               |   | Protection / electrical connection             |           |                        |       |                           |           |                                      |           |  |   |
|---------------|---|--|-----------|------------------------|-------|---------------------------|-----------|--------------------------------------|-----------|--|---|
|               |   | IP65*)   |           | IP67/IP68 max. 3m      |       | IP67*)                    |           | IP67*)                               |           | IP65   |   |
|               |   | Industrial standard EN175301-803A<br><b>05</b> |           | Cable **) <b>22/68</b> |       | M12x1 5-pole<br><b>35</b> |           | Packet Metri Pak 3-pole<br><b>51</b> |           | Industrial standard EN175301-803A<br><b>01</b> |   |
|               |   |  |           |                        |       |                           |           |                                      |           |  |   |
| Output signal | <p>shield<br/> <math>U_S</math> (pos. Supply)<br/> <math>U_S</math> (neg. Supply)<br/>           earth/housing<br/> <b>8235.XX.XXXX.XX.19</b></p> | Standard                                       | <b>92</b> |                        |       | Standard                  | <b>94</b> |                                      |           | <b>99</b>                                      |   |
|               |   | 2  | 1         | white                  |       | 4                         | 1         | 1                                    | 1         | 2  |   |
|               |   | 1  | 2         | brown                  |       | 1                         | 3         | 2                                    | 3         | 1  |   |
|               |   | ⊕  | ⊖         | ⊖                      |       | 5                         | 5         |                                      |           | ⊖  |   |
|               | <p>shield for DC<br/>           supply ⊕<br/>           output ⊖<br/>           common ⊖<br/> <b>8235.XX.XXXX.XX.14/16/17/23</b></p>              | Standard                                       | <b>98</b> | <b>97</b>              |       |                           |           |                                      | <b>99</b> |  |   |
|               |   | 2  | 3         | 1                      | white |                           | 2         | 1                                    | 1         | 1  | 1 |
|               |   | 3  | 1         | 3                      | green |                           | 4         | 3                                    | 2         | 2  | 2 |
|               |   | 1  | 2         | 2                      | brown |                           | 3         | 2                                    | 3         | 3  | 3 |
|               |   | ⊖  | ⊕         | ⊕                      | ⊖     |                           | 5         |                                      |           | ⊖  | ⊖ |

\*) Electrical connections 05/35/51: provided female connector is mounted according to instructions

\*\*) Ventilation via cable end; shield in the device is not connected

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72316">www.trafag.com/H72316</a> |
| Instructions | <a href="http://www.trafag.com/H73316">www.trafag.com/H73316</a> |
| Flyer        | <a href="http://www.trafag.com/H70648">www.trafag.com/H70648</a> |

# CANOPEN MINIATURE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The CANopen miniature pressure transmitter CMP is based on Trafag's own thin-film-on-steel technology which offers high accuracy and longterm stability even in harsh environments. The most compact design and the proven high-performance electronics with CiA-certified, comprehensive CANopen-functionality makes the CMP 8270 best-in-class pressure transmitter.



## Applications

- Engine manufacturing
- Railways
- Machine tools
- Hydraulics
- Process technology
- Test benches

## Features

- Small and rugged construction
- Different accuracy classes
- Measurement of pressure and temperature
- CANopen bus protocol DS301/DS404 supports CAN 2.0A/B
- LSS (DS 305 V2.0)

| Technical Data      |                            |                      |  |
|---------------------|----------------------------|----------------------|--|
| Measuring principle | Thin film on steel         | Accuracy @ 25°C typ. | ± 0.5 % FS typ.<br>± 0.15 % FS typ.<br>± 0.1 % FS typ. |
| Measuring range     | 0 ... 0.2 to 0 ... 600 bar | Media temperature    | -50°C ... +135°C                                       |
| Output signal       | Bus protocol CANopen DS404 | Ambient temperature  | -40°C ... +125°C                                       |

Subject to change

## Ordering information/type code

|                               |  |                               |   | 8270 . XX | XX | XX | XX | XX | XX |
|-------------------------------|--|-------------------------------|---|-----------|----|----|----|----|----|
| Measuring range <sup>1)</sup> | Pressure measurement range [bar]   | Over pressure [bar]           | Burst pressure [bar]                              |           |    |    |    |    |    |
|                               |  | 0 ... 0.2 <sup>2) 3) 5)</sup> | 1.2   | 25        | 68 |    |    |    |    |
|                               | 0 ... 0.4 <sup>2) 5)</sup>   | 1.2                           | 25  | 69        |    |    |    |    |    |
|                               | 0 ... 0.6 <sup>2) 5)</sup>   | 1.5                           | 25  | 70        |    |    |    |    |    |
|                               | 0 ... 1 <sup>2)</sup>  | 2                             | 25  | 71        |    |    |    |    |    |
|                               | 0 ... 1.6 <sup>2)</sup>  | 3.5                           | 50  | 73        |    |    |    |    |    |
|                               | 0 ... 2.5 <sup>2)</sup>  | 5                             | 50  | 75        |    |    |    |    |    |
|                               | 0 ... 4  | 12                            | 100   | 76        |    |    |    |    |    |
|                               | 0 ... 6  | 12                            | 100   | 77        |    |    |    |    |    |
|                               | 0 ... 10   | 20                            | 200   | 78        |    |    |    |    |    |
|                               | 0 ... 16   | 32                            | 200   | 79        |    |    |    |    |    |
|                               | 0 ... 25   | 50                            | 300   | 80        |    |    |    |    |    |
|                               | 0 ... 40   | 80                            | 300   | 81        |    |    |    |    |    |
|                               | 0 ... 60   | 120                           | 400   | 82        |    |    |    |    |    |
|                               | 0 ... 100  | 200                           | 500   | 83        |    |    |    |    |    |
|                               | 0 ... 160  | 320                           | 750   | 85        |    |    |    |    |    |
|                               | 0 ... 250  | 500                           | 1000  | 74        |    |    |    |    |    |
|                               | 0 ... 400  | 800                           | 1500  | 84        |    |    |    |    |    |
|                               | 0 ... 600  | 1200                          | 2000  | 86        |    |    |    |    |    |
| Sensor                        | Relative pressure, accuracy: 0.5 %   | 25                            | Absolute pressure, accuracy: 0.5 % <sup>4)</sup>  | 45        |    |    |    |    |    |
|                               | Relative pressure, accuracy: 0.15 %  | 21                            | Absolute pressure, accuracy: 0.15 % <sup>4)</sup> | 41        |    |    |    |    |    |
|                               | Relative pressure, accuracy: 0.1 %   | 24                            | Absolute pressure, accuracy: 0.1 % <sup>4)</sup>  | 44        |    |    |    |    |    |
| Pressure connection           | G1/4" male (Seal)  |                               |   |           |    |    |    | 17 |    |
|                               | 1/4" NPT male  |                               |   |           |    |    |    | 30 |    |
|                               | 7/16"-20UNF male <sup>3) 4)</sup>  |                               |   |           |    |    |    | 18 |    |
|                               | 7/16"-20UNF female, DIN3866 (valve opener) <sup>3) 4)</sup>                        |                               |   |           |    |    |    | 24 |    |
| Electrical connection         | Male electrical plug M12x1, 5-pole, Mat. PA  |                               |   |           |    |    |    | 35 |    |
| Output signal                 | CANopen bus protocol with pre-adjustment Node-ID = 1, baudrate = 20 kbps           |                               |   |           |    |    |    |    | 52 |
|                               | CANopen bus protocol with pre-adjustment, Node-ID: 1, automatic baudrate detection |                               |   |           |    |    |    |    | 53 |
| Accessories                   | Female electrical plug M12x1, 5-pole   |                               |   |           |    |    |    |    | 33 |
|                               | Pressure peak damping element ø 1.0 mm   |                               |   |           |    |    |    |    | 40 |
|                               | Pressure peak damping element ø 0.3 mm   |                               |   |           |    |    |    |    | 43 |
|                               | Pressure peak damping element ø 0.5 mm   |                               |   |           |    |    |    |    | 45 |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Only with pressure connection 17 (G1/4") or 30 (1/4"NPT)

<sup>3)</sup> Only for relative pressure

<sup>4)</sup> Max. allowable pressure range 40 bar

<sup>5)</sup> Only for sensors 0.5 % accuracy (Ordering no. 25 and 45)




## Standard products (extra short lead time)


| Product No. | Type Code                       | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|---------------------------------|----------------------|--------------------------|--------------|--------------------------|
| CMP4.0M     | 8270 76 2517 35 0000 0000 52 43 | 0 ... 4              | 12                       | 8 ... 32     | ± 0.5                    |
| CMP6.0M     | 8270 77 2517 35 0000 0000 52 43 | 0 ... 6              | 12                       | 8 ... 32     | ± 0.5                    |
| CMP10.0M    | 8270 78 2517 35 0000 0000 52 43 | 0 ... 10             | 20                       | 8 ... 32     | ± 0.5                    |
| CMP16.0M    | 8270 79 2517 35 0000 0000 52 43 | 0 ... 16             | 32                       | 8 ... 32     | ± 0.5                    |
| CMP25.0M    | 8270 80 2517 35 0000 0000 52 43 | 0 ... 25             | 50                       | 8 ... 32     | ± 0.5                    |
| CMP40.0M    | 8270 81 2517 35 0000 0000 52 43 | 0 ... 40             | 80                       | 8 ... 32     | ± 0.5                    |
| CMP100.0M   | 8270 83 2517 35 0000 0000 52 43 | 0 ... 100            | 200                      | 8 ... 32     | ± 0.5                    |
| CMP250.0M   | 8270 74 2517 35 0000 0000 52 43 | 0 ... 250            | 500                      | 8 ... 32     | ± 0.5                    |
| CMP400.0M   | 8270 84 2517 35 0000 0000 52 43 | 0 ... 400            | 800                      | 8 ... 32     | ± 0.5                    |

## Dimensions

≤ 0 ... 2.5 bar




8270.XX.XX17.XX.XX.XX




8270.XX.XX30.XX.XX.XX


> 0 ... 2.5 bar




8270.XX.XX17.XX.XX.XX




8270.XX.XX30.XX.XX.XX




8270.XX.XX18.XX.XX.XX




8270.XX.XX24.XX.XX.XX





8270.XX.4417.XX.XX.XX



8270.XX.4430.XX.XX.XX



8270.XX.XXXX.35.XX.XX



8270.XX.XXXX.XX.XX.33

| Specifications                  |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Electrical Data</b>          | Output / supply voltage            | Bus protocol CANopen / 12/24 (8...32)VDC   |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure   |
|                                 | Current consumption                | ca. 20 mA  |
| <b>Environmental conditions</b> | Media temperature                  | -50°C ... +135°C   |
|                                 | Ambient temperature                | -40°C ... +125°C   |
|                                 | Protection <sup>1)</sup>           | Min. IP67  |
|                                 | Humidity                           | Max. 95 % relative   |
|                                 | Vibration                          | 40 g (20 ... 2000 Hz)  |
|                                 | Shock                              | 100 g / 11 ms  |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-4   |
|                                 | Immunity                           | EN/IEC 61000-6-2   |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4542 (AISI630)   |
|                                 | Pressure connection (wetted parts) | Pressure ranges ≤ 250 bar: 1.4542 (AISI630)<br>Pressure ranges > 250 bar: 1.4301 (AISI304) |
|                                 | Housing                            | 1.4301 (AISI304)   |
|                                 | Sealing                            | FKM 70 Sh  |
|                                 | Male electrical plug               | See ordering information   |
|                                 | Weight                             | ~ 60 g   |
|                                 | Mounting torque                    | 25 Nm  |

<sup>1)</sup> Provided female connector is mounted according to instructions

| Accuracy                              |               |   |  |   |
|---------------------------------------|---------------|---|--|---|
|                                       |               | Measuring accuracy<br>0.5 %<br>Ordering No. 25/45 | Measuring accuracy<br>0.15 %<br>Ordering No. 21/41 | Measuring accuracy<br>0.1 %<br>Ordering No. 24/44 |
| TEB @ -25 ... +85°C                   | [% FS typ.]   | ± 2.0   | ± 0.2  | ± 0.1   |
| Accuracy @ +25°C                      | [% FS typ.]   | ± 0.5   | ± 0.15   | ± 0.1   |
| NLH @ +25°C (BSL)                     | [% FS typ.]   | ± 0.3   | ± 0.15   | ± 0.1   |
| TC zero point and span                | [% FS/K typ.] | ± 0.03  | ± 0.002  | ± 0.002   |
| Long term stability 1 year<br>@ +25°C | [% FS typ.]   | < ± 0.2   | ± 0.1  | < ± 0.1   |
| <b>Signal of pressure sensor</b>      |               |   |  |   |
| Resolution                            |               | 11 bit @ 1 ms<br>13 bit @ ≥ 5 ms                  | 11 bit @ 1 ms<br>13 bit @ ≥ 5 ms                   | 11 bit @ 1 ms<br>13 bit @ ≥ 5 ms                  |
| Sampling rate (fix)                   |               | 1ms (1 kHz)                                       | 1ms (1 kHz)  | 1ms (1 kHz)                                       |
| Measuring filter (moving<br>average)  | [ms]          | 1 ... 65'000                                      | 1 ... 65'000                                       | 1 ... 65'000                                      |
| <b>Signal of temperature sensor</b>   |               |   |  |   |
| Total error @ -25 ... +85°C           | [°C typ.]     | not calibrated                                    | ± 1  | ± 1   |
| Sampling rate (fix)                   |               |   | 10x100 ms (1 Hz)                                   | 10x100 ms (1 Hz)                                  |
| Measuring filter (moving<br>average)  | [s]           |   | 0.1 ... 6500                                       | 0.1 ... 6500                                      |

## CANopen Features

- CiA conformance tested
- All CiA bus speeds: 10kbit/s...1Mbit/s
- Autobaud
- Supports 11/29 bit identifiers: CAN 2.0 A/B
- Frequency of measurement and transmission upto 1kHz
- Moving average filter: 1ms...65s (pressure)
- Additional PDO mode: delta and limit triggered
- All standardised data types for PDO's Floating point, integer with 32, 24, 16 bits
- Eligible, prefix adjustable units pressure: bar, Pa, psi, mmHg, mmWg, atm, at; temperature: °C, °F, K
- Auto-zero function
- Auto-Start-Mode for operation without master
- 4 Pressure - and 4 temperature thresholds with 8 free definable CAN messages
- Separate storage of parameters for communication and application
- Flash-Update
- Baudrate detection

## CANopen- Bus Protocol

- Output signal: CAN BUS (ISO 118982)
- CANopen: DS301 V4.0
- Device profile: DS404 V1.2
- Baudrate (Autobaude): 10kbit/s...1Mbit/s
- Error control: Nodeguarding, Heartbeat
- Node ID: LSS (DSP 305 V2.0) fully implemented, proprietary
- No. of PDO's: 4 TX
- PDO modes: event-/time-triggered, remotely requested, sync (cyclic/acyclic)
- PDO linking: yes
- PDO mapping: yes
- No. of SDO's: 1 server
- Emergency message: yes

## Additional information

| Documents |              |  |
|-----------|--------------|--|
|           | Data sheet   | <a href="http://www.trafag.com/H72614">www.trafag.com/H72614</a> |
|           | Instructions | <a href="http://www.trafag.com/H73614">www.trafag.com/H73614</a> |
|           | Flyer        | <a href="http://www.trafag.com/H70653">www.trafag.com/H70653</a> |

# NAVITRAG

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Engine manufacturing



## Features



- Excellent long-term stability
- Protection IP65
- EMC protection, IEC 61000
- Excellent resistance to pressure peaks and dynamic pressure changes

### Technical Data

|                      |                            |                       |                                      |
|----------------------|----------------------------|-----------------------|--------------------------------------|
| Measuring principle  | Thin film on steel         | Media temperature     | -25°C ... +125°C                     |
| Measuring range      | 0 ... 1.0 to 0 ... 600 bar | Ambient temperature   | -25°C ... +85°C                      |
| Output signal        | 4 ... 20 mA                | Approval / conformity | ABS, BV, CCS, DNV-GL, KRS, LRS, RINA |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ.            |                       |                                      |

Subject to change

## Ordering information/type code

|                               |   |               |                | 8202 . | XX | XX | XX | XX | XX |
|-------------------------------|---|---------------|----------------|--------|----|----|----|----|----|
| Measuring range <sup>1)</sup> | Pressure measurement range  | Over pressure | Burst pressure |        |    |    |    |    |    |
|                               | [bar]   | [bar]         | [bar]          |        |    |    |    |    |    |
|                               | 0 ... 1.0   | 3             | 100            | 71     |    |    |    |    |    |
|                               | 0 ... 1,6   | 3             | 100            | 73     |    |    |    |    |    |
|                               | 0 ... 2.5   | 6             | 100            | 75     |    |    |    |    |    |
|                               | 0 ... 4   | 10            | 100            | 76     |    |    |    |    |    |
|                               | 0 ... 6   | 15            | 100            | 77     |    |    |    |    |    |
|                               | 0 ... 10  | 20            | 200            | 78     |    |    |    |    |    |
|                               | 0 ... 16  | 32            | 200            | 79     |    |    |    |    |    |
|                               | 0 ... 25  | 80            | 300            | 80     |    |    |    |    |    |
|                               | 0 ... 40  | 80            | 300            | 81     |    |    |    |    |    |
|                               | 0 ... 60  | 200           | 500            | 82     |    |    |    |    |    |
|                               | 0 ... 100   | 200           | 500            | 83     |    |    |    |    |    |
|                               | 0 ... 160   | 500           | 1000           | 85     |    |    |    |    |    |
|                               | 0 ... 250   | 500           | 1000           | 74     |    |    |    |    |    |
|                               | 0 ... 400   | 800           | 1500           | 84     |    |    |    |    |    |
|                               | 0 ... 600   | 1000          | 2000           | 86     |    |    |    |    |    |
| Sensor                        | relative  |               |                |        |    |    |    |    | 22 |
|                               | absolute  |               |                |        |    |    |    |    | 26 |
| Pressure connection           | G1/4" female  |               |                |        |    |    |    |    | 10 |
|                               | G1/2" male  |               |                |        |    |    |    |    | 11 |
| Fixing                        | Wall mounting bracket   |               |                |        |    |    |    |    | 31 |
| Accessories                   |  Connector with marine cable gland DIN89280, M24x1.5 (Cable-ø 14...16.5) |               |                |        |    |    |    |    | 27 |
|                               |  Connector with marine cable gland DIN89280, M18x1.5 (Cable-ø 8...10.5)  |               |                |        |    |    |    |    | 40 |
|                               | Cable gland for screened cable, Cable ø 6...12mm  |               |                |        |    |    |    |    | 28 |
|                               | Damping elements and Snubber: See specification sheet H72258  |               |                |        |    |    |    |    |    |


<sup>1)</sup> Customized pressure ranges upon request

## Standard products (extra short lead time)

| Product No. | Type Code    | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|--------------|----------------------|--------------------------|--------------|--------------------------|
| N1.0        | 8202 71 2210 | 0...1                | 3                        | 12...34      | ± 0.5                    |
| N2.5        | 8202 75 2210 | 0...2.5              | 6                        | 12...34      | ± 0.5                    |
| N4.0        | 8202 76 2210 | 0...4                | 10                       | 12...34      | ± 0.5                    |
| N6.0        | 8202 77 2210 | 0...6                | 15                       | 12...34      | ± 0.5                    |
| N10.0       | 8202 78 2210 | 0...10               | 20                       | 12...34      | ± 0.5                    |
| N16.0       | 8202 79 2210 | 0...16               | 32                       | 12...34      | ± 0.5                    |
| N25.0       | 8202 80 2210 | 0...25               | 80                       | 12...34      | ± 0.5                    |
| N40.0       | 8202 81 2210 | 0...40               | 80                       | 12...34      | ± 0.5                    |
| N100.0      | 8202 83 2210 | 0...100              | 200                      | 12...34      | ± 0.5                    |
| N250.0      | 8202 74 2210 | 0...250              | 500                      | 12...34      | ± 0.5                    |
| N400.0      | 8202 84 2210 | 0...400              | 800                      | 12...34      | ± 0.5                    |


| Specifications                  |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Accuracy</b>                 | TEB typ. @ -25 ... +85°C           | ± 2 % FS typ.                                    |
|                                 | Accuracy @ 25°C typ.               | ± 0.5 % FS typ.                                  |
|                                 | NLH @ 25°C (BSL) typ.              | ± 0.3 % FS typ.                                  |
|                                 | TC zero point and span typ.        | ± 0.02 % FS/K typ.                               |
|                                 | Long term stability 1 year typ.    | ± 0.2 % FS typ.                                  |
| <b>Electrical Data</b>          | Output / supply voltage            | 4 ... 20 mA; 24 (12 ... 34) VDC                  |
|                                 | Load                               | $U_{\text{supply}} - 12\text{V} / 20 \text{ mA}$ |
|                                 | Rise time                          | typ. 1 ms/10...90 % nominal pressure             |
| <b>Environmental conditions</b> | Media temperature                  | -25°C ... +125°C                                 |
|                                 | Ambient temperature                | -25°C ... +85°C                                  |
|                                 | Protection                         | Min. IP65  |
|                                 | Humidity                           | Max. 95 % relative                               |
|                                 | Vibration                          | 6g (25...2000 Hz)                                |
|                                 | Shock                              | 50g/ 11 ms                                       |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-3                                 |
|                                 | Immunity                           | EN/IEC 61000-6-2                                 |
| <b>Mechanical Data</b>          | Electrical connections             | Terminal screw 0.75 ... 2.5 mm <sup>2</sup>      |
|                                 | Screwed cable gland                | M20x1.5<br>Cable-Ø 6...13 mm                     |
|                                 | Sensor (wetted parts)              | 1.4542 (AISI630)                                 |
|                                 | Pressure connection (wetted parts) | 1.4542 (AISI630)                                 |
|                                 | Housing                            | AlSi10Mg/ Epoxy coated                           |
|                                 | Sealing                            | NBR 70 Sh  |
|                                 | Weight                             | ~ 520 g  |
|                                 | Mounting torque                    | 25 Nm  |

## Electrical Connection




| Additional information |              |  |
|------------------------|--------------|--|
| <b>Documents</b>       | Data sheet   | <a href="http://www.trafag.com/H72206">www.trafag.com/H72206</a> |
|                        | Instructions | <a href="http://www.trafag.com/H70722">www.trafag.com/H70722</a> |
|                        | Flyer        | <a href="http://www.trafag.com/H70677">www.trafag.com/H70677</a> |


## Dimensions

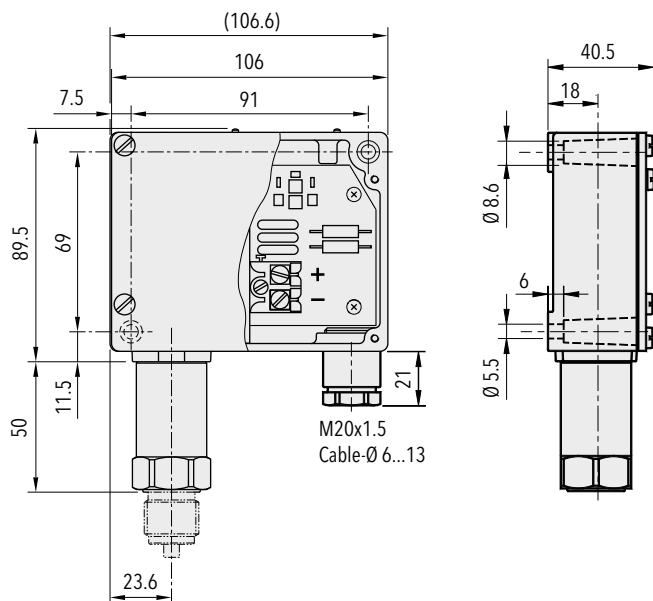


8202.XX.XXXX.XX.XX

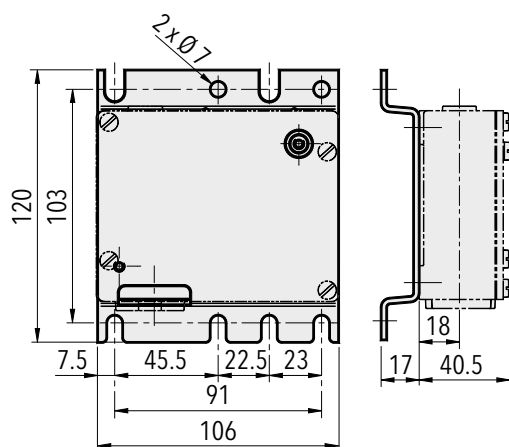

8202.XX.XXXX.31.XX



8202.XX.XXXX.XX.27



8202.XX.XXXX.XX.40

# DIFFERENTIAL PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Engine manufacturing

## Features

- High zero point stability
- High resistance to pressure cycling
- EMC protection, IEC 61000



### Technical Data

|                      |                         |                       |                  |
|----------------------|-------------------------|-----------------------|------------------|
| Measuring principle  | Thin film on steel      | Media temperature     | -25°C ... +125°C |
| Measuring range      | 0 ... 1 to 0 ... 16 bar | Ambient temperature   | -25°C ... +85°C  |
| Output signal        | 4 ... 20 mA (P1-P2)     | Approval / conformity | BV, DNV, RINA    |
| Accuracy @ 25°C typ. | ± 0.8 % FS typ          |                       |                  |

Subject to change



## Ordering information/type code

|                                      |   |                                      |                                       | 8204 . XX | XXXX | XX | XX |
|--------------------------------------|---|--------------------------------------|---------------------------------------|-----------|------|----|----|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range [bar]</b>   | <b>Maximum system pressure [bar]</b> | <b>Overpressure on one side [bar]</b> |           |      |    |    |
|                                      | 0 ... 1.0   | 2.5                                  | 6                                     | 71        |      |    |    |
|                                      | -1 ... 1.5  | 6                                    | 15                                    | 55        |      |    |    |
|                                      | 0 ... 2.5   | 6                                    | 15                                    | 75        |      |    |    |
|                                      | -1 ... 5  | 16                                   | 32                                    | 58        |      |    |    |
|                                      | 0 ... 6   | 16                                   | 32                                    | 77        |      |    |    |
|                                      | 0 ... 10  | 40                                   | 80                                    | 78        |      |    |    |
|                                      | 0 ... 16  | 40                                   | 80                                    | 79        |      |    |    |
| <b>Pressure connection</b>           | G1/4" female  |                                      |                                       | 2210      |      |    |    |
| <b>Fixing</b>                        | Fixing Standard   |                                      |                                       |           |      |    | 00 |
|                                      | Wall mounting bracket   |                                      |                                       |           |      |    | 31 |
| <b>Accessories</b>                   |  Connector with marine cable gland DIN89280, M24x1.5 (Cable-ø 14...16.5) |                                      |                                       |           |      |    | 27 |
|                                      |  Connector with marine cable gland DIN89280, M18x1.5 (Cable-ø 8...10.5)  |                                      |                                       |           |      |    | 40 |
|                                      | Damping elements and Snubber: See specification sheet H72258  |                                      |                                       |           |      |    |    |

<sup>1)</sup> Customized pressure ranges upon request


## Standard products (extra short lead time)

| Product No. | Type Code    | Differential pressure (measuring range) [bar] | Maximum system pressure [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|--------------|---|-------------------------------|--------------------------|--------------|--------------------------|
| ND1.0       | 8204 71 2210 | 0 ... 1.0                                     | 2.5                           | 6                        | 12 ... 34    | ± 0.8                    |
| ND1.5       | 8204 55 2210 | -1 ... 1.5                                    | 6                             | 15                       | 12 ... 34    | ± 0.8                    |
| ND2.5       | 8204 75 2210 | 0 ... 2.5                                     | 6                             | 15                       | 12 ... 34    | ± 0.8                    |
| ND5         | 8204 58 2210 | -1 ... 5.0                                    | 16                            | 32                       | 12 ... 34    | ± 0.8                    |
| ND6         | 8204 77 2210 | 0 ... 6.0                                     | 16                            | 32                       | 12 ... 34    | ± 0.8                    |


| Specifications                  |                                    |   |
|---------------------------------|------------------------------------|---|
| <b>Accuracy</b>                 | TEB typ. @ -25 ... +85°C           | ± 3.5 % FS typ.                               |
|                                 | Accuracy @ 25°C typ.               | ± 0.8 % FS typ.                               |
|                                 | NLH @ 25°C (BSL) typ.              | ± 0.5 % FS typ.                               |
|                                 | TC zero point and span typ.        | ± 0.04 % FS/K typ.                            |
|                                 | Long term stability 1 year typ.    | ± 0.4 % FS typ.                               |
| <b>Electrical Data</b>          | Output / supply voltage            | 4 ... 20 mA; 24 (12 ... 34) VDC               |
|                                 | Load                               | $U_{\text{supply}} - 12\text{V}/20\text{ mA}$ |
|                                 | Rise time                          | typ. 1 ms/10...90 % nominal pressure          |
| <b>Environmental conditions</b> | Media temperature                  | -25°C ... +125°C                              |
|                                 | Ambient temperature                | -25°C ... +85°C                               |
|                                 | Protection <sup>1)</sup>           | Min. IP65                                     |
|                                 | Humidity                           | Max. 95 % relative                            |
|                                 | Vibration                          | 6g (25...2000 Hz)                             |
|                                 | Shock                              | 50g/ 1 ms                                     |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-3                              |
|                                 | Immunity                           | EN/IEC 61000-6-2                              |
| <b>Mechanical Data</b>          | Electrical connections             | Terminal screw 0.75 ... 2.5 mm <sup>2</sup>   |
|                                 | Screwed cable gland                | M20x1.5<br>Cable-Ø 6...13 mm                  |
|                                 | Sensor (wetted parts)              | 1.4542 (AISI630)                              |
|                                 | Pressure connection (wetted parts) | 1.4542 (AISI630)                              |
|                                 | Housing                            | AlSi10Mg/ Epoxy coated                        |
|                                 | Sealing                            | NBR 70 Sh                                     |
|                                 | Weight                             | ~ 720 g                                       |
|                                 | Mounting torque                    | 25 Nm   |

<sup>1)</sup> Provided female connector is mounted according to instructions

## Electrical Connection



## Functional diagram



$\Delta p$  = Differential Pressure  
 $P_1$  = Higher pressure  
 $P_2$  = Lower pressure  
 $P$  = System pressure



# EX PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The EX pressure transmitter EXNT is based on Trafag's own thin-film-on-steel sensor technology with excellent long-term stability and offers reliable and accurate pressure measurement over a wide temperature range. The intrinsic safety design is certified for applications in Ex-Zones 0, 1, 2 (gas), 20, 21, 22 (dust) and mining.



## Applications

- Shipbuilding
- Ex Zones 0, 1, 2 (gas); 20, 21, 22 (dust) and mining
- Hydrogen

## Features

- - II 1G Ex ia IIC T4/T6 Ga
  - II 1D Ex ia IIIC T130° Da
  - I M1 Ex ia I Ma
  - II 1/2G Ex ia IIC T4/T6 Ga/Gb (with plastic-type connector)
- Pressure ranges from 0.4 to 2000 bar
- Completely welded sensor system
- Optional with hydrogen-compatible sensor
- ATEX and IECEx

## Technical Data

|                      |   |                       |  |
|----------------------|---|-----------------------|--|
| Measuring principle  | Thin film on steel  | Media temperature     | Max. -40°C ... +120°C<br>(see electrical connection)   |
| Measuring range      | 0 ... 0.4 to 0 ... 2000 bar<br>0 ... 5 to 0 ... 30000 psi | Ambient temperature   | Max. -40°C ... +120°C<br>(see electrical connection)   |
| Output signal        | 4 ... 20 mA   | Approval / conformity | GL, KRS<br>ATEX / IECEx, according to the norm<br>EN/IEC 60079-0/EN 60079-11/<br>EN 60079-26/ EN 50303 |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ.<br>± 0.3 % FS typ.                        |                       |  |

Subject to change

## Ordering information/type code

|                                      |   |                            |                             | 8292 . XX                               | XX                         | XX                          | XX        | XX | XX |  |
|--------------------------------------|---|----------------------------|-----------------------------|---|----------------------------|-----------------------------|-----------|----|----|--|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range [bar]</b>   | <b>Over pressure [bar]</b> | <b>Burst pressure [bar]</b> | <b>Pressure measurement range [psi]</b> | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |           |    |    |  |
|                                      | 0 ... 0.4 <sup>2)</sup>   | 1.2                        | 25                          | 0 ... 5 <sup>2)</sup>                   | 18                         | 350                         | <b>F9</b> |    |    |  |
|                                      | 0 ... 0.6 <sup>2)</sup>   | 1.5                        | 25                          | 0 ... 10 <sup>2)</sup>                  | 25                         | 350                         | <b>G0</b> |    |    |  |
|                                      | 0 ... 1.0 <sup>2)</sup>   | 2.0                        | 25                          | 0 ... 15 <sup>2)</sup>                  | 30                         | 350                         | <b>G1</b> |    |    |  |
|                                      | 0 ... 1.6   | 3.5                        | 80                          | 0 ... 25                                | 50                         | 1200                        | <b>G3</b> |    |    |  |
|                                      | 0 ... 2.5   | 5                          | 100                         | 0 ... 30                                | 30                         | 720                         | <b>G5</b> |    |    |  |
|                                      | 0 ... 4   | 8                          | 100                         | 0 ... 50                                | 120                        | 860                         | <b>G6</b> |    |    |  |
|                                      | 0 ... 6   | 12                         | 100                         | 0 ... 100                               | 170                        | 1450                        | <b>G7</b> |    |    |  |
|                                      | 0 ... 10  | 20                         | 200                         | 0 ... 150                               | 290                        | 2900                        | <b>G8</b> |    |    |  |
|                                      | 0 ... 16  | 32                         | 200                         | 0 ... 250                               | 460                        | 2900                        | <b>G9</b> |    |    |  |
|                                      | 0 ... 25  | 50                         | 300                         | 0 ... 400                               | 730                        | 4350                        | <b>H0</b> |    |    |  |
|                                      | 0 ... 40  | 80                         | 300                         | 0 ... 500                               | 1160                       | 4350                        | <b>H1</b> |    |    |  |
|                                      | 0 ... 60  | 120                        | 500                         | 0 ... 1000                              | 1740                       | 5800                        | <b>H2</b> |    |    |  |
|                                      | 0 ... 100   | 200                        | 500                         | 0 ... 1500                              | 2900                       | 7250                        | <b>H3</b> |    |    |  |
|                                      | 0 ... 160   | 320                        | 1000                        | 0 ... 2000                              | 4640                       | 10850                       | <b>H5</b> |    |    |  |
|                                      | 0 ... 250   | 500                        | 1000                        | 0 ... 3000                              | 7250                       | 14500                       | <b>G4</b> |    |    |  |
|                                      | 0 ... 400   | 800                        | 1500                        | 0 ... 5000                              | 11600                      | 21750                       | <b>H4</b> |    |    |  |
|                                      | 0 ... 600   | 1000                       | 2000                        | 0 ... 7500                              | 14500                      | 29000                       | <b>H6</b> |    |    |  |
|                                      | 0 ... 1000 <sup>9)</sup>  | 1600                       | 3000                        | 0 ... 15000 <sup>9)</sup>               | 25000                      | 45000                       | <b>H8</b> |    |    |  |
|                                      | 0 ... 1600  | 3000                       | 4000                        | 0 ... 25000                             | 45000                      | 60000                       | <b>H9</b> |    |    |  |
| 0 ... 2000                           | 3000  | 4000                       | 0 ... 30000                 | 45000                                   | 60000                      | <b>J0</b>                   |           |    |    |  |
| <b>Sensor</b>                        | Relative pressure, accuracy: 0.3% (> 1 bar)   |                            |                             |   |                            |                             | <b>23</b> |    |    |  |
|                                      | Relative pressure, accuracy: 0.5% (> 1 bar)   |                            |                             |   |                            |                             | <b>25</b> |    |    |  |
|                                      | Relative pressure, accuracy: 0.5% (≤ 1 bar)   |                            |                             |   |                            |                             | <b>26</b> |    |    |  |
|                                      | Relative pressure, accuracy: 0.5 %, wetted parts hydrogen compatible <sup>7) 8)</sup>   |                            |                             |   |                            |                             | <b>35</b> |    |    |  |
|                                      | Relative pressure, accuracy: 0.3 %, wetted parts hydrogen compatible <sup>7) 8)</sup>   |                            |                             |   |                            |                             | <b>33</b> |    |    |  |
| <b>Pressure connection</b>           | G1/4" male <sup>3)</sup>  |                            |                             |   |                            |                             | <b>17</b> |    |    |  |
|                                      | G1/4" male (Manometer) EN 871 <sup>3) 8)</sup>  |                            |                             |   |                            |                             | <b>53</b> |    |    |  |
|                                      | G1/4" female <sup>3) 8)</sup>   |                            |                             |   |                            |                             | <b>10</b> |    |    |  |
|                                      | G1/2" male <sup>3) 8)</sup>   |                            |                             |   |                            |                             | <b>21</b> |    |    |  |
|                                      | G1/2" male (Manometer) <sup>3) 8)</sup>   |                            |                             |   |                            |                             | <b>11</b> |    |    |  |
|                                      | R1/4" male <sup>3) 8)</sup>   |                            |                             |   |                            |                             | <b>19</b> |    |    |  |
|                                      | 1/4" NPT male <sup>3) 8)</sup>  |                            |                             |   |                            |                             | <b>30</b> |    |    |  |
|                                      | M18x1.5 male (conical seal: 58°) <sup>4) 8)</sup>   |                            |                             |   |                            |                             | <b>29</b> |    |    |  |
| <b>Electrical connection</b>         | Male electrical plug EN 175301-803-A, plastic (only zones 1, 2 (gas) and 20, 21 (dust))   |                            |                             |   |                            |                             | <b>05</b> |    |    |  |
|                                      | Male electrical plug M12x1, 5-pole, metal   |                            |                             |   |                            |                             | <b>35</b> |    |    |  |
|                                      | Male electrical plug MIL-C 26482, 6-pole, metal <sup>5)</sup>   |                            |                             |   |                            |                             | <b>02</b> |    |    |  |
|                                      | Male electrical plug Binder 723, 5-pole, metal  |                            |                             |   |                            |                             | <b>14</b> |    |    |  |
|                                      | Cable with shield, material FDR 25 (Raychem), 4 x 0.5mm <sup>2</sup> (cable length see "Accessories") - not ship approved                       |                            |                             |   |                            |                             | <b>78</b> |    |    |  |
|                                      | Cable intrinsically safe with shield, material PVC, 2 x 0.75mm <sup>2</sup> (-40...+80°C), (cable length see "Accessories") - not ship approved |                            |                             |   |                            |                             | <b>80</b> |    |    |  |
| <b>Output signal</b>                 | <b>Signal output</b>  | <b>Load resistance</b>     | <b>I (supply)</b>           | <b>U (supply)</b>                       |                            |                             |           |    |    |  |
|                                      | 4 ... 20 mA   | (Usupply-10 V) / 20 mA     |                             | 10 ... 30 VDC                           | <b>19</b>                  |                             |           |    |    |  |

|                    |  |    |
|--------------------|--|----|
| <b>Accessories</b> | Female electrical connector EN 175301-803-A (DIN43650-A), plastic (only zones 1, 2 (gas) and 20, 21 (dust))                                  | 58 |
|                    | Female electrical plug M12x1, 5-pole, plastic (only zones 1, 2 (gas) and 20, 21 (dust))  | 33 |
|                    | Female electrical plug M12x1, 5-pole, metal  | 35 |
|                    | Female electrical connector MIL-C 26482, 6-pole, metal   | 32 |
|                    | Female electrical connector Binder 723, 5-pole, metal  | 37 |
|                    | Pressure peak damping element $\varnothing$ 0.4 mm   | 44 |
|                    | Pressure peak damping element $\varnothing$ 1.0 mm   | 40 |
|                    | Cable length 1.5 m <sup>6)</sup>   | 1M |
|                    | Cable length 3.0 m <sup>6)</sup>   | 3M |
|                    | Cable length 5.0 m <sup>6)</sup>   | 5M |
|                    | Special electrical connection: Pin 1 +, Pin 2 -<br>(only for output signal 4 ... 20 mA and male electrical plug EN175301-803-A / DIN43650-A) | 92 |
|                    | Zener barrier 28V/93mA; R $\approx$ 300 $\Omega$ ; Ordering no ZEN28VDC  |    |
|                    | Damping elements and snubber see data sheet H72258   |    |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Only with sensor 26 (0.5%)

<sup>3)</sup> For pressure ranges  $\leq$  600 bar

<sup>4)</sup> For pressure ranges  $>$  600 bar

<sup>5)</sup> For pressure ranges  $<$  40 bar upon request

<sup>6)</sup> Other cable lengths upon request

<sup>7)</sup> Pressure ranges 0 ... 40 to 0 ... 1000 bar

<sup>8)</sup> Upon request

<sup>9)</sup> With sensors 33 and 35: Overpressure 1300 bar/19000 psi, Burst pressure 2600 bar/38000 psi

## Standard products (extra short lead time)


| Product No. | Type Code                          | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|------------------------------------|----------------------|--------------------------|--------------|--------------------------|
| EXNT0.4A    | 8292 69 2617 05 0000 0000 19 58 92 | 0 ... 0.4            | 1.2                      | 10 ... 30    | $\pm$ 0.5                |
| EXNT0.6A    | 8292 70 2617 05 0000 0000 19 58 92 | 0 ... 0.6            | 1.5                      | 10 ... 30    | $\pm$ 0.5                |
| EXNT1.0A    | 8292 71 2617 05 0000 0000 19 58 92 | 0 ... 1              | 2                        | 10 ... 30    | $\pm$ 0.5                |
| EXNT2.5A    | 8292 75 2517 05 0000 0000 19 58 92 | 0 ... 2.5            | 5                        | 10 ... 30    | $\pm$ 0.5                |
| EXNT4.0A    | 8292 76 2517 05 0000 0000 19 58 92 | 0 ... 4              | 8                        | 10 ... 30    | $\pm$ 0.5                |
| EXNT6.0A    | 8292 77 2517 05 0000 0000 19 58 92 | 0 ... 6              | 12                       | 10 ... 30    | $\pm$ 0.5                |
| EXNT10.0A   | 8292 78 2517 05 0000 0000 19 58 92 | 0 ... 10             | 20                       | 10 ... 30    | $\pm$ 0.5                |
| EXNT16.0A   | 8292 79 2517 05 0000 0000 19 58 92 | 0 ... 16             | 32                       | 10 ... 30    | $\pm$ 0.5                |
| EXNT25.0A   | 8292 80 2517 05 0000 0000 19 58 92 | 0 ... 25             | 50                       | 10 ... 30    | $\pm$ 0.5                |
| EXNT40.0A   | 8292 81 2517 05 0000 0000 19 58 92 | 0 ... 40             | 80                       | 10 ... 30    | $\pm$ 0.5                |
| EXNT100.0A  | 8292 83 2517 05 0000 0000 19 58 92 | 0 ... 100            | 200                      | 10 ... 30    | $\pm$ 0.5                |
| EXNT250.0A  | 8292 74 2517 05 0000 0000 19 58 92 | 0 ... 250            | 500                      | 10 ... 30    | $\pm$ 0.5                |

| Specifications                  |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Electrical Data</b>          | Output / supply voltage            | 4 ... 20 mA; 24 (10 ... 30) VDC  |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure   |
|                                 | Switch-on-delay                    | Max. 1.5 s   |
| <b>Environmental conditions</b> | Media temperature                  | Max. -40°C ... +120°C<br>(see electrical connection)   |
|                                 | Ambient temperature                | Max. -40°C ... +120°C<br>(see electrical connection)   |
|                                 | Protection <sup>1)</sup>           | Min. IP65<br>Electrical connection cable: IP67<br>Electrical connection 02: IP67   |
|                                 | Humidity                           | Max. 95 % relative   |
|                                 | Vibration                          | 10 g (50...2000 Hz)  |
|                                 | Shock                              | 50 g / 3 ms  |
| <b>EMC Protection</b>           | Emission                           | IEC 61000-6-4  |
|                                 | Immunity                           | IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4542 (AISI630), optional hydrogen-compatible steel   |
|                                 | Pressure connection (wetted parts) | Pressure ranges ≤ 250 bar and > 600 bar:<br>1.4542 (AISI630)<br>Pressure ranges > 250 bar and ≤ 600 bar:<br>1.4301 (AISI304)<br>Optional hydrogen-compatible steel |
|                                 | Housing                            | 1.4301 (AISI304)   |
|                                 | Sealing                            | FKM 70 Sh  |
|                                 | Male electrical plug               | See ordering information   |
|                                 | Weight                             | ~ 165 g  |
|                                 | Mounting torque                    | 25 Nm<br>Pressure connection 29: 30 Nm   |


<sup>1)</sup> See electrical connection

| Accuracy  |               |   |   |   |
|---|---------------|---|---|---|
|   |               | Class 0.5 %<br>Ordering No. 25<br>(> 1 bar) | Class 0.3 %<br>Ordering No. 23<br>(> 1 bar) | Class 0.5 %<br>Ordering No. 26<br>(≤ 1 bar)                     |
| TEB @ -25...+85°C   | [% FS typ.]   | ± 2.0                                       | ± 0.5                                       | ± 1.0   |
| Accuracy @ +25°C  | [% FS typ.]   | ± 0.5                                       | ± 0.3                                       | ± 0.5   |
| NLH @ +25°C (BSL)   | [% FS typ.]   | ± 0.2                                       | ± 0.1                                       | ± 0.10  |
| TC zero point and span  | [% FS/K typ.] | ± 0.03                                      | ± 0.005                                     | ± 0.01  |
| Long term stability 1 year @ +25°C  | [% FS typ.]   | ± 0.2                                       | ± 0.2                                       | ± 0.2   |
| Mounting dependency with 180° rotation<br>(Vibration and shock: multiply this value with number of g) | [% FS typ.]   | -   | -   | 0 ... 1 bar: 0.05<br>0 ... 0.6 bar: 0.09<br>0 ... 0.4 bar: 0.13 |

## Class 0.5 %

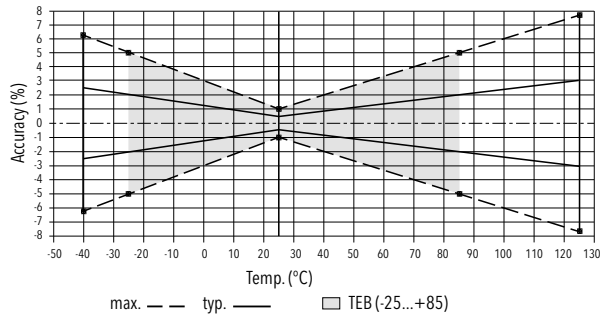

## Class 0.3 %

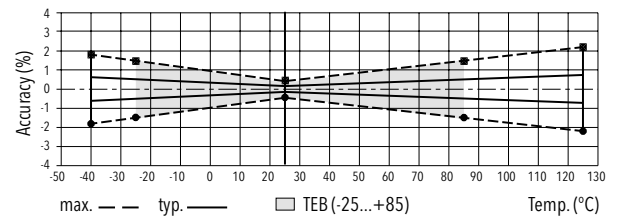

## Electrical connection

|               |                                  | Protection / electrical connection   |   |  |                             |                |                 |             |
|---------------|----------------------------------|--------------------------------------|---|--|-----------------------------|----------------|-----------------|-------------|
|               |                                  | IP65*)                               | IP67                                    | IP67   | IP65*)                      | IP67*)         | IP65*)          |             |
|               |                                  | Industrial standard<br>EN175301-803A | Cable **)<br>(4 x 0.5 mm <sup>2</sup> ) | Cable **)<br>(2 x 0.75 mm <sup>2</sup> )                       | Binder 723                  | MIL-C 26482    | M12x1<br>5-pole |             |
|               |                                  | <b>05</b>                            | <b>78</b><br>Shield                     | <b>80</b><br>Shield  | <b>14</b>                   | <b>02</b>      | <b>35</b>       |             |
|               |                                  |                                      |   |  |                             |                |                 |             |
| Output signal |                                  | Standard<br>2<br>1<br>⊖              | <b>92</b><br>1<br>2<br>⊖                | brown<br>black<br>yellow / green<br><br>(blue = not connected) | 1 (black)<br>2 (black)<br>- | 3<br>1<br>5    | A<br>C<br>F     | 4<br>1<br>5 |
|               | <b>8292 .XX.XXXX.XX.19</b>       |                                      |   |  |                             |                |                 |             |
| T-Range       | Ambient and media temperature T4 | -40 ... +120°C                       | -40 ... +120°C                          | -40 ... +80°C  | -30 ... +95°C               | -40 ... +120°C | -40 ... +120°C  |             |
|               | Ambient and media temperature T6 | -40 ... +65°C                        | -40 ... +65°C                           | -40 ... +65°C  | -30 ... +65°C               | -40 ... +65°C  | -40 ... +65°C   |             |

\*) Provided female connector is mounted according to instructions

\*\*) Ventilation via cable end

\*\*\*) Only cable versions or female electrical plug with shield connection


### Additional information

#### Documents


|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72329">www.trafag.com/H72329</a> |
| Instructions | <a href="http://www.trafag.com/H73329">www.trafag.com/H73329</a> |
| Flyer        | <a href="http://www.trafag.com/H70657">www.trafag.com/H70657</a> |




## Dimensions




**8292.XX.XX10.XX.XX.XX**  
(≤ 600 bar)




**8292.XX.XX17.XX.XX.XX**  
(≤ 600 bar)




**8292.XX.XX53.XX.XX.XX**




**8292.XX.XX21.XX.XX.XX**  
(≤ 600 bar)




**8292.XX.XX11.XX.XX.XX**  
(≤ 600 bar)




**8292.XX.XX19.XX.XX.XX**  
(≤ 600 bar)




**8292.XX.XX30.XX.XX.XX**  
(≤ 600 bar)




**8292.XX.XX29.XX.XX.XX**  
(> 600 bar)

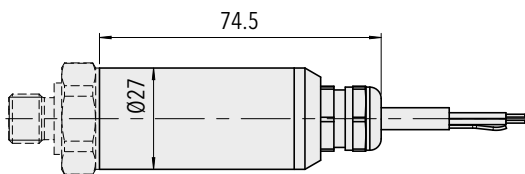

**8292.XX.XXXX.78/80.XX.XX**

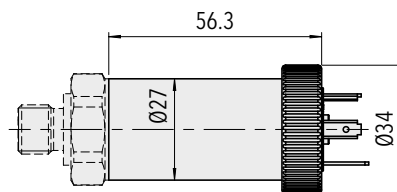


**8292.XX.XXXX.05.XX.XX**





1) Tightening to torque 50...60Nm



**8292.XX.XXXX.XX.XX.58**

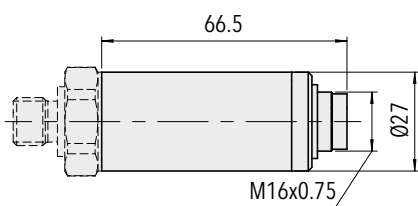


**8292.XX.XXXX.14.XX.37**

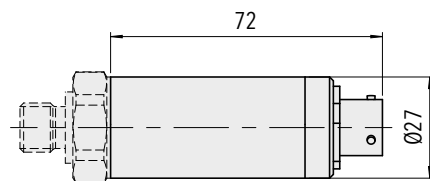

**8292.XX.XXXX.02.XX.32**

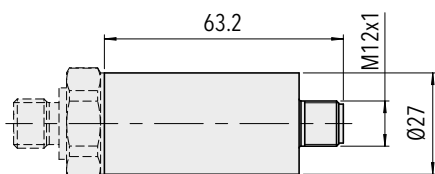

**8292.XX.XXXX.35.XX.XX**



**8292.XX.XXXX.XX.XX.33/35**

# EX PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The intrinsically safe EX pressure transmitter EXNA 8854 is certified to ATEX and IECEx for applications in Ex-Zones 0, 1, 2 (gas), 20, 21, 22 (dust) and mining. Due to the wide range of variants and pressure ranges from 0.1 to 1000 bar it can be configured for almost any application appropriately.



## Applications

- Ex Zone 0, 1, 2 / Gas
- Ex Zone 20, 21, 22 / Dust
- Ex Underground Mining

## Features

- Ex ATEX / IECEx
- Pressure ranges from 100 mbar
- Versions with frontal flush diaphragm
- Media temperature to 150°C
- EMC protection, IEC 61000

| Technical Data      |   |                       |  |
|---------------------|---|-----------------------|--|
| Measuring principle | Piezoresistive  | Ambient temperature   | T3: -40°C ... +125°C<br>T4: -40°C ... +85°C<br>T6: -40°C ... +50°C                     |
| Measuring range     | 0 ... 0.1 to 0 ... 1000 bar   | Approval / conformity | DNV-GL<br>Ex according to standards, IEC/EN 60079-0 /-11/-26, EN 50303                 |
| Output signal       | 4 ... 20 mA   | Type of protection    | ⊕ II 1G Ex ia IIC T3 ... T6 Ga<br>II 1D Ex ia IIIC IP6x T145 ... T70°C<br>I M1 Ex ia I |
| Media temperature   | T3: -40°C ... +150°C<br>T4: -40°C ... +100°C<br>T6: -40°C ... +50°C |                       |  |

Subject to change

## Ordering information/type code

|  |  |   |                             | 8854 . XX         | XX         | XX   | XX   | XX        | XX        |           |
|--|--|---|-----------------------------|-------------------|------------|------|------|-----------|-----------|-----------|
| <b>Measuring range</b> <sup>1)</sup>           | <b>Pressure measurement range [bar]</b>                  | <b>Over pressure [bar]</b>                      | <b>Burst pressure [bar]</b> |                   |            |      |      |           |           |           |
|  | 0 ... 0.1  | 3   | 200                         | <b>66</b>         | 0 ... 16   | 48   | 200  | <b>79</b> |           |           |
|  | 0 ... 0.16   | 3   | 200                         | <b>67</b>         | 0 ... 25   | 75   | 200  | <b>80</b> |           |           |
|  | 0 ... 0.2  | 3   | 200                         | <b>68</b>         | 0 ... 40   | 120  | 850  | <b>81</b> |           |           |
|  | 0 ... 0.4  | 3   | 200                         | <b>69</b>         | 0 ... 60   | 180  | 850  | <b>82</b> |           |           |
|  | 0 ... 0.6  | 3   | 200                         | <b>70</b>         | 0 ... 100  | 300  | 850  | <b>83</b> |           |           |
|  | 0 ... 1  | 3   | 200                         | <b>71</b>         | 0 ... 160  | 480  | 850  | <b>85</b> |           |           |
|  | 0 ... 1.6  | 4.8   | 200                         | <b>73</b>         | 0 ... 250  | 750  | 850  | <b>74</b> |           |           |
|  | 0 ... 2.5  | 7.5   | 200                         | <b>75</b>         | 0 ... 400  | 850  | 1500 | <b>84</b> |           |           |
|  | 0 ... 4  | 12  | 200                         | <b>76</b>         | 0 ... 600  | 850  | 1500 | <b>86</b> |           |           |
|  | 0 ... 6  | 18  | 200                         | <b>77</b>         | 0 ... 1000 | 1500 | 1500 | <b>88</b> |           |           |
|  | 0 ... 10   | 30  | 200                         | <b>78</b>         |            |      |      |           |           |           |
|  | <b>Sensor</b>  | Type 02 relative (Accuracy NLH BSL ± 0.25 % FS) |                             |                   |            |      |      |           |           | <b>P2</b> |
|  |  | Type 02 absolute (Accuracy NLH BSL ± 0.25 % FS) |                             |                   |            |      |      |           |           | <b>A2</b> |
| Type 01 relative (Accuracy NLH BSL ± 0.1 % FS) |  |   |                             |                   |            |      |      | <b>P1</b> |           |           |
| Type 01 absolute (Accuracy NLH BSL ± 0.1 % FS) |  |   |                             |                   |            |      |      | <b>A1</b> |           |           |
| <b>Pressure connection</b>                     | 1/4" NPT male  |   |                             |                   |            |      |      |           | <b>30</b> |           |
|  | 1/2" NPT male  |   |                             |                   |            |      |      |           | <b>39</b> |           |
|  | G1/4" female   |   |                             |                   |            |      |      |           | <b>10</b> |           |
|  | G1/4" male   |   |                             |                   |            |      |      |           | <b>15</b> |           |
|  | G1/2" male   |   |                             |                   |            |      |      |           | <b>21</b> |           |
|  | G1/2" male, frontal membrane                             |   |                             |                   |            |      |      |           | <b>31</b> |           |
|  | G1/2" male, flush membrane                               |   |                             |                   |            |      |      |           | <b>32</b> |           |
| <b>Electrical connection</b>                   | Male electrical plug EN 175301-803-A, Mat. plastic       |   |                             |                   |            |      |      |           | <b>05</b> |           |
|  | Male electrical plug Binder 723, 5-pole, Metal           |   |                             |                   |            |      |      |           | <b>14</b> |           |
|  | Male electrical plug MIL-C 26482, 6-pole, Metal          |   |                             |                   |            |      |      |           | <b>02</b> |           |
|  | Female electrical plug M12x1, 5-pole, Metal              |   |                             |                   |            |      |      |           | <b>35</b> |           |
|  | PUR cable, length ... mm (IP67) <sup>5)</sup>            |   |                             |                   |            |      |      |           | <b>22</b> |           |
|  | FEP cable, length ... mm (IP67)                          |   |                             |                   |            |      |      |           | <b>32</b> |           |
| <b>Output</b>                                  | <b>Signal output</b>                                     | <b>Load resistance</b>                          | <b>I (supply)</b>           | <b>U (supply)</b> |            |      |      |           |           |           |
|  | 4 ... 20 mA  | (U <sub>supply</sub> -9 V) / 20 mA              |                             | 9 ... 28 VDC      | <b>19</b>  |      |      |           |           |           |
| <b>Accessories</b>                             | Special oil filling: Aseol                               |   |                             |                   |            |      |      |           | <b>94</b> |           |
|  | Special oil filling: Halocarbon <sup>3) 4)</sup>         |   |                             |                   |            |      |      |           | <b>95</b> |           |
|  | Female electrical connector EN 175301-803-A (DIN43650-A) |   |                             |                   |            |      |      |           | <b>58</b> |           |
|  | Female electrical connector Binder 723, 5-pole, metal    |   |                             |                   |            |      |      |           | <b>37</b> |           |
|  | Female electrical connector MIL-C 26482, 6-pole, metal   |   |                             |                   |            |      |      |           | <b>32</b> |           |
|  | Temperature class T3                                     |   |                             |                   |            |      |      |           | <b>T3</b> |           |
|  | Temperature class T4                                     |   |                             |                   |            |      |      |           | <b>T4</b> |           |
|  | Temperaturklasse T6                                      |   |                             |                   |            |      |      |           | <b>T6</b> |           |
|  | Pressure peak damping element <sup>2)</sup>              |   |                             |                   |            |      |      |           | <b>DE</b> |           |
|  | Zener barrier 28V/93mA; R ≈ 300Ω; Ordering code F90138   |   |                             |                   |            |      |      |           |           |           |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> Only with pressure connection 30, 39, 15, 21

<sup>3)</sup> P2/A2 ≤ 120 bar

<sup>4)</sup> P1/A1 ≤ 270 bar


<sup>5)</sup> ≤ +50°C

| Specifications                  |                                    |   |
|---------------------------------|------------------------------------|---|
| <b>Electrical Data</b>          | Zener barrier                      | 28V/93 mA/0.65 W  |
|                                 | Output / supply voltage            | 4 ... 20 mA; 9 ... 28 VDC   |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure                            |
| <b>Environmental conditions</b> | Media temperature                  | T3: -40°C ... +150°C<br>T4: -40°C ... +100°C<br>T6: -40°C ... +50°C |
|                                 | Ambient temperature                | T3: -40°C ... +125°C<br>T4: -40°C ... +85°C<br>T6: -40°C ... +50°C  |
|                                 | Protection <sup>1)</sup>           | Min. IP65   |
|                                 | Humidity                           | Max. 95 % relative  |
|                                 | Vibration                          | EN 60068-2-6: 10 g (4...2000 Hz)                                    |
|                                 | Shock                              | EN 60068-2-27: 100 g/ 6 ms  |
|                                 | <b>EMC Protection</b>              | Emission  |
|                                 | Immunity                           | IEC 61000-4-2: 8 kV K./15 kV L.                                     |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4435 (AISI316L) or titanium                                       |
|                                 | Pressure connection (wetted parts) | 1.4435 (AISI316L) or titanium                                       |
|                                 | Housing                            | 1.4435 (AISI316L) or titanium                                       |
|                                 | Sealing                            | FKM 70 Sh; EPDM / Kalrez  |
|                                 | Male electrical plug               | See ordering information  |
|                                 | Weight                             | ~ 220 g   |
|                                 | Mounting torque                    | 25 Nm   |


<sup>1)</sup> Provided female connector is mounted according to instructions

| Accuracy                        |             |                                |           |            |             |            |
|---------------------------------|-------------|--------------------------------|-----------|------------|-------------|------------|
|                                 |             | Sensor 01 (P1/A1) NLH ± 0.1 %  |           |            |             |            |
| <b>Pressure measuring range</b> | [bar]       | 0.1 ... 0.5                    | 0.5 ... 2 | 2 ... 100  | 100 ... 600 | > 600      |
| NLH @ +25°C (BSL through 0)     | [% FS typ.] | ± 0.1                          | ± 0.1     | ± 0.1      | ± 0.1       | -          |
| TEB @ 0 ... +70°C               | [% FS typ.] | ± 0.8                          | ± 0.3     | ± 0.3      | ± 0.3       | ± 0.3      |
| TEB @ -25 ... +100°C            | [% FS typ.] | ± 1.3                          | ± 0.75    | ± 0.75     | ± 0.75      | ± 0.75     |
| Long term stability 1 year      |             | < 4 mbar                       | < 4 mbar  | < 0.2 % FS | < 0.2 % FS  | < 0.2 % FS |
| Repeatability                   | [% FS typ.] | ± 0.05                         | ± 0.05    | ± 0.05     | ± 0.05      | ± 0.05     |
|                                 |             | Sensor 02 (P2/A2) NLH ± 0.25 % |           |            |             |            |
| <b>Pressure measuring range</b> | [bar]       | 0.1 ... 0.5                    | 0.5 ... 2 | 2 ... 100  | 100 ... 600 | > 600      |
| NLH @ +25°C (BSL through 0)     | [% FS typ.] | ± 0.25                         | ± 0.25    | ± 0.25     | ± 0.25      | ± 0.25     |
| TEB @ 0 ... +70°C               | [% FS typ.] | ± 1.0                          | ± 0.7     | ± 0.7      | ± 0.7       | ± 0.7      |
| TEB @ -25 ... +100°C            | [% FS typ.] | ± 2.0                          | ± 1.0     | ± 1.0      | ± 1.0       | ± 1.0      |
| Long term stability 1 year      |             | < 4 mbar                       | < 4 mbar  | < 0.2 % FS | < 0.2 % FS  | < 0.2 % FS |
| Repeatability                   | [% FS typ.] | ± 0.05                         | ± 0.05    | ± 0.05     | ± 0.05      | ± 0.05     |


## Dimensions




8854.XX.XX10.XX.XX.XX




8854.XX.XX15.XX.XX.XX




8854.XX.XX21.XX.XX.XX




8854.XX.XX31.XX.XX.XX




8854.XX.XX32.XX.XX.XX

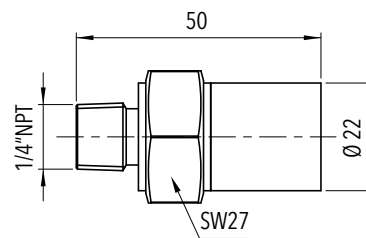

8854.XX.XX30.XX.XX.XX




8854.XX.XX39.XX.XX.XX

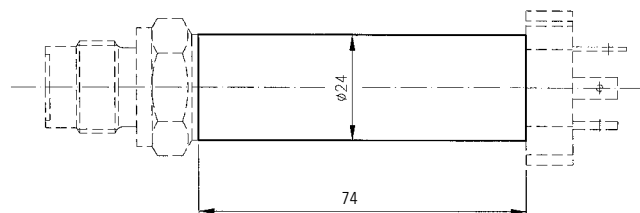


8854.XX.XXXX.XX.XX.T4

8854.XX.XXXX.XX.XX.T6

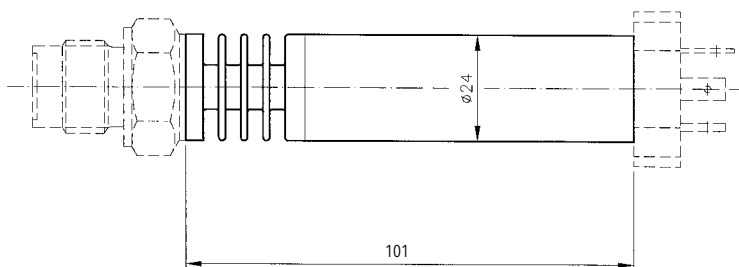


8854.XX.XXXX.XX.XX.T3


## Dimensions

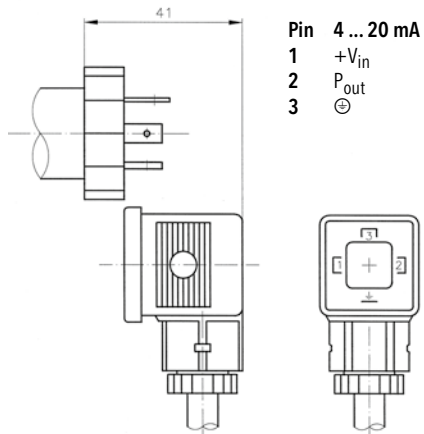

8854.XX.XXXX.05.XX.58

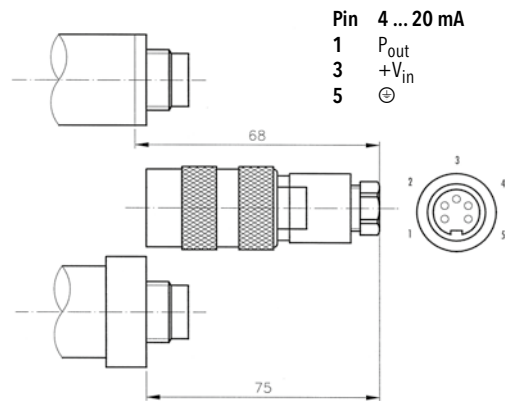


8854.XX.XXXX.14.XX.37




**Color 4 ... 20 mA**  
 white +V<sub>in</sub>  
 yellow P<sub>out</sub>  
 grey ⊖

8854.XX.XXXX.32.XX.XX

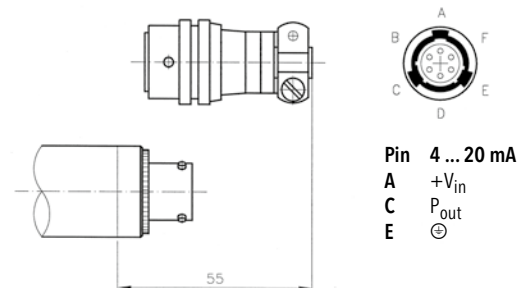

8854.XX.XXXX.02.XX.32

## Electrical Connection



### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72334">www.trafag.com/H72334</a> |
| Instructions | <a href="http://www.trafag.com/">www.trafag.com/</a>             |
| Flyer        | <a href="http://www.trafag.com/H70679">www.trafag.com/H70679</a> |

# EX SUBMERSIBLE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The new EX Submersible Pressure Transmitter EXL is based on the ECL submersible pressure transmitter with Trafag's own thick-film-on-ceramic sensor technology. The intrinsic safety design is certified for applications in Ex-Zones 0, 1, 2 (gas) and mining.



## Applications

- Ex Zone 0, 1, 2 / Gas
- Ex Underground Mining

## Features

- II 1G Ex ia IIC T4/T6 Ga  
I M1 Ex ia I Ma
- Good media compatibility
- Cable PUR/PE or FEP
- EMC protection, IEC 61000

| Technical Data       |                                    |                       |  |
|----------------------|------------------------------------|-----------------------|--|
| Measuring principle  | Thick film on ceramic              | Media temperature     | T4: -20°C ... +70°C<br>T6: -20°C ... +65°C                                 |
| Measuring range      | 0 ... 0.2 to 0 ... 10 bar          | Ambient temperature   | T4: -20°C ... +70°C<br>T6: -20°C ... +65°C                                 |
| Output signal        | 4 ... 20 mA                        | Approval / conformity | GL, KRS<br>Ex ATEX/IECEx, EN 60079-0/<br>EN 60079-11/EN 60079-26/ EN 50303 |
| Accuracy @ 25°C typ. | ± 0.3 % FS typ.<br>± 0.5 % FS typ. |                       |  |

Subject to change

## Ordering information/type code

|                                      |  |                                     |                             | 8432 . XX         | XX | XX | XX | XX | XX |
|--------------------------------------|--|-------------------------------------|-----------------------------|-------------------|----|----|----|----|----|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range [bar]</b>                    | <b>Over pressure [bar]</b>          | <b>Burst pressure [bar]</b> |                   |    |    |    |    |    |
|                                      | 0 ... 0.2  | 1.2                                 | 2                           | 68                |    |    |    |    |    |
|                                      | 0 ... 0.4  | 1.2                                 | 2                           | 69                |    |    |    |    |    |
|                                      | 0 ... 0.6  | 2                                   | 3                           | 70                |    |    |    |    |    |
|                                      | 0 ... 1.0  | 3.2                                 | 4.8                         | 71                |    |    |    |    |    |
|                                      | 0 ... 1.6  | 3.2                                 | 4.8                         | 73                |    |    |    |    |    |
|                                      | 0 ... 2.5  | 5                                   | 7.5                         | 75                |    |    |    |    |    |
|                                      | 0 ... 4  | 8                                   | 12                          | 76                |    |    |    |    |    |
|                                      | 0 ... 6  | 12                                  | 15                          | 77                |    |    |    |    |    |
| 0 ... 10                             | 20   | 25                                  | 78                          |                   |    |    |    |    |    |
| <b>Sensor</b>                        | Relative pressure > 400 mbar, Accuracy: 0.3%               |                                     |                             | 23                |    |    |    |    |    |
|                                      | Relative pressure ≤ 400 mbar, Accuracy: 0.5%               |                                     |                             | 26                |    |    |    |    |    |
| <b>Pressure connection</b>           | Type 1, female, M 10x1, 1.4404/1.4435                      |                                     |                             |                   | 46 |    |    |    |    |
|                                      | Type 2, male, M 22x1, 1.4404/1.4435                        |                                     |                             |                   | 48 |    |    |    |    |
| <b>Electrical connection</b>         | Cable with shield: PUR ø 6 mm, 5x0.22mm <sup>2 2) 3)</sup> |                                     |                             |                   |    |    | 22 |    |    |
|                                      | Cable with shield: FEP ø 6 mm, 5x0.22mm <sup>2 2) 3)</sup> |                                     |                             |                   |    |    | 32 |    |    |
|                                      | Cable with shield: PE ø 6 mm, 6x0.22mm <sup>2 2) 3)</sup>  |                                     |                             |                   |    |    | 42 |    |    |
| <b>Output</b>                        | <b>Signal output</b>                                       | <b>Load resistance</b>              | <b>I (supply)</b>           | <b>U (supply)</b> |    |    |    |    |    |
|                                      | 4 ... 20 mA  | (U <sub>supply</sub> -10 V) / 20 mA |                             | 10 ... 30 VDC     |    |    |    |    | 19 |
| <b>Accessories</b>                   | Seal FKM   |                                     |                             |                   |    |    |    |    | 61 |
|                                      | Seal EPDM  |                                     |                             |                   |    |    |    |    | 63 |
|                                      | Zener barrier 28V/93mA; R ≈ 300Ω: Ordering no ZEN28VDC     |                                     |                             |                   |    |    |    |    |    |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Please specify cable length when ordering (cable lengths >50 m up to 120 m upon request)


<sup>3)</sup> For level measurement applications on ships under certification GL (German Lloyd), the cable of such transmitters must be installed inside the tank only




| Specifications                  |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Electrical Data</b>          | Output / supply voltage            | 4 ... 20 mA; 24 (10 ... 30) VDC                |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure       |
|                                 | Switch-on-delay                    | max. 1.5 s                                     |
| <b>Environmental conditions</b> | Media temperature                  | T4: -20°C ... +70°C<br>T6: -20°C ... +65°C     |
|                                 | Ambient temperature                | T4: -20°C ... +70°C<br>T6: -20°C ... +65°C     |
|                                 | Protection                         | IP68 (25 bar; 250m)                            |
|                                 | Vibration                          | 10 g (50...2000 Hz)                            |
|                                 | Shock                              | 50 g / 3 ms                                    |
| <b>EMC Protection</b>           | Emission                           | IEC 61000-6-4                                  |
|                                 | Immunity                           | IEC 61000-6-2                                  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %) |
|                                 | Pressure connection (wetted parts) | 1.4404/1.4435 (AISI316L)                       |
|                                 | Housing                            | 1.4404/1.4435 (AISI316L)                       |
|                                 | Sealing                            | FKM 70 Sh                                      |
|                                 | Weight                             | ~ 200 g  |

| Accuracy                           |               |   |   |
|------------------------------------|---------------|---|---|
|                                    |               | Measuring accuracy 0.3 %<br>Ordering No. 23 | Measuring accuracy 0.5 %<br>Ordering No. 26 |
| TEB @ -10 ... +70°C                | [% FS typ.]   | ± 0.75                                      | ± 1.5                                       |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.3                                       | ± 0.5                                       |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2                                       | ± 0.3                                       |
| TC zero point and span             | [% FS/K typ.] | ± 0.02                                      | ± 0.02                                      |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.2                                       | ± 0.2                                       |


## Measuring accuracy 0.5%

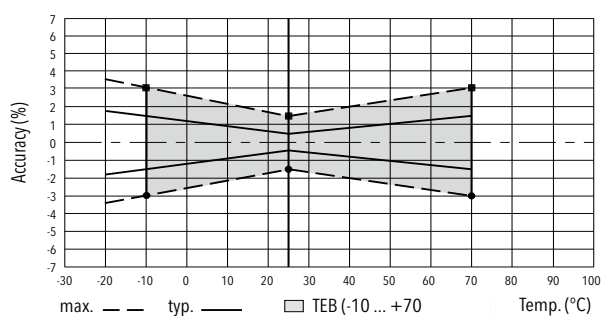


## Measuring accuracy 0.3%

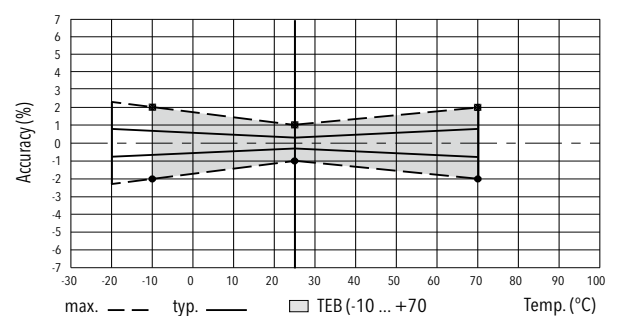


## Dimensions

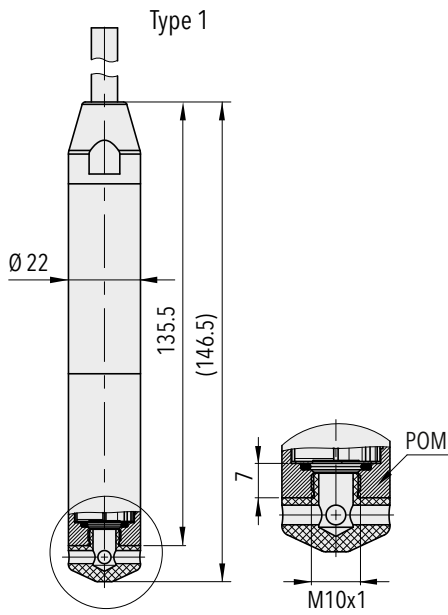


8432.XX.XX46.XX.XX.XX

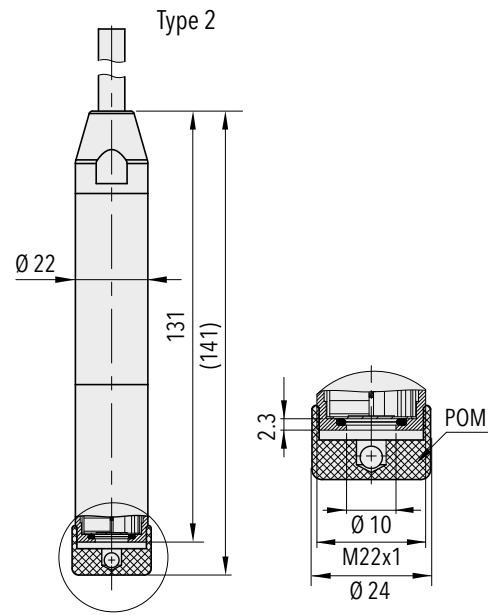

8432.XX.XX48.XX.XX.XX




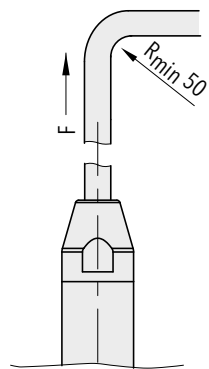


8432.XX.XXXX.22.XX.XX

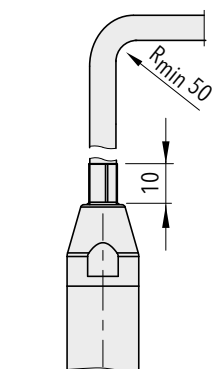

8432.XX.XXXX.32/42.XX.XX


## Electrical connection
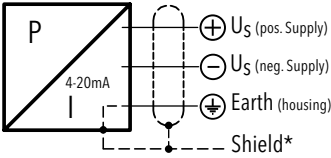
|               |   |                           |  | Protection / electrical connection  |   |   |
|---------------|---|---------------------------|--|---|---|---|
|               |   |                           |  | IP68 (25 bar; 250m)   | IP68 (25 bar; 250m)   | IP68 (25 bar; 250m)   |
|               |   |                           |  | Cable PUR<br>Ø 6 mm (5x0.22mm <sup>2</sup> )<br><b>22</b>                                   | Cable FEP<br>Ø 6 mm (5x0.22mm <sup>2</sup> )<br><b>32</b>   | Cable PE<br>Ø 6 mm (6x0.22mm <sup>2</sup> )<br><b>42</b>                                      |
|               |   |                           |  | Shield<br> | Shield<br>                | Shield<br> |
|               |   |                           |  | Venting   | Venting   | Venting   |
| Output signal |  | <b>8432.xx.xxxx.xx.19</b> | white<br>brown<br>yellow<br><br>(green = not connected)<br>(red = not connected) | white<br>brown<br>yellow<br><br>(green = not connected)<br>(red = not connected)            | white<br>brown<br>yellow<br><br>(green = not connected)<br>(pink = not connected)<br>(grey = not connected) |   |
|               |   |                           | Temperature range  | -20 ... +70°C   | -20 ... +70°C   | -20 ... +70°C   |

Any manipulation on the ventilation tube will result in warranty loss

\*\*\*) For all cable versions

## Ex-Barrier

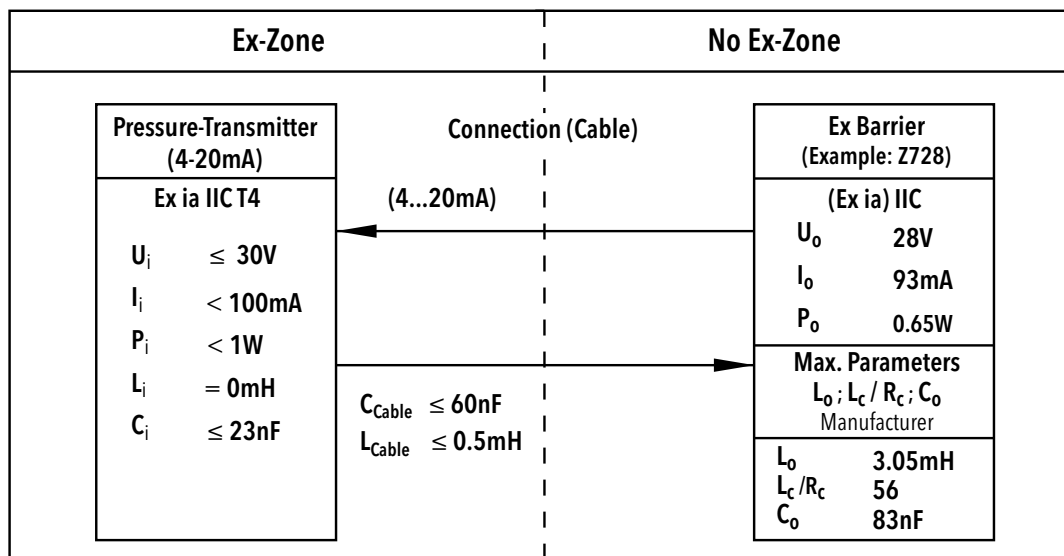

### Additional information

| Documents |              |  |
|-----------|--------------|--|
|           | Data sheet   | <a href="http://www.trafag.com/H72330">www.trafag.com/H72330</a> |
|           | Instructions | <a href="http://www.trafag.com/H73329">www.trafag.com/H73329</a> |
|           | Flyer        | <a href="http://www.trafag.com/H70658">www.trafag.com/H70658</a> |

# EX SUBMERSIBLE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Ex SEV 11 ATEX 0145 X

## Features

- Pressure ranges from 100 mbar
- PUR, PE or Teflon cables
- Chemical resistant material, e.g. titanium
- Explosion-proof Ex ia IIC T3 ... T6
- Option: Lightning protection (IEC 61000-4-5), 10kA (8/20 μs)

| Technical Data      |                           |                       |   |
|---------------------|---------------------------|-----------------------|---|
| Measuring principle | Piezoresistive            | Ambient temperature   | T4/T6: -5°C ... +50°C   |
| Measuring range     | 0 ... 0.1 to 0 ... 25 bar | Approval / conformity | GL, KRS   |
| Output signal       | 4 ... 20 mA               | Type of protection    | <br>II 1G Ex ia IIC T3 ... T6<br>II 1D Ex ia IIIC IP6x T125°C ... T80°C<br>I M1 Ex ia I |
| Media temperature   | T4/T6: -5°C ... +50°C     |                       |   |

Subject to change

## Ordering information/type code

|                               |   |                     |                      | 8858 .     | XX | XX | XX | XX | XX | XX |
|-------------------------------|---|---------------------|----------------------|------------|----|----|----|----|----|----|
| Measuring range <sup>1)</sup> | Pressure measurement range [bar]                                    | Over pressure [bar] | Burst pressure [bar] |            |    |    |    |    |    |    |
|                               |   | 0 ... 0.1           | 3                    | 200        | 66 |    |    |    |    |    |
|                               | 0 ... 0.16  | 3                   | 200                  | 67         |    |    |    |    |    |    |
|                               | 0 ... 0.2   | 3                   | 200                  | 68         |    |    |    |    |    |    |
|                               | 0 ... 0.4   | 3                   | 200                  | 69         |    |    |    |    |    |    |
|                               | 0 ... 0.6   | 3                   | 200                  | 70         |    |    |    |    |    |    |
|                               | 0 ... 1   | 3                   | 200                  | 71         |    |    |    |    |    |    |
|                               | 0 ... 1.6   | 4.8                 | 200                  | 73         |    |    |    |    |    |    |
|                               | 0 ... 2.5   | 7.5                 | 200                  | 75         |    |    |    |    |    |    |
|                               | 0 ... 4   | 12                  | 200                  | 76         |    |    |    |    |    |    |
|                               | 0 ... 6   | 18                  | 200                  | 77         |    |    |    |    |    |    |
|                               | 0 ... 10  | 30                  | 200                  | 78         |    |    |    |    |    |    |
|                               | 0 ... 16  | 48                  | 200                  | 79         |    |    |    |    |    |    |
|                               | 0 ... 25  | 75                  | 200                  | 80         |    |    |    |    |    |    |
| Sensor                        | Type 01, relative pressure (accuracy NLH: ±0.1 % FS) <sup>2)</sup>  |                     |                      |            | P1 |    |    |    |    |    |
|                               | Type 02, relative pressure (accuracy NLH: ±0.25 % FS) <sup>2)</sup> |                     |                      |            | P2 |    |    |    |    |    |
|                               | Type 05, relative pressure (Accuracy NLH: ± 0.5 % FS) <sup>2)</sup> |                     |                      |            | P5 |    |    |    |    |    |
| Pressure connection           | Open  |                     |                      |            |    | 40 |    |    |    |    |
|                               | Closed  |                     |                      |            |    | 41 |    |    |    |    |
|                               | G1/4" male  |                     |                      |            |    | 15 |    |    |    |    |
| Electrical connection         | Cable PUR <sup>3)</sup>   |                     |                      |            |    |    | 22 |    |    |    |
|                               | Cable PE <sup>3)</sup>  |                     |                      |            |    |    | 29 |    |    |    |
|                               | Cable Teflon <sup>3)</sup>  |                     |                      |            |    |    | 32 |    |    |    |
| Output signal                 | Signal output   | Load resistance     | I (supply)           | U (supply) |    |    |    |    |    |    |
|                               | 4 ... 20 mA   |                     |                      |            |    |    |    |    | 19 |    |
|                               | 4 ... 20 mA with lightning protection (Surge)                       |                     |                      |            |    |    |    |    | 09 |    |
| Accessories                   | Special oil filling: Aseol <sup>4)</sup>                            |                     |                      |            |    |    |    |    |    | 94 |
|                               | Special oil filling: Halocarbon <sup>4)</sup>                       |                     |                      |            |    |    |    |    |    | 95 |
|                               | Temperature class T4 <sup>4)</sup>                                  |                     |                      |            |    |    |    |    |    | T4 |
|                               | Temperaturklasse T6 <sup>4)</sup>                                   |                     |                      |            |    |    |    |    |    | T6 |
|                               | Application for seawater <sup>4)</sup>                              |                     |                      |            |    |    |    |    |    | 97 |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> Accuracy NLH see table

<sup>3)</sup> Please specify the cable length when ordering


<sup>4)</sup> Please specify the measuring medium when ordering

| Specifications                  |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Electrical Data</b>          | Repeatability                      | ± 0.05 % FS                                      |
|                                 | Zener barrier                      | 30 VDC/ 100mA/ 1W                                |
|                                 | Load                               | 4 ... 20 mA: $R_L \leq (U_S - 9V)/20 \text{ mA}$ |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure         |
| <b>Environmental conditions</b> | Media temperature                  | T4/T6: -5°C ... +50°C                            |
|                                 | Ambient temperature                | T4/T6: -5°C ... +50°C                            |
|                                 | Protection                         | Min. IP68  |
|                                 | Humidity                           | Max. 95 % relative                               |
|                                 | Vibration                          | 6 g (25...2000 Hz)                               |
|                                 | Shock                              | 50 g / 1 ms                                      |
| <b>EMC Protection</b>           | Burst                              | EN/IEC 61000-4-4, Level 3                        |
|                                 | Surge                              | EN/IEC 61000-4-5, Level 3<br>$R_i = 42\Omega$    |
|                                 | Emission                           | EN/IEC 61000-6-3                                 |
|                                 | Immunity                           | EN/IEC 61000-6-2                                 |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4435 (AISI316L)                                |
|                                 | Pressure connection (wetted parts) | 1.4435 (AISI316L) or titanium                    |
|                                 | Housing                            | 1.4435 (AISI316L) or titanium                    |
|                                 | Sealing                            | FKM  |
|                                 | Male electrical plug               | See ordering information                         |
|                                 | Weight                             | ~ 200 g  |
|                                 | Mounting torque                    | 25 Nm  |


| Accuracy   |            |             |           |            |
|--|------------|-------------|-----------|------------|
| Range  | [bar]      | 0.1 ... 0.5 | 0.5 ... 2 | 2 ... 25   |
| Accuracy NLH (BSL through 0) <b>P5</b>             | [± % FS]   | ± 0.5       | ± 0.5     | ± 0.5      |
| Accuracy NLH (BSL through 0) <b>P2</b>             | [± % FS]   | ± 0.25      | ± 0.25    | ± 0.25     |
| Accuracy NLH (BSL through 0) <b>P1</b>             | [± % FS]   | -           | ± 0.1     | ± 0.1      |
| Temperature coefficient Zero point<br>-5 ... +50°C | [± % FS/K] | ± 0.06      | ± 0.03    | ± 0.015    |
| Temperature coefficient Span<br>-5 ... +50°C       | [± % FS/K] | ± 0.015     | ± 0.015   | ± 0.015    |
| Long term drift                                    | [1 year]   | < 4 mbar    | < 4 mbar  | < 0.2 % FS |

| Additional information |              |  |
|------------------------|--------------|--|
| <b>Documents</b>       | Data sheet   | <a href="http://www.trafag.com/H72231">www.trafag.com/H72231</a> |
|                        | Instructions | <a href="http://www.trafag.com/">www.trafag.com/</a>             |
|                        | Flyer        | <a href="http://www.trafag.com/">www.trafag.com/</a>             |


## Dimensions

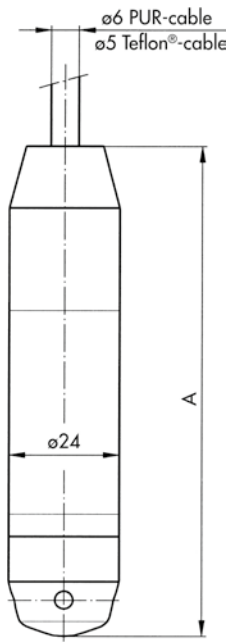

8858.XX.XX.41.XX.XX.XX

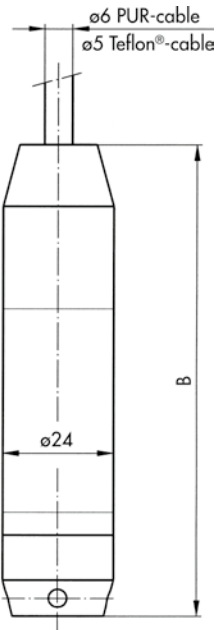


8858.XX.XX.40.XX.XX.XX




8858.XX.XX.15.XX.XX.XX

|                           | A [mm] | B [mm] |
|---------------------------|--------|--------|
| Standard                  | 113    | 109    |
| With lightning protection | 157    | 153    |

## Electrical connection



Color 4 ... 20 mA  
 white +V<sub>in</sub>  
 yellow P<sub>out</sub>  
 brown ⊕

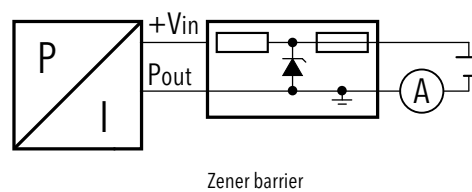

Zener barrier

# SUBMERSIBLE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The new Submersible Pressure Transmitter ECL is based on Trafag's own thick-film-on-ceramic technology. Together with the inhouse developed high performance ASIC chip electronics it ensures a high level of accuracy over a wide temperature range.



## Applications

- Process technology
- Water treatment



## Features

- Good media compatibility
- Economical
- Cable PUR/PE or FEP
- Lightning protection integrated

### Technical Data

|                      |   |                       |                         |
|----------------------|---|-----------------------|-------------------------|
| Measuring principle  | Thick film on ceramic   | Media temperature     | -25°C ... +80°C (+70°C) |
| Measuring range      | 0 ... 0.1 to 0 ... 10 bar   | Ambient temperature   | -25°C ... +80°C (+70°C) |
| Output signal        | 4 ... 20 mA   | Approval / conformity | GL, KRS                 |
| Accuracy @ 25°C typ. | ± 0.3 % FS typ.<br>Range 0...0.1 to 0...0.4 bar:<br>± 0.5 % FS typ. |                       |                         |

Subject to change



## Ordering information/type code

|                                      |  |                                  |                             | 8438              | XX | XX | XX | XX | XX | XX |
|--------------------------------------|--|----------------------------------|-----------------------------|-------------------|----|----|----|----|----|----|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range [bar]</b>      | <b>Over pressure [bar]</b>       | <b>Burst pressure [bar]</b> |                   |    |    |    |    |    |    |
|                                      | 0 ... 0.1                                    | 1.2                              | 2                           | 66                |    |    |    |    |    |    |
|                                      | 0 ... 0.16                                   | 1.2                              | 2                           | 67                |    |    |    |    |    |    |
|                                      | 0 ... 0.2                                    | 1.2                              | 2                           | 68                |    |    |    |    |    |    |
|                                      | 0 ... 0.4                                    | 1.2                              | 2                           | 69                |    |    |    |    |    |    |
|                                      | 0 ... 0.6                                    | 1.2                              | 2                           | 70                |    |    |    |    |    |    |
|                                      | 0 ... 1.0                                    | 2                                | 3                           | 71                |    |    |    |    |    |    |
|                                      | 0 ... 1.6                                    | 3.2                              | 4.8                         | 73                |    |    |    |    |    |    |
|                                      | 0 ... 2.5                                    | 5                                | 7.5                         | 75                |    |    |    |    |    |    |
|                                      | 0 ... 4                                      | 8                                | 12                          | 76                |    |    |    |    |    |    |
|                                      | 0 ... 6                                      | 12                               | 15                          | 77                |    |    |    |    |    |    |
| 0 ... 10                             | 20   | 25                               | 78                          |                   |    |    |    |    |    |    |
| <b>Sensor</b>                        | Relative pressure > 400 mbar, accuracy 0.3%  |                                  |                             |                   |    |    |    |    |    | 23 |
|                                      | Relative pressure ≤ 400 mbar, accuracy: 0.5% |                                  |                             |                   |    |    |    |    |    | 26 |
| <b>Pressure connection</b>           | Type 1, female, M 10x1, 1.4404/1.4435        |                                  |                             |                   |    |    |    |    |    | 46 |
|                                      | Type 2, male, M 22x1, 1.4404/1.4435          |                                  |                             |                   |    |    |    |    |    | 48 |
| <b>Electrical connection</b>         | Cable: PUR ø 6 mm <sup>2) 3)</sup>           |                                  |                             |                   |    |    |    |    |    | 22 |
|                                      | Cable: FEP ø 6 mm <sup>2) 3)</sup>           |                                  |                             |                   |    |    |    |    |    | 32 |
|                                      | Cable: PE ø 6 mm <sup>2) 3)</sup>            |                                  |                             |                   |    |    |    |    |    | 42 |
| <b>Output</b>                        | <b>Signal output</b>                         | <b>Load resistance</b>           | <b>I (supply)</b>           | <b>U (supply)</b> |    |    |    |    |    |    |
|                                      | 4 ... 20mA                                   | (U <sub>supply</sub> -9V) / 20mA |                             | 9 ... 30 VDC      |    |    |    |    |    | 19 |
| <b>Accessories</b>                   | Seal FKM                                     |                                  |                             |                   |    |    |    |    |    | 61 |
|                                      | Seal CR                                      |                                  |                             |                   |    |    |    |    |    | 62 |
|                                      | Seal EPDM                                    |                                  |                             |                   |    |    |    |    |    | 63 |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Please specify cable length when ordering (cable lengths >50 m up to 120 m upon request)

<sup>3)</sup> For level measurement applications on ships under certification GL (German Lloyd), the cable of such transmitters must be installed inside the tank only

## Standard products (extra short lead time)

| Product No. | Type Code                             | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Cable length |
|-------------|---------------------------------------|----------------------|--------------------------|--------------|--------------|
| ECL0.2A     | 8438 68 2646 22 0000 0000 19 61 5M    | 0...0.2              | 2                        | 9...30       | 5m           |
| ECL0.5A     | 8438 21 2346 22 0000 0000 19 61 8M 01 | 0...0.5              | 2                        | 9...30       | 10m          |


## Specifications

|                                 |                                    |  |
|---------------------------------|------------------------------------|--|
| <b>Electrical Data</b>          | Output / supply voltage            | 4 ... 20 mA; 24 (9 ... 32) VDC                 |
|                                 | Rise time                          | Typ. 1 ms/10...90 % nominal pressure           |
|                                 | Switch-on-delay                    | Max. 1.5 s                                     |
| <b>Environmental conditions</b> | Media temperature                  | -25°C ... +80°C (+70°C)                        |
|                                 | Ambient temperature                | -25°C ... +80°C (+70°C)                        |
|                                 | Protection                         | IP68 (25 bar; 250m)                            |
|                                 | Vibration                          | 6g (25...2000 Hz)                              |
|                                 | Shock                              | 50g/ 8 ms                                      |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-3                               |
|                                 | Immunity                           | EN/IEC 61000-6-2                               |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %) |
|                                 | Pressure connection (wetted parts) | 1.4404/1.4435 (AISI316L)                       |
|                                 | Housing                            | 1.4404/1.4435 (AISI316L)                       |
|                                 | Sealing                            | FKM 70 Sh<br>CR, EPDM                          |
|                                 | Weight                             | ~ 200 g  |


## Accuracy

|                                    |               | Measuring accuracy 0.3%<br>Ordering No. 23 | Measuring accuracy 0.5%<br>Ordering No. 26 |
|------------------------------------|---------------|--|--|
| TEB @ -10...+80°C                  | [% FS typ.]   | ± 1.0                                      | ± 2.0                                      |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.3                                      | ± 0.5                                      |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2                                      | ± 0.3                                      |
| TC zero point and span             | [% FS/K typ.] | ± 0.02                                     | ± 0.02                                     |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.2                                      | ± 0.2                                      |


### Measuring accuracy 0.5%

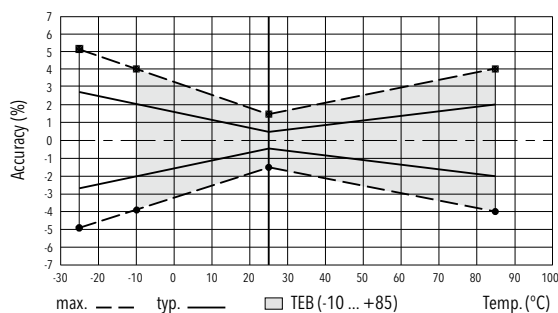


### Measuring accuracy 0.3%

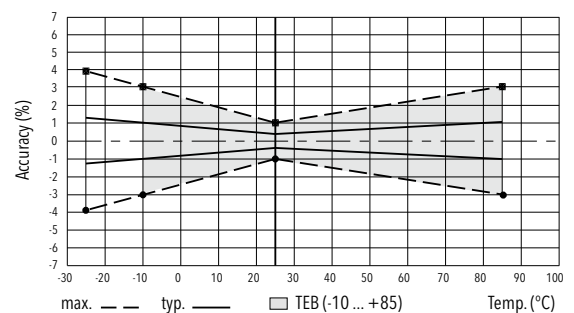


## Dimensions

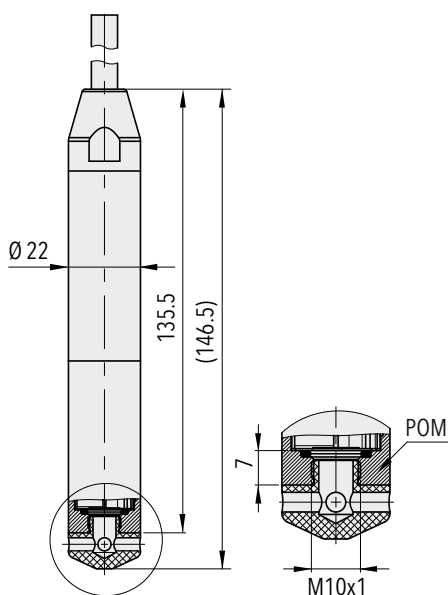

8438.XX.XX46.XX.XX.XX

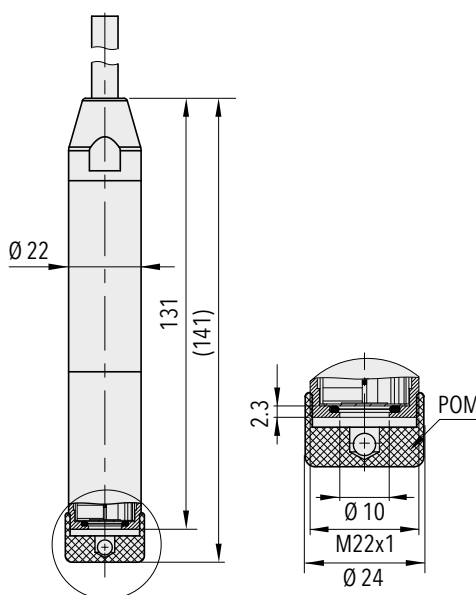

8438.XX.XX48.XX.XX.XX

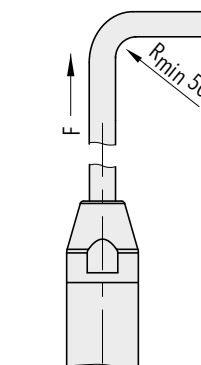

F = max. 12 kg (120 N)

## Electrical Connection

|                   |  |                           |  | Protection / electrical connection                        |   |  |
|-------------------|--|---------------------------|--|---|---|--|
|                   |  |                           |  | IP68 (25 bar; 250m)                                       | IP68 (25 bar; 250m)                                       | IP68 (25 bar; 250m)                                      |
|                   |  |                           |  | Cable PUR<br>Ø 6 mm (5x0.22mm <sup>2</sup> )<br><b>22</b> | Cable FEP<br>Ø 6 mm (5x0.22mm <sup>2</sup> )<br><b>32</b> | Cable PE<br>Ø 6 mm (5x0.22mm <sup>2</sup> )<br><b>42</b> |
|                   |  |                           |  | Shield  | Shield  | Shield   |
|                   |  |                           |  |   |   |  |
| Output signal     |  | <b>8438.XX.XXXX.XX.19</b> | white  | white   | white   |  |
|                   |  |                           | brown  | brown   | brown   |  |
|                   |  |                           | yellow   | yellow  | yellow  |  |
|                   |  |                           | (green = not connected)<br>(red = not connected) | (green = not connected)<br>(red = not connected)          | (green = not connected)<br>(red = not connected)          |  |
| Temperature range |  |                           |  | -25 ... +70°C   | -25 ... +80°C   | -25 ... +70°C  |

Any manipulation on the ventilation tube will result in warranty loss

\*\*\*) For all cable versions

### Additional information

| Documents |              |  |
|-----------|--------------|--|
|           | Data sheet   | <a href="http://www.trafag.com/H72328">www.trafag.com/H72328</a> |
|           | Instructions | <a href="http://www.trafag.com/H73328">www.trafag.com/H73328</a> |
|           | Flyer        | <a href="http://www.trafag.com/H70641">www.trafag.com/H70641</a> |

# SUBMERSIBLE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The new Submersible Pressure Transmitter ECL is based on Trafag's own thick-film-on-ceramic technology. The optionally configurable pressure ranges can be adapted individually via interface tool and Smartphone App.



OEM-version

## Applications

- Process technology
- Water treatment (wastewater, grey-water, drinking water)
- Seawater
- Level of oils and fuels

## Features

- Suitable for thick and viscous media
- Different materials for optimum media compatibility
- Lightning protection integrated
- Configurable measuring ranges

### Technical Data

|                     |   |                      |   |
|---------------------|---|----------------------|---|
| Measuring principle | Thick film on ceramic                                   | Accuracy @ 25°C typ. | ± 0.3 % FS typ.<br>Range 0 ... 0.1 to 0 ... 0.2 bar:<br>± 0.5 % FS typ. |
| Measuring range     | 0 ... 0.1 to 0 ... 2.0 bar<br>0 ... 1.5 to 0 ... 30 psi | Media temperature    | max. -25°C ... +70°C  |
| Output signal       | 4 ... 20 mA   | Ambient temperature  | max. -25°C ... +70°C  |

Subject to change

## Ordering information/type code

|  |   |                            |                             |           |   |                            | 8439 . XX                   | XX        | XX        | XX        | XX | XX |  |
|--|---|----------------------------|-----------------------------|-----------|---|----------------------------|-----------------------------|-----------|-----------|-----------|----|----|--|
| <b>Measuring range</b> <sup>1)</sup>                               | <b>Pressure measurement range [bar]</b>             | <b>Over pressure [bar]</b> | <b>Burst pressure [bar]</b> |           | <b>Pressure measurement range [psi]</b>         | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |           |           |           |    |    |  |
|  | 0 ... 0.1   | 1.2                        | 2                           | <b>66</b> | 0 ... 1.5                                       | 15                         | 30                          | <b>F6</b> |           |           |    |    |  |
|  | 0 ... 0.16  | 1.2                        | 2                           | <b>67</b> | 0 ... 2   | 15                         | 30                          | <b>F7</b> |           |           |    |    |  |
|  | 0 ... 0.2   | 1.2                        | 2                           | <b>68</b> | 0 ... 2.5                                       | 15                         | 30                          | <b>F8</b> |           |           |    |    |  |
|  | 0 ... 0.4   | 1.2                        | 2                           | <b>69</b> | 0 ... 5   | 15                         | 30                          | <b>F9</b> |           |           |    |    |  |
|  | 0 ... 0.5   | 1.2                        | 2                           | <b>64</b> | 0 ... 6.5                                       | 15                         | 30                          | <b>F4</b> |           |           |    |    |  |
|  | 0 ... 0.6   | 1.2                        | 2                           | <b>70</b> | 0 ... 7.5                                       | 15                         | 30                          | <b>G0</b> |           |           |    |    |  |
|  | 0 ... 1.0   | 2                          | 3                           | <b>71</b> | 0 ... 15  | 30                         | 45                          | <b>G1</b> |           |           |    |    |  |
|  | 0 ... 1.6   | 3.2                        | 4.8                         | <b>73</b> | 0 ... 20  | 45                         | 70                          | <b>G3</b> |           |           |    |    |  |
|  | 0 ... 2.0   | 3.2                        | 4.8                         | <b>72</b> | 0 ... 30  | 45                         | 70                          | <b>G2</b> |           |           |    |    |  |
| <b>Configurable measuring ranges Standard, see table on page 3</b> |   |                            |                             |           |   |                            |                             |           |           |           |    |    |  |
| <b>Sensor</b>  | Relative pressure                                   |                            |                             |           |   |                            |                             |           | <b>23</b> |           |    |    |  |
| <b>Housing</b>   | Housing AISI316L, standard version <sup>2)</sup>    |                            |                             |           |   |                            |                             |           | <b>58</b> |           |    |    |  |
|  | Housing 1.4462, standard version <sup>2) 3)</sup>   |                            |                             |           |   |                            |                             |           | <b>55</b> |           |    |    |  |
|  | Housing AISI316L, OEM-version <sup>2)</sup>         |                            |                             |           |   |                            |                             |           | <b>56</b> |           |    |    |  |
|  | Housing 1.4462, OEM-version <sup>2) 3)</sup>        |                            |                             |           |   |                            |                             |           | <b>50</b> |           |    |    |  |
|  | Housing AISI316L, Serto Connection <sup>2) 3)</sup> |                            |                             |           |   |                            |                             |           | <b>60</b> |           |    |    |  |
| <b>Electrical connection</b>                                       | Cable PUR, Ø 6 mm, L = 5 m                          |                            |                             | <b>21</b> | Cable Radox, Ø 6 mm, L = 25 m                   |                            |                             | <b>35</b> |           |           |    |    |  |
|  | Cable PUR, Ø 6 mm, L = 10 m                         |                            |                             | <b>22</b> | Cable Radox, Ø 6 mm, L = 30 m                   |                            |                             | <b>36</b> |           |           |    |    |  |
|  | Cable PUR, Ø 6 mm, L = 15 m                         |                            |                             | <b>23</b> | Cable Radox, Ø 6 mm, customized (L = max. 50 m) |                            |                             | <b>30</b> |           |           |    |    |  |
|  | Cable PUR, Ø 6 mm, L = 20 m                         |                            |                             | <b>24</b> | Cable PE, Ø 6 mm, L = 5 m                       |                            |                             | <b>41</b> |           |           |    |    |  |
|  | Cable PUR, Ø 6 mm, L = 25 m                         |                            |                             | <b>25</b> | Cable PE, Ø 6 mm, L = 10 m                      |                            |                             | <b>42</b> |           |           |    |    |  |
|  | Cable PUR, Ø 6 mm, L = 30 m                         |                            |                             | <b>26</b> | Cable PE, Ø 6 mm, L = 15 m                      |                            |                             | <b>43</b> |           |           |    |    |  |
|  | Cable PUR, Ø 6 mm, customized (L = max. 50 m)       |                            |                             | <b>20</b> | Cable PE, Ø 6 mm, L = 20 m                      |                            |                             | <b>44</b> |           |           |    |    |  |
|  | Cable Radox, Ø 6 mm, L = 5 m                        |                            |                             | <b>31</b> | Cable PE, Ø 6 mm, L = 25 m                      |                            |                             | <b>45</b> |           |           |    |    |  |
|  | Cable Radox, Ø 6 mm, L = 10 m                       |                            |                             | <b>32</b> | Cable PE, Ø 6 mm, L = 30 m                      |                            |                             | <b>46</b> |           |           |    |    |  |
|  | Cable Radox, Ø 6 mm, L = 15 m                       |                            |                             | <b>33</b> | Cable PE, Ø 6 mm, customized (L = max. 50 m)    |                            |                             | <b>40</b> |           |           |    |    |  |
|  | Cable Radox, Ø 6 mm, L = 20 m                       |                            |                             | <b>34</b> |   |                            |                             |           |           |           |    |    |  |
|  | <b>Output signal</b>                                | 4 ... 20 mA                |                             |           |   |                            |                             |           |           | <b>19</b> |    |    |  |
|  | <b>Accessories</b>                                  | Seal FKM / FPM / Viton     |                             |           |   |                            |                             |           |           | <b>61</b> |    |    |  |
| Seal EPDM / TPE  |   |                            |                             |           |   |                            |                             | <b>63</b> |           |           |    |    |  |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> See "Dimensions"

<sup>3)</sup> Upon request

## Configurable measuring ranges standard

| Pressure measuring range minimal | Pressure measuring range max. (nominal range) | Overpressure | Burst pressure | Ordering no. |
|----------------------------------|---|--------------|----------------|--------------|
| 0 ... 0.1                        | 0 ... 0.3                                     | 1.2          | 2              | C1           |
| 0 ... 0.15                       | 0 ... 0.4                                     | 1.2          | 2              | C2           |
| 0 ... 0.2                        | 0 ... 0.6                                     | 1.2          | 2              | C3           |
| 0 ... 0.35                       | 0 ... 1.0                                     | 2            | 3              | C4           |
| 0 ... 0.6                        | 0 ... 1.6                                     | 3.2          | 4.8            | C5           |
| 0 ... 0.85                       | 0 ... 2.0                                     | 3.2          | 4.8            | C6           |

All accuracy indications refer to the nominal measurement range and the respective span. When minimizing the span, the relative errors are increasing in relation of the maximum to the selected span.

### **i** Configuration of the measuring ranges

All measurement ranges can be configured via Smartphone app (Android). The SMI Sensor Master Interface as well as the Smartphone, which are necessary for the configuration, are not part of the delivery. The Android app is available for free in the Google Play Store.



- Ordering No. SMI Sensor Master Interface: F90170 (available from the 2nd quarter of 2018)
- Data sheet SMI Sensor Master Interface: H72618

| Type   | Type code  | Housing  | Cable material | Seal        | Typical applications                   |
|--|--|----------|----------------|-------------|--|
| Standard <sup>1)</sup><br>OEM <sup>1)</sup><br>Serto | 8439.XX.2358.2X.19.61.XX<br>8439.XX.2356.2X.19.61.XX<br>8439.XX.2360.2X.19.61.XX | AISI316L | PUR            | FKM / Viton | General applications                   |
| Standard<br>OEM<br>Serto                             | 8439.XX.2358.3X.19.61.XX<br>8439.XX.2356.3X.19.61.XX<br>8439.XX.2360.3X.19.61.XX | AISI316L | Radox          | FKM / Viton | Oils and fuels                         |
| Standard<br>OEM<br>Serto                             | 8439.XX.2358.4X.19.63.XX<br>8439.XX.2356.4X.19.63.XX<br>8439.XX.2360.4X.19.63.XX | AISI316L | PE             | EPDM / TPE  | Wastewater, grey-water, drinking water |
| Standard<br>OEM                                      | 8439.XX.2355.4X.19.63.XX<br>8439.XX.2350.4X.19.63.XX                             | 1.4462   | PE             | EPDM / TPE  | Seawater, Saline water                 |
| Standard<br>OEM                                      | 8439.XX.23.55.3X.19.63.XX<br>8439.XX.23.50.3X.19.63.XX                           | 1.4462   | Radox          | EPDM / TPE  | Marine applications <sup>2)</sup>      |

Non-standard build-up combinations may be selected, whereas minimum order quantities may apply

<sup>1)</sup> Extra short lead time

<sup>2)</sup> Cable PUR or PE only usable inside tank

| Specifications                  |                                    |   |
|---------------------------------|------------------------------------|---|
| <b>Electrical Data</b>          | Output / supply voltage            | 4...20 mA: 24 (9...32) VDC                        |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure          |
|                                 | Switch-on-delay                    | 100 ms  |
| <b>Environmental conditions</b> | Media temperature <sup>1)</sup>    | max. -25°C ... +70°C                              |
|                                 | Ambient temperature                | max. -25°C ... +70°C                              |
|                                 | Protection                         | IP68 (2.0 bar/20 m)                               |
|                                 | Vibration                          | 20 g (40 ... 2000 Hz)<br>15 grms (20 ... 2000 Hz) |
|                                 | Shock                              | 50 g / 8 ms                                       |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-3 / DNVGL-CG-0339                  |
|                                 | Immunity                           | EN/IEC 61000-6-2 / DNVGL-CG-0339                  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96%)     |
|                                 | Pressure connection (wetted parts) | 1.4404 (AISI316L) or 1.4462 (AISI318LN)           |
|                                 | Housing                            | 1.4404 (AISI316L) or 1.4462 (AISI318LN)           |
|                                 | Sealing                            | FKM (FPM, Viton), EPDM (TPE)                      |
|                                 | Weight                             | ~ 200 g (without cable) / OEM ~ 150 g             |


<sup>1)</sup> see table Temperature ranges

| Temperature ranges                 |  |                 |
|------------------------------------|--|-----------------|
| Max. ambient and media temperature |  | -25°C ... +70°C |
| Cable PE                           | Code 8439.XX.23.XX.4X.19.XX                                | -20°C ... +65°C |
| Seal FKM with standard version     | Code 8439.XX.23.55.XX.19.61<br>Code 8439.XX.23.58.XX.19.61 | -20°C ... +70°C |
| Seal FKM with Serto connection     | Code 8439.XX.23.60.XX.19.61                                |                 |


| Accuracy                           |               |  |  |
|------------------------------------|---------------|--|--|
|                                    |               | Measuring accuracy 0.3 %<br>Measuring ranges ≥ 0.3 bar | Measuring accuracy 0.5 %<br>Measuring ranges < 0.3 bar |
| TEB @ -25 ... +70°C                | [% FS typ.]   | ± 1.0  | ± 2.0  |
| Accuracy @ +25°C                   | [% FS typ.]   | ± 0.3  | ± 0.5  |
| NLH @ +25°C (BSL)                  | [% FS typ.]   | ± 0.2  | ± 0.3  |
| TC zero point and span             | [% FS/K typ.] | ± 0.02   | ± 0.02   |
| Long term stability 1 year @ +25°C | [% FS typ.]   | ± 0.2  | ± 0.2  |

The indications of instruments with configurable measuring ranges refer always to the span of the maximum measuring range. When minimizing the span, the relative errors are increasing in relation of the maximum to the selected span.


## Measuring accuracy 0.5 %

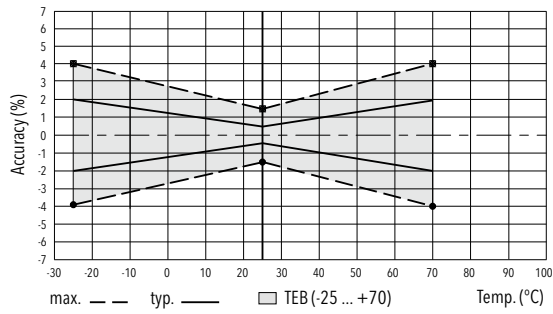

## Measuring accuracy 0.3 %

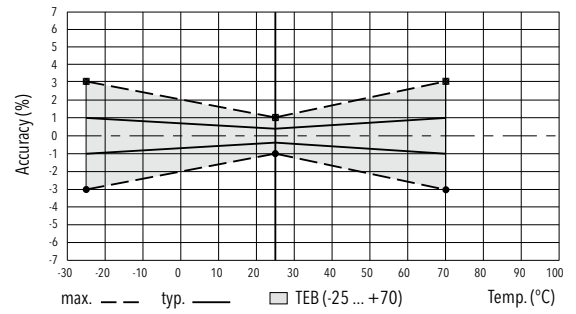


## Dimensions

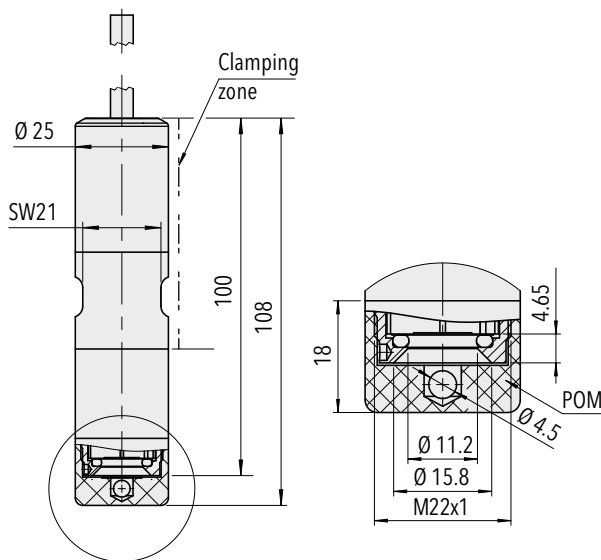


**8439.XX.XX58/55.XX.XX.XX**

Standard version

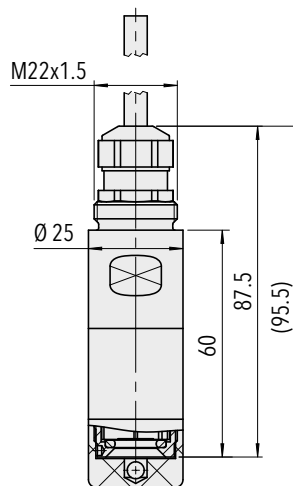


**8439.XX.XX56/50.XX.XX.XX**

OEM-version

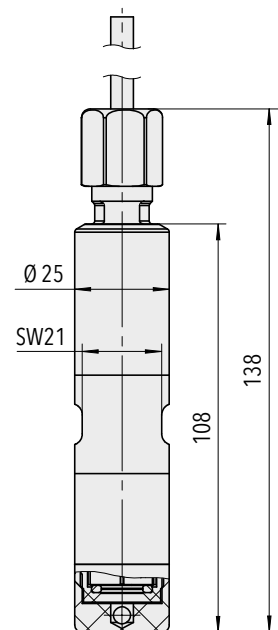

**8439.XX.XX60.XX.XX.XX**





Serto adapter SO 50021-12  
for stainless steel tubes with:  
outer diameter 12 mm  
inner diameter 8 mm

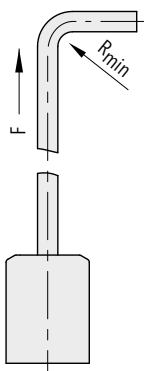

F = max. 12 kg (120 N)



## Electrical connection
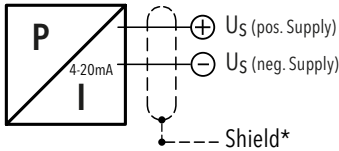
|               |   | Protection / electrical connection  |  |   |
|---------------|---|---|--|---|
|               |   | IP68 (2.0 bar/20 m)   | IP68 (2.0 bar/20 m)  | IP68 (2.0 bar/20 m)   |
|               |   | Cable PUR<br>Ø 6 mm (5x0.22mm <sup>2</sup> )                                      | Cable Radox<br>Ø 6 mm (5x0.22mm <sup>2</sup> )                                     | Cable PE<br>Ø 6 mm (5x0.22mm <sup>2</sup> )   |
|               |   | <b>2X</b>   | <b>3X</b>  | <b>4X</b>   |
|               |   |  |  |  |
| Output signal |  | white<br>brown  | white<br>brown   | white<br>brown  |
|               | <b>8439.XX.XXXX.XX.19</b>   | (yellow = not connected)<br>(green = not connected)<br>(red = not connected)      | (yellow = not connected)<br>(green = not connected)<br>(red = not connected)       | (yellow = not connected)<br>(green = not connected)<br>(red = not connected)        |
|               | Minimum cable bending radius R <sub>min</sub>                                     | 40 mm   | 60 mm  | 30 mm   |
| T-Range       | Ambient and media temperature   | -25°C ... +70°C   | -25°C ... +70°C  | -20°C ... +65°C   |

\* Shield not connected

### Additional information

|                  |              |  |
|------------------|--------------|--|
| <b>Documents</b> | Data sheet   | <a href="http://www.trafag.com/H72336">www.trafag.com/H72336</a> |
|                  | Instructions | <a href="http://www.trafag.com/H73336">www.trafag.com/H73336</a> |
|                  | Flyer        | <a href="http://www.trafag.com/H70690">www.trafag.com/H70690</a> |

# SUBMERSIBLE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Process technology
- Water treatment

## Features

- Low pressure ranges (to 100 mbar)
- No media contacting O-rings
- PUR or Teflon cables
- Option: Chemical resistant material, e.g. titanium
- Option: Lightning protection (IEC 61000-4-5)

### Technical Data

|                     |                             |                       |                |
|---------------------|-----------------------------|-----------------------|----------------|
| Measuring principle | Piezoresistive              | Media temperature     | -5°C ... +50°C |
| Measuring range     | 0 ... 0.1 to 0 ... 25 bar   | Ambient temperature   | -5°C ... +50°C |
| Output signal       | 4 ... 20 mA<br>0 ... 10 VDC | Approval / conformity | GL, KRS        |

Subject to change

## Ordering information/type code

|                               |  |                     |                      | 8838 . | XX | XX | XX | XX | XX | XX |
|-------------------------------|--|---------------------|----------------------|--------|----|----|----|----|----|----|
| Measuring range <sup>1)</sup> | Pressure measurement range [bar]                     | Over pressure [bar] | Burst pressure [bar] |        |    |    |    |    |    |    |
|                               | 0 ... 0.1  | 3                   | 200                  | 66     |    |    |    |    |    |    |
|                               | 0 ... 0.16   | 3                   | 200                  | 67     |    |    |    |    |    |    |
|                               | 0 ... 0.2  | 3                   | 200                  | 68     |    |    |    |    |    |    |
|                               | 0 ... 0.4  | 3                   | 200                  | 69     |    |    |    |    |    |    |
|                               | 0 ... 0.6  | 3                   | 200                  | 70     |    |    |    |    |    |    |
|                               | 0 ... 1.0  | 3                   | 200                  | 71     |    |    |    |    |    |    |
|                               | 0 ... 1.6  | 4.8                 | 200                  | 73     |    |    |    |    |    |    |
|                               | 0 ... 2.5  | 7.5                 | 200                  | 75     |    |    |    |    |    |    |
|                               | 0 ... 4  | 12                  | 200                  | 76     |    |    |    |    |    |    |
|                               | 0 ... 6  | 18                  | 200                  | 77     |    |    |    |    |    |    |
|                               | 0 ... 10   | 30                  | 200                  | 78     |    |    |    |    |    |    |
|                               | 0 ... 16   | 48                  | 200                  | 79     |    |    |    |    |    |    |
|                               | 0 ... 25   | 75                  | 200                  | 80     |    |    |    |    |    |    |
| <b>Sensor</b>                 | Type 05, accuracy NLH: $\pm 0.5\%$ FS <sup>2)</sup>  |                     |                      |        | P5 |    |    |    |    |    |
|                               | Type 02, accuracy NLH: $\pm 0.25\%$ FS <sup>2)</sup> |                     |                      |        | P2 |    |    |    |    |    |
|                               | Type 01, accuracy NLH: $\pm 0.1\%$ FS <sup>2)</sup>  |                     |                      |        | P1 |    |    |    |    |    |
| <b>Pressure connection</b>    | Open   |                     |                      |        |    | 40 |    |    |    |    |
|                               | Closed   |                     |                      |        |    | 41 |    |    |    |    |
|                               | G1/4" male   |                     |                      |        |    | 15 |    |    |    |    |
| <b>Electrical Connection</b>  | Cable PUR <sup>3)</sup>                              |                     |                      |        |    |    | 22 |    |    |    |
|                               | Cable Teflon <sup>3)</sup>                           |                     |                      |        |    |    | 32 |    |    |    |
|                               | Cable PE <sup>3)</sup>                               |                     |                      |        |    |    | 29 |    |    |    |
| <b>Output</b>                 | 4 ... 20 mA  |                     |                      |        |    |    |    | 19 |    |    |
|                               | 4 ... 20 mA with lightning protection (Surge)        |                     |                      |        |    |    |    | 09 |    |    |
|                               | 0 ... 10 VDC   |                     |                      |        |    |    |    | 17 |    |    |
| <b>Accessories</b>            | Detachable cable <sup>4)</sup>                       |                     |                      |        |    |    |    |    |    | 37 |
|                               | Special oil filling Aseol <sup>4)</sup>              |                     |                      |        |    |    |    |    |    | 94 |
|                               | Special oil filling Halocarbon <sup>4)</sup>         |                     |                      |        |    |    |    |    |    | 95 |
|                               | Electronics packed in gel <sup>4)</sup>              |                     |                      |        |    |    |    |    |    | 96 |
|                               | Application for seawater <sup>4)</sup>               |                     |                      |        |    |    |    |    |    | 97 |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> Accuracy NLH see table

<sup>3)</sup> Please specify the cable length when ordering

<sup>4)</sup> Please specify the measuring medium when ordering


## Standard products (extra short lead time)

| Product No. | Type Code | Pressure range [bar] | Over pressure max. [bar] | Supply [VDC] | Accuracy @ 25°C typ. [%] |
|-------------|-----------|----------------------|--------------------------|--------------|--------------------------|
| NAL0.1A     | 8838      | 0...0.1              | 3                        | 9...33       | $\pm 0.5$                |
| NAL0.2A     | 8838      | 0...0.2              | 3                        | 9...33       | $\pm 0.5$                |
| NAL1.0A     | 8838      | 0...1.0              | 3                        | 9...33       | $\pm 0.5$                |


| Specifications                  |                               |  |
|---------------------------------|-------------------------------|--|
| <b>Electrical Data</b>          | Output / supply voltage       | 4...20 mA: 9...33 VDC<br>0...10 VDC: 15...30 VDC   |
|                                 | Load                          | 4...20 mA: $R_L \leq (U_s - 9V)/20 \text{ mA}$<br>0...10 VDC: $R_L > 10 \text{ k}\Omega$ |
|                                 | Rise time                     | typ. 1 ms/10...90%<br>nominal pressure   |
| <b>Environmental Conditions</b> | Media temperature             | -5°C ... +50°C   |
|                                 | Ambient temperature           | -5°C ... +50°C   |
|                                 | Protection                    | Min. IP68  |
|                                 | Humidity                      | Max. 95% relative  |
|                                 | Vibration                     | 6g (25...2000 Hz)  |
|                                 | Shock                         | 50g/ 11 ms   |
| <b>EMC Protection</b>           | Emission                      | EN/IEC 61000-6-3   |
|                                 | Immunity                      | EN/IEC 61000-6-2   |
| <b>Mechanical Data</b>          | Sensor                        | 1.4435 (AISI316L)  |
|                                 | Housing / Pressure connection | 1.4435 (AISI316L) or titanium  |
|                                 | Sealing                       | FKM  |
|                                 | Male electrical plug          | See ordering information   |
|                                 | Weight                        | ~ 220 g  |
|                                 | Mounting torque               | 25 Nm  |

| Accuracy                 |          |             |           |          |
|--------------------------|----------|-------------|-----------|----------|
| Range                    | [bar]    | 0.1 ... 0.5 | 0.5 ... 2 | 2 ... 25 |
| NLH (BSL through 0)      |          |             |           |          |
| P5                       |          | ±0.5        | ±0.5      | ±0.5     |
| P2                       | [% FS]   | ±0.25       | ±0.25     | ±0.25    |
| P1                       |          |             | ±0.1      | ±0.1     |
| Temperature coefficient  |          |             |           |          |
| Zero point -5 ... +50°C  | [% FS/K] | ±0.06       | ±0.03     | ±0.015   |
| Span -5 ... +50°C        |          | ±0.015      | ±0.015    | ±0.015   |
| Long term drift (1 year) | [mbar]   | < 4         | < 4       | < 4      |


## Dimensions

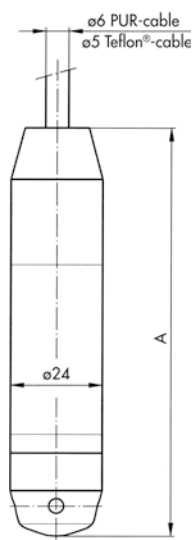


8838.XX.XX.41.XX.XX.XX

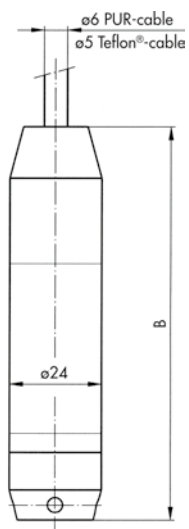

8838.XX.XX.40.XX.XX.XX








8838.XX.XX.15.XX.XX.XX

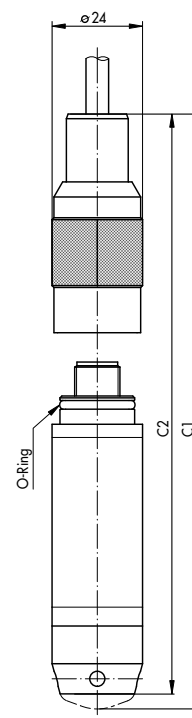

8838.XX.XX.XX.XX.XX.37

|                           | A [mm] | B [mm] | C1 [mm] | C2 [mm] |
|---------------------------|--------|--------|---------|---------|
| Standard                  | 108    | 104    | 135     | 131     |
| With lightning protection | 157    | 153    | 184     | 180     |

## Electrical Connection
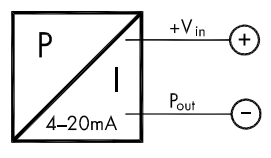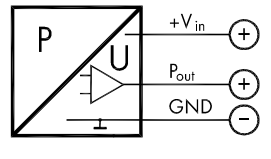
|               |   |        |        | Protection / electrical connection  |  |   |
|---------------|---|--------|--------|---|--|---|
|               |   |        |        | Min. IP68   | Min. IP68  | Min. IP68   |
|               |   |        |        | Cable PUR   | Cable Teflon   | Cable PE  |
|               |   |        |        | <b>22</b>   | <b>32</b>  | <b>29</b>   |
|               |   |        |        |  |  |  |
|               |   |        |        | Venting   | Venting  | Venting   |
| Output signal |  <p><b>8838.xx.xxxx.xx.19</b></p>  | white  | white  | white   |  |   |
|               |   | yellow | yellow | yellow  |  |   |
|               |  <p><b>8838.xx.xxxx.xx.17</b></p> | white  | white  | white   |  |   |
|               |   | brown  | brown  | brown   |  |   |
|               |   | yellow | yellow | yellow  |  |   |

Any manipulation on the ventilation tube will result in warranty loss

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72228">www.trafag.com/H72228</a> |
| Instructions | <a href="http://www.trafag.com/">www.trafag.com/</a>             |
| Flyer        | <a href="http://www.trafag.com/H70681">www.trafag.com/H70681</a> |

# ELECTRONIC PRESSURE SWITCH

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The Electronic Pressure Switch EPN-S is based on the well-proven EPN transmitter family. It stands for reliable accuracy over a wide temperature range and excellent long-term stability even in harshest environments in the shipbuilding and railway industry. The switchpoint is factory set or can be programmed on site using Trafag's Sensor Communicator SC.



## Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools
- Hydraulics
- HVAC

## Features

- Rugged design for harsh environments
- Wide temperature range
- Excellent long-term stability
- Very compact design
- Switchpoint factory set or programmable on site with Trafag Sensor Communicator SC

| Technical Data       |  |                       |  |
|----------------------|--|-----------------------|--|
| Measuring principle  | Thin film on steel                                       | Media temperature     | -40°C ... +125°C   |
| Measuring range      | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi | Ambient temperature   | Standard: -25°C ... +85°C<br>Option accessory 67: -40°C ... +125°C |
| Output signal        | Transistor (open source)                                 | Approval / conformity | DNV-GL   |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ. (Switchpoint)                            |                       |  |

Subject to change

## Ordering information/type code

| Measuring range <sup>1)</sup> | Pressure measurement range [bar]  | Over pressure [bar] | Burst pressure [bar] |     | Pressure measurement range [psi] | Over pressure [psi] | Burst pressure [psi] |     | 8320 . XX | XX | XX | XX | XX | XX |
|-------------------------------|---|---------------------|----------------------|-----|----------------------------------|---------------------|----------------------|-----|-----------|----|----|----|----|----|
|                               |   | 0 ... 2.5           | 5                    | 100 | 75                               | 0 ... 30            | 30                   | 720 | G5        |    |    |    |    |    |
|                               | 0 ... 4   | 8                   | 100                  | 76  | 0 ... 50                         | 115                 | 860                  | G6  |           |    |    |    |    |    |
|                               | 0 ... 6   | 12                  | 100                  | 77  | 0 ... 100                        | 170                 | 1450                 | G7  |           |    |    |    |    |    |
|                               | 0 ... 10  | 20                  | 200                  | 78  | 0 ... 150                        | 290                 | 2900                 | G8  |           |    |    |    |    |    |
|                               | 0 ... 16  | 32                  | 200                  | 79  | 0 ... 250                        | 464                 | 2900                 | G9  |           |    |    |    |    |    |
|                               | 0 ... 25  | 50                  | 300                  | 80  | 0 ... 400                        | 725                 | 4350                 | H0  |           |    |    |    |    |    |
|                               | 0 ... 40  | 80                  | 300                  | 81  | 0 ... 500                        | 1160                | 4350                 | H1  |           |    |    |    |    |    |
|                               | 0 ... 60  | 120                 | 500                  | 82  | 0 ... 1000                       | 1740                | 5800                 | H2  |           |    |    |    |    |    |
|                               | 0 ... 100   | 200                 | 500                  | 83  | 0 ... 1500                       | 2900                | 7250                 | H3  |           |    |    |    |    |    |
|                               | 0 ... 160   | 320                 | 1000                 | 85  | 0 ... 2000                       | 4640                | 10850                | H5  |           |    |    |    |    |    |
|                               | 0 ... 250   | 500                 | 1000                 | 74  | 0 ... 3000                       | 7250                | 14500                | G4  |           |    |    |    |    |    |
|                               | 0 ... 400   | 800                 | 1500                 | 84  | 0 ... 5000                       | 11600               | 21750                | H4  |           |    |    |    |    |    |
|                               | 0 ... 600   | 1000                | 2000                 | 86  | 0 ... 7500                       | 14500               | 29000                | H6  |           |    |    |    |    |    |
| <b>Sensor</b>                 | Relative pressure   |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 23 |
| <b>Pressure connection</b>    | G1/4" male (Seal)   |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 17 |
|                               | 1/4" NPT male   |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 30 |
|                               | G1/2" male (DIN3852-A) <sup>2)</sup>  |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 21 |
|                               | M14x1.5 male (DIN3852-A) <sup>2)</sup>  |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 22 |
|                               | 1/2" NPT male <sup>2)</sup>   |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 51 |
| <b>Electrical connection</b>  | Male electrical plug: EN 175301-803-A (DIN43650-A)  |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 04 |
|                               | Cable with shield: Material: FDR 25 (Raychem) 4 x 0.5mm <sup>2</sup> , -40°C ... +125°C, (Cable length see "Accessories")                     |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 78 |
|                               | Cable with shield: Material: Radox Tenuis-TW 600V MM S (EN45545), 4 x 0.5mm <sup>2</sup> , -40°C ... +120°C, (Cable length see "Accessories") |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 88 |
| <b>Output signal</b>          | 1 Transistor out: switchpoint "ON": ... (bar); switchpoint "OFF": ... (bar); delay time: standard 5 (ms), ... (ms) range: 5...10000 (ms)      |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | T1 |
| <b>Accessories</b>            | Pressure peak damping element ø 0.4 mm  |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 44 |
|                               | Pressure peak damping element ø 1.0 mm  |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 40 |
|                               | Female electrical connector EN 175301-803-A (DIN43650-A)/NBR, -40°C ... +90°C   |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 58 |
|                               | 🚂 Railways version (500 VAC/DC), with shielded cable only   |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 11 |
|                               | Higher operating temperature: -40°C ... +125°C  |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 67 |
|                               | Cable length 1.5 m  |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 1M |
|                               | Cable length 3.0 m  |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 3M |
|                               | Cable length 5.0 m  |                     |                      |     |                                  |                     |                      |     |           |    |    |    |    | 5M |

<sup>1)</sup> Customized pressure ranges upon request

<sup>2)</sup> Please ask us

### Programming device Sensor Communicator SC

#### Ordering No.



- Sensor Communicator SC: F88030
- Programming cable with connector EN 175301-803A: F88049

#### Manual see

- Sensor Communicator SC: [www.trafag.com/H73699](http://www.trafag.com/H73699) (EN) and [www.trafag.com/H73698](http://www.trafag.com/H73698) (DE)






| Specifications         |  |  |
|------------------------|--|--|
| <b>Accuracy</b>        | Accuracy @ 25°C typ.   | ± 0.5 % FS typ. (Switchpoint)  |
|                        | Temperature dependence switching point                                   | Switchpoint @ +25°C: ± 0.5 % FS typ.<br>Switchpoint @ -25°C ... +85°C: ± 1.0 % FS typ.<br>Switchpoint @ -40°C ... +125°C: ± 1.3 % FS typ.<br>(Accessory 67: higher operating temperature -40°C ... +125°C) |
|                        | Long term stability 1 year typ.  | ≤ ± 0.15 % FS typ.   |
| <b>Electrical Data</b> | Supply voltage   | 24 (9 ... 32) VDC  |
|                        | Resistance of insulation   | > 10 MΩ, 250 VDC<br> > 10 MΩ, 500 VDC   |
|                        | Dielectric strength  | 250 VAC, 50 Hz<br> 500 VAC, 50 Hz   |
|                        | Output / supply voltage  | Transistor (open source): 24 (9 ... 32) VDC  |
|                        | Inverse-polarity protection, short-circuit strength @ 25°C during 5 min. | integrated   |
|                        | Current consumption  | ≤ 15 mA  |
|                        | <b>Environmental conditions</b>  | Media temperature  |
| Ambient temperature    |  | Standard: -25°C ... +85°C<br>Option accessory 67: -40°C ... +125°C   |
| Protection             |  | Electrical connection 04: IP65 (IP67)<br>Electrical connection 78/88: IP69K  |
| Humidity               |  | Max. 95 % relative   |
| Vibration              |  | 15 g (50...2000 Hz)  |
| Shock                  |  | 50 g / 11 ms   |
| <b>EMC Protection</b>  |  | Emission   |
|                        | Immunity   | EN/IEC 61000-6-2   |
| <b>Mechanical Data</b> | Sensor (wetted parts)  | 1.4542 (AISI630)   |
|                        | Pressure connection (wetted parts)                                       | Pressure ranges ≤ 250 bar: 1.4542 (AISI630)<br>Pressure ranges > 250 bar: 1.4301 (AISI304)   |
|                        | Housing  | 1.4301 (AISI304)   |
|                        | Sealing  | FKM 70 Sh  |
|                        | Male electrical plug   | See ordering information   |
|                        | Weight   | ~ 85 ... 110 g   |
|                        | Mounting torque  | 25 Nm  |

## Switching output


|                      |   |
|----------------------|---|
| Output signal        | 1 Transistor (open source)  |
| Switchpoint setting  | Switchpoint factory set or programmable on site with Trafag Sensor Communicator SC  |
| Adjustment range     | 0 ... 100 % FS  |
| Switching hysteresis | $\geq 1$ % FS   |
| Switching current    | $\leq 0.5$ A @ -40°C ... +85°C<br>$\leq 0.4$ A @ +85°C ... +125°C (only with accessory 67: higher operating temperature -40°C ... +125°C) |
| Switching resistance | $\leq 3\Omega$  |
| Delay time           | Standard adjustment: 5 ms<br>Adjustable with Trafag Sensor Communicator (only electrical connection 04): 5 ms ... 10 s                    |

## Dimensions



8320.XX.XXXX.04.XX.XX


Switchpoint factory set or programmable on site with Trafag Sensor Communicator SC

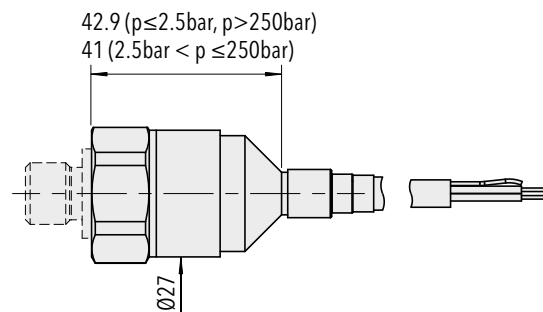


8320.XX.XXXX.78.XX.XX

Switchpoint factory set


8320.XX.XXXX.88.XX.XX




8320.XX.XX17.XX.XX.XX




8320.XX.XX30.XX.XX.XX




8320.XX.XX21.XX.XX.XX



8320.XX.XX22.XX.XX.XX






8320.XX.XX51.XX.XX.XX




1) Tightening torque 50...60Ncm

8320.XX.XXXX.XX.XX.58

## Electrical Connection
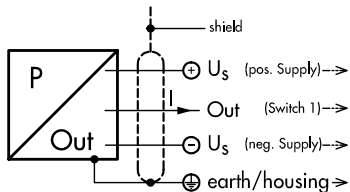
|               |   | Protection / electrical connection   |  |
|---------------|---|--|--|
|               |   | IP65 (IP67)  | IP69K  |
|               |   | Industrial standard<br>EN175301-803A<br><b>04</b><br> | Cable <b>**</b> )<br><b>78/88</b><br>Shield<br> |
| Output signal |  | 1  | brown  |
|               | <b>8320.XX.XXXX.XX.T1</b>   | 2  | blue   |
|               |   | 3  | black  |
|               |   | ⊕  | yellow / green   |

\*\*\*) Ventilation via cable end



Connection of loads to switch contacts

### Additional information

#### Documents

|              |  |
|--------------|--|
| Data sheet   | <a href="http://www.trafag.com/H72333">www.trafag.com/H72333</a> |
| Instructions | <a href="http://www.trafag.com/H73333">www.trafag.com/H73333</a> |
| Flyer        | <a href="http://www.trafag.com/H70652">www.trafag.com/H70652</a> |

# DISPLAY PRESSURE SWITCH

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The DPC 8380 is the ideal combination of pressure switch and transmitter with pressure display. The parameters are set on the device or in a timesaving way via an NFC - smartphone App. The settings in combination with a comprehensive set of options make the DPC 8380 suitable for a wide range of industrial applications.



## Applications

- Machine tools
- HVAC
- Refrigeration
- Water treatment
- Process technology

## Features

- Parametrisation also via NFC-smartphone App (Android)
- Display and electrical connection are independently rotatable 335°/343°
- Analogue output switchable mA or V
- Integrated datalogger
- Pressure range adjustable, 50 ... 100 % of the nominal range

## Technical Data

|                      |   |                           |  |
|----------------------|---|---------------------------|--|
| Measuring principle  | Thick film on ceramic   | Media temperature         | -25°C ... +85°C  |
| Measuring range      | 0 ... 0.2 to 0 ... 100 bar<br>0 ... 2.5 to 0 ... 1500 psi<br>adjustable 50 ... 100 % FS | Ambient temperature       | -25°C ... +85°C  |
| Output signal        | 4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC,<br>0 ... 10 VDC, switchable mA or V              | Pressure unit for display | bar, psi, MPa, kPa, m WC, mm WC  |
| Switching output     | 2 transistors PNP   | Logger                    | Ring buffer: 3518 data points<br>Sampling time: 0.1 ... 999.9 s, Off (0) |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ.   |                           |  |

Subject to change

## Ordering information/type code

|  |   |  |                             | 8380 . XX   | XX         | XX   | XX        | XX        | XX        |  |
|--|---|--|-----------------------------|---|------------|--|-----------|-----------|-----------|--|
| <b>Measuring range <sup>1)</sup></b>                               | <b>Pressure measurement range [bar]</b>   | <b>Over pressure [bar]</b>                 | <b>Burst pressure [bar]</b> |   |            |  |           |           |           |  |
|  | 0 ... 0.2   | 1.2  | 2                           | <b>68</b>   | 0 ... 2.5  | 15   | 30        | <b>F8</b> |           |  |
|  | 0 ... 0.4   | 1.2  | 2                           | <b>69</b>   | 0 ... 5    | 15   | 30        | <b>F9</b> |           |  |
|  | 0 ... 0.6   | 2  | 3                           | <b>70</b>   | 0 ... 7.5  | 30   | 45        | <b>G0</b> |           |  |
|  | 0 ... 1   | 2  | 4.8                         | <b>71</b>   | 0 ... 15   | 45   | 70        | <b>G1</b> |           |  |
|  | 0 ... 1.6   | 3.2  | 4.8                         | <b>73</b>   | 0 ... 20   | 45   | 70        | <b>G3</b> |           |  |
|  | 0 ... 2.5   | 5  | 7.5                         | <b>75</b>   | 0 ... 30   | 60   | 90        | <b>G5</b> |           |  |
|  | 0 ... 4   | 8  | 12                          | <b>76</b>   | 0 ... 50   | 100  | 150       | <b>G6</b> |           |  |
|  | 0 ... 6   | 12   | 15                          | <b>77</b>   | 0 ... 100  | 200  | 250       | <b>G7</b> |           |  |
|  | 0 ... 10  | 20   | 25                          | <b>78</b>   | 0 ... 150  | 300  | 375       | <b>G8</b> |           |  |
|  | 0 ... 16  | 32   | 40                          | <b>79</b>   | 0 ... 250  | 500  | 625       | <b>G9</b> |           |  |
|  | 0 ... 25  | 50   | 75                          | <b>80</b>   | 0 ... 400  | 800  | 1200      | <b>H0</b> |           |  |
|  | 0 ... 40  | 80   | 100                         | <b>81</b>   | 0 ... 500  | 1000   | 1250      | <b>H1</b> |           |  |
|  | 0 ... 60  | 120  | 180                         | <b>82</b>   | 0 ... 1000 | 2000   | 3000      | <b>H2</b> |           |  |
|  | 0 ... 100   | 200  | 300                         | <b>83</b>   | 0 ... 1500 | 3000   | 4500      | <b>H3</b> |           |  |
|  | <b>Sensor</b>   | Relative pressure, 1.4305, accuracy: 0.5 % |                             |   | <b>57</b>  | Absolute pressure, 1.4305, accuracy: 0.5 % <sup>3)</sup> |           |           | <b>87</b> |  |
| Relative pressure, 1.4404/1.4435, accuracy: 0.5 % <sup>4)</sup>    |   |  | <b>59</b>                   | Absolute pressure, 1.4404/1.4435, accuracy: 0.5 % <sup>3) 4)</sup>    |            |  | <b>89</b> |           |           |  |
| Relative pressure, 1.4462, accuracy: 0.5 % <sup>4)</sup>           |   |  | <b>52</b>                   | Absolute pressure, 1.4462, accuracy: 0.5 % <sup>3) 4)</sup>           |            |  | <b>82</b> |           |           |  |
| Relative pressure, titanium grade 5, accuracy: 0.5 % <sup>4)</sup> |   |  | <b>53</b>                   | Absolute pressure, Titanium Grade 5, accuracy: 0.5 % <sup>3) 4)</sup> |            |  | <b>83</b> |           |           |  |
| <b>Pressure connection</b>   | G1/4" female  |  | <b>10</b>                   | 7/16"-20UNF male, DIN3866 <sup>4)</sup>                               |            |  | <b>18</b> |           |           |  |
|  | G1/4" male  |  | <b>17</b>                   | 7/16"-20UNF female SAE J512 with valve opener <sup>4)</sup>           |            |  | <b>24</b> |           |           |  |
|  | G1/2" male DIN3852-E <sup>4)</sup>  |  | <b>41</b>                   | 7/16"-20UNF female SAE4 <sup>4)</sup>                                 |            |  | <b>42</b> |           |           |  |
|  | 1/4" NPT male <sup>4)</sup>   |  | <b>30</b>                   | G3/4" frontal membrane <sup>4) 6)</sup>                               |            |  | <b>52</b> |           |           |  |
|  | R1/4" male, DIN3858 <sup>4)</sup>   |  | <b>19</b>                   |   |            |  |           |           |           |  |
| <b>Electrical connection</b>                                       | Male electrical plug M12x1, 4-pole, Mat. PA (Accessories P3, P4)                            |  |                             |   |            |  | <b>32</b> |           |           |  |
|  | Male electrical plug M12x1, 5-pole, Mat. PA (Accessories P1, P2)                            |  |                             |   |            |  | <b>35</b> |           |           |  |
| <b>Output signal</b>   | Switching output PNP, current output 4 ... 20 mA; output detail see accessories P1, P2, P3  |  |                             |   |            |  |           | <b>PA</b> |           |  |
|  | Switching output PNP, voltage output 1 ... 6 VDC; output detail see accessories P1, P2, P3  |  |                             |   |            |  |           | <b>PU</b> |           |  |
|  | Switching output PNP, voltage output 0 ... 10 VDC; output detail see accessories P1, P2, P3 |  |                             |   |            |  |           | <b>PV</b> |           |  |
|  | Switching output PNP, voltage output 0 ... 5 VDC; output detail see accessories P1, P2, P3  |  |                             |   |            |  |           | <b>PW</b> |           |  |
|  | Switching output PNP; output detail see accessory P4  |  |                             |   |            |  |           | <b>PS</b> |           |  |
| <b>Accessories</b>   | Pin configuration 5-pole.; 1: U+, 2: analogue, 3: U-, 4: SP1, 5: SP2                        |  |                             |   |            |  |           | <b>P1</b> |           |  |
|  | Pin configuration 5-pole.; 1: U+, 2: SP2, 3: U-, 4: SP1, 5: analogue                        |  |                             |   |            |  |           | <b>P2</b> |           |  |
|  | Pin configuration 4-pole.; 1: U+, 2: analogue, 3: U-, 4: SP1                                |  |                             |   |            |  |           | <b>P3</b> |           |  |
|  | Pin configuration 4-pole.; 1: U+, 2: SP2, 3: U-, 4: SP1                                     |  |                             |   |            |  |           | <b>P4</b> |           |  |
|  | Pressure peak damping element ø 1.0 mm (for pressure connections 17 and 30)                 |  |                             |   |            |  |           | <b>40</b> |           |  |
|  | Pressure peak damping element ø 0.4 mm (for pressure connections 17 and 30)                 |  |                             |   |            |  |           | <b>44</b> |           |  |
|  | Seal FPM, -18°C ... +125°C  |  |                             |   |            |  |           | <b>61</b> |           |  |
|  | Seal EPDM, -40°C ... +125°C   |  |                             |   |            |  |           | <b>63</b> |           |  |
|  | Female electrical plug M12x1, 5-pole <sup>5)</sup>  |  |                             |   |            |  |           | <b>33</b> |           |  |
|  | Parametrisation standard (see table Parameter)  |  |                             |   |            |  |           | <b>ZS</b> |           |  |
|  | Parametrisation according to customer specifications (see table Parameter)                  |  |                             |   |            |  |           | <b>ZC</b> |           |  |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>3)</sup> Absolute ranges max. 40 bar

<sup>4)</sup> Please ask us

<sup>5)</sup> For electrical connections 32 and 35


<sup>6)</sup> Not for sensors 57 and 87, only for pressure ranges ≤ 10 bar or 150 psi

| Parameter  |                                    |  |           |                                    |
|--|------------------------------------|--|-----------|------------------------------------|
| Name   | Standard adjustment (Accessory ZS) | Value range  | Shortname | Customer adjustment (Accessory ZC) |
| Switch point SP1 (hysteresis mode)<br>Upper switch point FH1 (window mode)                 | 75 % Measuring range               | SP1 > RP1<br>FH1 > FL1<br>Hysteresis ≥ 1 % d.S.  | SP1       |                                    |
| Reset point RP1 (hysteresis mode)<br>Lower switch point FL1 (window mode)                  | 25 % Measuring range               | RP1 < SP1<br>FL1 < FH1<br>Hysteresis ≥ 1 % d.S.  | RP1       |                                    |
| Switch point SP2 (hysteresis mode)<br>Upper switch point FH2 (window mode)                 | 75 % Measuring range               | SP2 > RP2<br>FH2 > FL2<br>Hysteresis ≥ 1 % d.S.  | SP2       |                                    |
| Reset point RP2 (hysteresis mode)<br>Lower switch point FL2 (window mode)                  | 25 % Measuring range               | RP2 < SP2<br>FL2 < FH2<br>Hysteresis ≥ 1 % d.S.  | RP2       |                                    |
| Switch point delay time SP1 (hysteresis mode)<br>Switch point delay time FH1 (window mode) | 0                                  | 0 ... 99.99 s  | dS1       |                                    |
| Switch point delay time RP1 (hysteresis mode)<br>Switch point delay time FL1 (window mode) | 0                                  | 0 ... 99.99 s  | dR1       |                                    |
| Switch point delay time SP2 (hysteresis mode)<br>Switch point delay time FH2 (window mode) | 0                                  | 0 ... 99.99 s  | dS2       |                                    |
| Switch point delay time RP2 (hysteresis mode)<br>Switch point delay time FL2 (window mode) | 0                                  | 0 ... 99.99 s  | dR2       |                                    |
| Function switching output 1  | Hysteresis, closer (Hno)           | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno),<br>Window NC (Fnc)                         | ou1       |                                    |
| Function switching output 2  | Hysteresis, closer (Hno)           | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno),<br>Window NC (Fnc)                         | ou2       |                                    |
| Pressure unit  | bar                                | bar, psi, MPa, kPa, m WC   | uni       |                                    |
| Measuring range adjustment   | 100 % Nominal pressure             | 50 ... 100 % Nominal   | P-EP      |                                    |
| Damping analogue output  | 0.01 s                             | 0.01 ... 3.00 s (time constant)  | dAA       |                                    |
| Display rotation   | No                                 | No, yes (180°)   | disr      |                                    |
| Display mode   | Current pressure value             | Pressure value: current, highest, lowest, display off<br>Current value: decimal places selectable (max. 3) | dis       |                                    |
| Display actualisation  | 2                                  | 1, 2, 5, 20 Hz   | duPd      |                                    |

| Specifications                  |  |   |
|---------------------------------|--|---|
| <b>Electrical Data</b>          | Output / supply voltage  | 4 ... 20 mA: 24 (15 ... 30) VDC<br>0 ... 5 VDC: 24 (15 ... 30) VDC<br>1 ... 6 VDC: 24 (15 ... 30) VDC<br>0 ... 10 VDC: 24 (15 ... 30) VDC |
|                                 | Switch-on-delay  | Typ. 200 ms   |
|                                 | Inverse-polarity protection, short-circuit strength @ 25°C during 5 min. | integrated  |
|                                 | Current consumption  | ≤ 30 mA   |
| <b>Environmental conditions</b> | Media temperature  | -25°C ... +85°C   |
|                                 | Ambient temperature  | -25°C ... +85°C   |
|                                 | Protection <sup>1)</sup>   | IP67  |
|                                 | Humidity   | Max. 95 % relative  |
|                                 | Vibration  | 10 g (10 ... 2000 Hz)   |
|                                 | Shock  | 50 g / 3 ms   |
| <b>EMC Protection</b>           | Emission   | EN/IEC 61000-6-3  |
|                                 | Immunity   | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)  | Ceramic, Al <sub>2</sub> O <sub>3</sub> (96 %)  |
|                                 | Pressure connection (wetted parts)                                       | 57/87: 1.4305 (AISI303)<br>59/89: 1.4404/1.4435 (AISI316L)<br>52/82: 1.4462 (AISI318LN)<br>53/83: Titanium Grade 5                        |
|                                 | Housing  | Zinc based die-casting alloy, nickel plated<br>display housing plastic  |
|                                 | Sealing  | FPM, EPDM   |
|                                 | Male electrical plug   | See ordering information  |
|                                 | Weight   | ~ 189 g   |
|                                 | Mounting torque  | 15 ... 20 Nm  |
|                                 | Housing alignment  | Display 335° rotatable, max. 2.5 Nm<br>Electrical connection 343° rotatable, max. 5 Nm  |

<sup>1)</sup> See electrical connection

## Measuring accuracy 0.5 %

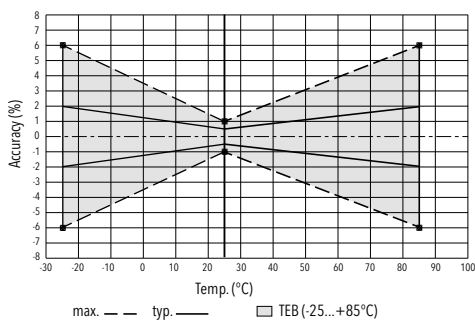

## Analogue output

|                                |  |               |        |
|--------------------------------|--|---------------|--------|
| Output signal                  | Switchable 4 ... 20 mA or voltage              |               |        |
| Accuracy                       | TEB @ -25 ... +85°C                            | [% FS typ.]   | ± 2.0  |
|                                | Accuracy @ +25°C                               | [% FS typ.]   | ± 0.5  |
|                                | NLH @ +25°C (BSL)                              | [% FS typ.]   | ± 0.2  |
|                                | TC zero point and span                         | [% FS/K typ.] | ± 0.03 |
|                                | Long term stability 1 year                     | [% FS typ.]   | ± 0.3  |
| Current limiting output signal | 4 ... 20 mA: 25 mA (overload)                  |               |        |
|                                | 0 ... 10 VDC: < 40 mA (short-circuit)          |               |        |
| Damping (rise time)            | 0.01 ... 3.00 s / 10 ... 90 % Nominal pressure |               |        |

## Switching output


|                                  |  |             |         |
|----------------------------------|--|-------------|---------|
| Accuracy                         | Accuracy @ +25°C   | [% FS typ.] | ± 0.5   |
|                                  | TEB @ -25 ... +85°C  | [% FS typ.] | ± 2.0   |
|                                  | Long term stability 1 year                                   | [% FS typ.] | ≤ ± 0.3 |
| Adjustment range of switchpoints | 0 ... 100 % FS   |             |         |
| Switching hysteresis             | ≥ 1 % FS   |             |         |
|                                  | Switchpoint > reset point                                    |             |         |
| Switching resistance             | ≤ 3 Ω  |             |         |
| Output function                  | Hysteresis, Window; normally closed (NO), normally open (NC) |             |         |
| Switching current                | ≤ 0.5 A each switching output                                |             |         |
| Current limiting                 | ≤ 2 A each switching output                                  |             |         |
| Switching frequency              | max. 200 Hz  |             |         |
| Delay time                       | 0 ... 99.99 s  |             |         |

## Display


|                             |  |
|-----------------------------|--|
| Display                     | 4-digit 7-segment display 180° flippable with disable function<br>Standard decimal places:<br>≤ 9: 3 decimal places<br>10 ... 99: 2 decimal places<br>100 ... 999: 1 decimal place |
| Switching status indication | 2 LED, red   |
| Operation                   | With 3 buttons and menu navigation according to VDMA 24574-1   |
| Display resolution          | 0.1 % FS   |
| Display range               | -3 ... 103 % FS  |
| Setting parameters          | See table Parameter  |




## Dimensions

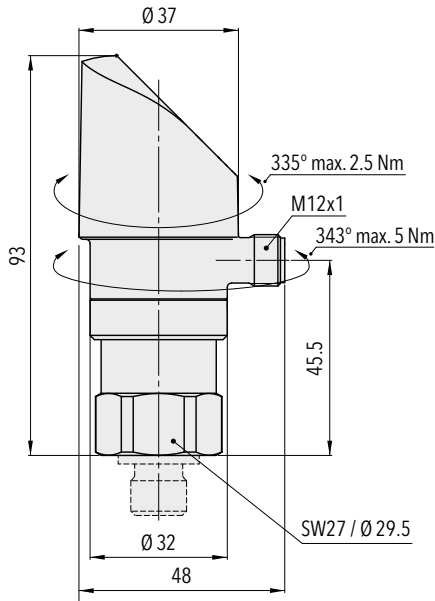


8380.XX.XXXX.35/32.XX.XX




8380.XX.XX10.XX.XX.XX




8380.XX.XX17.XX.XX.XX




8380.XX.XX41.XX.XX.XX




8380.XX.XX30.XX.XX.XX




8380.XX.XX19.XX.XX.XX




8380.XX.XX18.XX.XX.XX




8380.XX.XX24.XX.XX.XX





8380.XX.XX42.XX.XX.XX



8380.XX.XXXX.XX.XX.33



8380.XX.XX52.XX.XX.XX



Welding flange for  
G3/4" frontal membrane (1.4301)  
Ordering No. C27805


## Electrical connection

|                   |   | Protection / electrical connection  |                                     |                                |                                     |
|-------------------|---|-------------------------------------|-------------------------------------|--------------------------------|-------------------------------------|
|                   |   | IP67*)                              |                                     |                                |                                     |
|                   |   | M12x1                               |                                     |                                |                                     |
|                   |   | 5-pole4-pole                        |                                     |                                |                                     |
|                   |   | 35                                  |                                     | 32                             |                                     |
|                   |   |                                     |                                     |                                |                                     |
| Output signal     |   | P1                                  | P2                                  | P3                             | P4                                  |
|                   | PA  | ✓                                   | ✓                                   | ✓                              |                                     |
|                   | PU  | ✓                                   | ✓                                   | ✓                              |                                     |
|                   | PV  | ✓                                   | ✓                                   | ✓                              |                                     |
|                   | PW  | ✓                                   | ✓                                   | ✓                              |                                     |
|                   | PS  |                                     |                                     |                                | ✓                                   |
| Pin Configuration |   | P1                                  | P2                                  | P3                             | P4                                  |
|                   | <b>8380.XX.XXXX.XX.PA/PU/PV/PW/PS</b><br>U <sub>S</sub> +<br>U <sub>S</sub> -<br>Out analogue<br>SP1<br>SP2<br>Shield ***<br>Shield ***<br>Shield *** | 1<br>3<br>2<br>4<br>5<br>Shield *** | 1<br>3<br>5<br>4<br>2<br>Shield *** | 1<br>3<br>2<br>4<br>Shield *** | 1<br>3<br>-<br>4<br>2<br>Shield *** |

Connection of loads to switching output

\*) Provided female connector is mounted according to instructions  
 \*\*\*) The use of a shielded cable is recommended

## Functions switching output

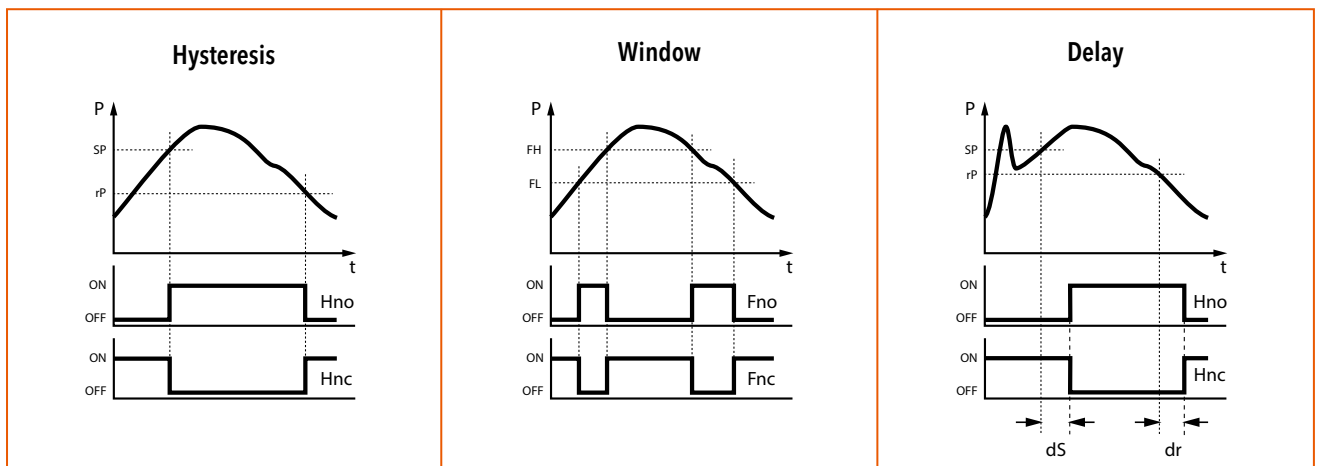

| Additional information |              |  |
|------------------------|--------------|--|
| Documents              | Data sheet   | <a href="http://www.trafag.com/H72320">www.trafag.com/H72320</a> |
|                        | Instructions | <a href="http://www.trafag.com/H73320">www.trafag.com/H73320</a> |
|                        | Flyer        | <a href="http://www.trafag.com/H70691">www.trafag.com/H70691</a> |

# DISPLAY PRESSURE SWITCH

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The DPC 8381 is the ideal combination of pressure switch and transmitter with a pressure display. The parameters are set on the device or in a timesaving way via an NFC - smartphone App. The settings in combination with a comprehensive set of options make the DPS 8381 suitable for a wide range of demanding applications.



## Applications

- Machine tools
- Hydraulics
- Process technology
- Industrial applications

## Features

- Parametrisation also via NFC-smartphone App (Android)
- Display and electrical connection are independently rotatable 335°/343°
- Analogue output switchable mA or V
- Integrated datalogger
- Pressure range adjustable, 50 ... 100 % of the nominal range

## Technical Data

|                      |  |                           |  |
|----------------------|--|---------------------------|--|
| Measuring principle  | Thin film on steel   | Media temperature         | -25°C ... +85°C  |
| Measuring range      | 0 ... 2.5 to 0 ... 600 bar<br>0 ... 30 to 0 ... 7500 psi<br>adjustable 50 ... 100 % FS | Ambient temperature       | -25°C ... +85°C  |
| Output signal        | 4 ... 20 mA, 0 ... 5 VDC, 1 ... 6 VDC,<br>0 ... 10 VDC, switchable mA or V             | Pressure unit for display | bar, psi, MPa, kPa, m WC, mm WC  |
| Switching output     | 2 transistors PNP  | Logger                    | Ring buffer: 3518 data points<br>Sampling time: 0.1 ... 999.9 s, Off (0) |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ.  |                           |  |

Subject to change

## Ordering information/type code

|                                      |   |                                    |                             |           |  |                            | 8381 . XX                   | XX        | XX        | XX        | XX | XX        |
|--------------------------------------|---|------------------------------------|-----------------------------|-----------|--|----------------------------|-----------------------------|-----------|-----------|-----------|----|-----------|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range [bar]</b>   | <b>Over pressure [bar]</b>         | <b>Burst pressure [bar]</b> |           | <b>Pressure measurement range [psi]</b>                        | <b>Over pressure [psi]</b> | <b>Burst pressure [psi]</b> |           |           |           |    |           |
|                                      | 0 ... 2.5   | 7.5                                | 50                          | <b>75</b> | 0 ... 30   | 90                         | 700                         | <b>G5</b> |           |           |    |           |
|                                      | 0 ... 4   | 12                                 | 60                          | <b>76</b> | 0 ... 50   | 150                        | 850                         | <b>G6</b> |           |           |    |           |
|                                      | 0 ... 6   | 18                                 | 100                         | <b>77</b> | 0 ... 100  | 300                        | 1450                        | <b>G7</b> |           |           |    |           |
|                                      | 0 ... 10  | 30                                 | 200                         | <b>78</b> | 0 ... 150  | 450                        | 2500                        | <b>G8</b> |           |           |    |           |
|                                      | 0 ... 16  | 48                                 | 200                         | <b>79</b> | 0 ... 200  | 600                        | 2500                        | <b>GA</b> |           |           |    |           |
|                                      | 0 ... 25  | 75                                 | 300                         | <b>80</b> | 0 ... 250  | 750                        | 2500                        | <b>G9</b> |           |           |    |           |
|                                      | 0 ... 40  | 120                                | 300                         | <b>81</b> | 0 ... 300  | 900                        | 4000                        | <b>HA</b> |           |           |    |           |
|                                      | 0 ... 60  | 180                                | 400                         | <b>82</b> | 0 ... 400  | 1200                       | 4000                        | <b>HO</b> |           |           |    |           |
|                                      | 0 ... 100   | 300                                | 500                         | <b>83</b> | 0 ... 500  | 1500                       | 4000                        | <b>H1</b> |           |           |    |           |
|                                      | 0 ... 160   | 480                                | 750                         | <b>85</b> | 0 ... 1000   | 3000                       | 5000                        | <b>H2</b> |           |           |    |           |
|                                      | 0 ... 250   | 750                                | 1000                        | <b>74</b> | 0 ... 1500   | 4500                       | 7000                        | <b>H3</b> |           |           |    |           |
|                                      | 0 ... 400   | 1000                               | 2000                        | <b>84</b> | 0 ... 2000   | 6000                       | 10000                       | <b>H5</b> |           |           |    |           |
|                                      | 0 ... 600   | 1500                               | 2500                        | <b>86</b> | 0 ... 3000   | 9000                       | 14500                       | <b>G4</b> |           |           |    |           |
|                                      |   |                                    |                             |           | 0 ... 5000   | 12500                      | 21750                       | <b>H4</b> |           |           |    |           |
|                                      |   |                                    |                             |           | 0 ... 7500   | 18750                      | 29000                       | <b>H6</b> |           |           |    |           |
|                                      | <b>Sensor</b>   | Relative pressure, accuracy: 0.5 % |                             |           |  |                            |                             |           |           | <b>25</b> |    |           |
| <b>Pressure connection</b>           | G1/4" female <sup>2)</sup>  |                                    | <b>10</b>                   |           | 1/2" NPT male <sup>2)</sup>                                    |                            |                             | <b>51</b> |           |           |    |           |
|                                      | G1/4" male (Seal)   |                                    | <b>17</b>                   |           | M14x1.5 male DIN6149-2 <sup>2)</sup>                           |                            |                             | <b>31</b> |           |           |    |           |
|                                      | R1/4" male, DIN3858 <sup>2)</sup>   |                                    | <b>19</b>                   |           | 7/16"-20UNF male, DIN3866 <sup>2) 4)</sup>                     |                            |                             | <b>18</b> |           |           |    |           |
|                                      | G1/2" male (Manometer) <sup>2)</sup>  |                                    | <b>11</b>                   |           | 7/16"-20UNF male SAE4 (J1926) <sup>2) 5)</sup>                 |                            |                             | <b>42</b> |           |           |    |           |
|                                      | 1/4" NPT male <sup>2)</sup>   |                                    | <b>30</b>                   |           | 7/16"-20UNF female SAE J512 with valve opener <sup>2) 4)</sup> |                            |                             | <b>24</b> |           |           |    |           |
| <b>Electrical connection</b>         | Male electrical plug M12x1, 4-pole, Mat. PA (Accessories P3, P4)                            |                                    |                             |           |  |                            |                             |           | <b>32</b> |           |    |           |
|                                      | Male electrical plug M12x1, 5-pole, Mat. PA (Accessories P1, P2)                            |                                    |                             |           |  |                            |                             |           | <b>35</b> |           |    |           |
| <b>Output signal</b>                 | Switching output PNP, current output 4 ... 20 mA; output detail see accessories P1, P2, P3  |                                    |                             |           |  |                            |                             |           |           |           |    | <b>PA</b> |
|                                      | Switching output PNP, voltage output 1 ... 6 VDC; output detail see accessories P1, P2, P3  |                                    |                             |           |  |                            |                             |           |           |           |    | <b>PU</b> |
|                                      | Switching output PNP, voltage output 0 ... 10 VDC; output detail see accessories P1, P2, P3 |                                    |                             |           |  |                            |                             |           |           |           |    | <b>PV</b> |
|                                      | Switching output PNP, voltage output 0 ... 5 VDC; output detail see accessories P1, P2, P3  |                                    |                             |           |  |                            |                             |           |           |           |    | <b>PW</b> |
|                                      | Switching output PNP; output detail see accessory P4  |                                    |                             |           |  |                            |                             |           |           |           |    | <b>PS</b> |
| <b>Accessories</b>                   | Pin configuration 5-pole.; 1: U+, 2: analogue, 3: U-, 4: SP1, 5: SP2                        |                                    |                             |           |  |                            |                             |           |           |           |    | <b>P1</b> |
|                                      | Pin configuration 5-pole.; 1: U+, 2: SP2, 3: U-, 4: SP1, 5: analogue                        |                                    |                             |           |  |                            |                             |           |           |           |    | <b>P2</b> |
|                                      | Pin configuration 4-pole.; 1: U+, 2: analogue, 3: U-, 4: SP1                                |                                    |                             |           |  |                            |                             |           |           |           |    | <b>P3</b> |
|                                      | Pin configuration 4-pole.; 1: U+, 2: SP2, 3: U-, 4: SP1                                     |                                    |                             |           |  |                            |                             |           |           |           |    | <b>P4</b> |
|                                      | Pressure peak damping element ø 1.0 mm (for pressure connections 17 and 30)                 |                                    |                             |           |  |                            |                             |           |           |           |    | <b>40</b> |
|                                      | Pressure peak damping element ø 0.4 mm (for pressure connections 17 and 30)                 |                                    |                             |           |  |                            |                             |           |           |           |    | <b>44</b> |
|                                      | Seal FPM, -18°C ... +125°C  |                                    |                             |           |  |                            |                             |           |           |           |    | <b>61</b> |
|                                      | Seal EPDM, -40°C ... +125°C   |                                    |                             |           |  |                            |                             |           |           |           |    | <b>63</b> |
|                                      | Seal NBR, -25°C ... +100°C  |                                    |                             |           |  |                            |                             |           |           |           |    | <b>83</b> |
|                                      | Female electrical plug M12x1, 5-pole <sup>3)</sup>  |                                    |                             |           |  |                            |                             |           |           |           |    | <b>33</b> |
|                                      | Parametrisation standard (see table Parameter)  |                                    |                             |           |  |                            |                             |           |           |           |    | <b>ZS</b> |
|                                      | Parametrisation according to customer specifications (see table Parameter)                  |                                    |                             |           |  |                            |                             |           |           |           |    | <b>ZC</b> |

<sup>1)</sup> Extended overpressure as well as customized pressure ranges upon request

<sup>2)</sup> Upon request

<sup>3)</sup> For electrical connections 32 and 35

<sup>4)</sup> Max. allowable pressure range 60 bar at 120 bar overpressure


<sup>5)</sup> According to norm J1926, max. 35 MPa

| Parameter  |                                 |   |            |                                    |
|--|---------------------------------|---|------------|------------------------------------|
| Name   | Standard setting (accessory ZS) | Value range   | Short name | Customer adjustment (accessory ZC) |
| Switch point SP1 (hysteresis mode)<br>Upper switch point FH1 (window mode)                 | 75 % Measuring range            | SP1 > RP1<br>FH1 > FL1<br>Hysteresis ≥ 1 % FS   | SP1        |                                    |
| Reset point RP1 (hysteresis mode)<br>Lower switch point FL1 (window mode)                  | 25 % Measuring range            | RP1 < SP1<br>FL1 < FH1<br>Hysteresis ≥ 1 % FS   | RP1        |                                    |
| Switch point SP2 (hysteresis mode)<br>Upper switch point FH2 (window mode)                 | 75 % Measuring range            | SP2 > RP2<br>FH2 > FL2<br>Hysteresis ≥ 1 % FS   | SP2        |                                    |
| Reset point RP2 (hysteresis mode)<br>Lower switch point FL2 (window mode)                  | 25 % Measuring range            | RP2 < SP2<br>FL2 < FH2<br>Hysteresis ≥ 1 % FS   | RP2        |                                    |
| Switch point delay time SP1 (hysteresis mode)<br>Switch point delay time FH1 (window mode) | 0                               | 0 ... 99.99 s   | dS1        |                                    |
| Switch point delay time RP1 (hysteresis mode)<br>Switch point delay time FL1 (window mode) | 0                               | 0 ... 99.99 s   | dR1        |                                    |
| Switch point delay time SP2 (hysteresis mode)<br>Switch point delay time FH2 (window mode) | 0                               | 0 ... 99.99 s   | dS2        |                                    |
| Switch point delay time RP2 (hysteresis mode)<br>Switch point delay time FL2 (window mode) | 0                               | 0 ... 99.99 s   | dR2        |                                    |
| Functions switching output 1   | Hysteresis, closer (Hno)        | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno), Window NC (Fnc)                               | ou1        |                                    |
| Functions switching output 2   | Hysteresis, closer (Hno)        | Hysteresis NO (Hno),<br>Hysteresis NC (Hnc)<br>Window NO (Fno), Window NC (Fnc)                               | ou2        |                                    |
| Pressure units   | bar                             | bar, psi, MPa, kPa, m WC  | uni        |                                    |
| Measuring range adjustment   | 100 % Nominal pressure          | 50 ... 100 % Nominal  | P-EP       |                                    |
| Damping (analogue output)  | 0.01 s                          | 0.01 ... 3.00 s (time constant)   | dAA        |                                    |
| Display rotation   | No                              | no, yes (180°)  | disr       |                                    |
| Display mode   | Current pressure value          | Pressure value: current, highest, lowest,<br>display off<br>Current value: decimal places selectable (max. 3) | dis        |                                    |
| Display actualisation  | 2                               | 1, 2, 5, 20 Hz  | duPd       |                                    |

| Specifications                  |  |   |
|---------------------------------|--|---|
| <b>Electrical Data</b>          | Output / supply voltage  | 4 ... 20 mA: 24 (15 ... 30) VDC<br>0 ... 5 VDC: 24 (15 ... 30) VDC<br>1 ... 6 VDC: 24 (15 ... 30) VDC<br>0 ... 10 VDC: 24 (15 ... 30) VDC |
|                                 | Switch-on-delay  | Typ. 200 ms   |
|                                 | Inverse-polarity protection, short-circuit strength @ 25°C during 5 min. | integrated  |
|                                 | Current consumption  | ≤ 30 mA   |
| <b>Environmental conditions</b> | Media temperature  | -25°C ... +85°C   |
|                                 | Ambient temperature  | -25°C ... +85°C   |
|                                 | Protection <sup>1)</sup>   | IP67  |
|                                 | Humidity   | Max. 95 % relative  |
|                                 | Vibration  | 10 g (10 ... 2000 Hz)   |
|                                 | Shock  | 50 g / 3 ms   |
| <b>EMC Protection</b>           | Emission   | EN/IEC 61000-6-3  |
|                                 | Immunity   | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)  | 1.4542 (AISI630)  |
|                                 | Pressure connection (wetted parts)                                       | 1.4542 (AISI630)  |
|                                 | Housing  | Zinc based die-casting alloy, nickel plated display housing plastic   |
|                                 | Sealing  | FPM, NBR, EPDM  |
|                                 | Male electrical plug   | See ordering information  |
|                                 | Weight   | ~ 189 g   |
|                                 | Mounting torque  | 15 ... 20 Nm  |
|                                 | Housing alignment  | Display 335° rotatable, max. 2.5 Nm<br>Electrical connection 343° rotatable, max. 5 Nm  |

<sup>1)</sup> See electrical connection

## Measuring accuracy 0.5 %

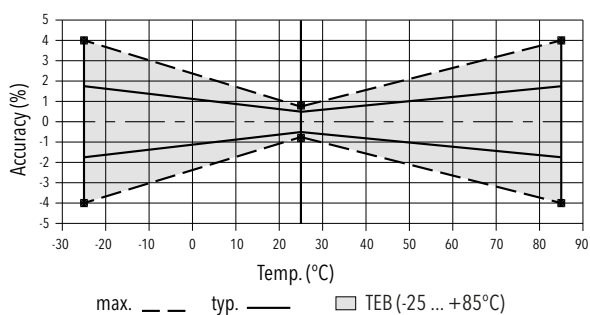

## Analogue output

|                                |  |               |        |
|--------------------------------|--|---------------|--------|
| Output signal                  | Switchable 4 ... 20 mA or voltage              |               |        |
| Accuracy                       | TEB @ -25 ... +85°C                            | [% FS typ.]   | ± 1.75 |
|                                | Accuracy @ +25°C                               | [% FS typ.]   | ± 0.5  |
|                                | NLH @ +25°C (BSL)                              | [% FS typ.]   | ± 0.2  |
|                                | TC zero point and span                         | [% FS/K typ.] | ± 0.03 |
|                                | Long term stability 1 year                     | [% FS typ.]   | ± 0.1  |
| Current limiting output signal | 4 ... 20 mA: 25 mA (overload)                  |               |        |
|                                | 0 ... 10 VDC: < 40 mA (short-circuit)          |               |        |
| Damping (rise time)            | 0.01 ... 3.00 s / 10 ... 90 % Nominal pressure |               |        |


## Switching output

|                                  |  |             |         |
|----------------------------------|--|-------------|---------|
| Accuracy                         | Accuracy @ +25°C   | [% FS typ.] | ± 0.5   |
|                                  | TEB @ -25 ... +85°C  | [% FS typ.] | ± 1.0   |
|                                  | Long term stability 1 year                                   | [% FS typ.] | ≤ ± 0.3 |
| Adjustment range of switchpoints | 0 ... 100 % FS   |             |         |
| Switching hysteresis             | ≥ 1 % FS   |             |         |
|                                  | Switchpoint > reset point                                    |             |         |
| Switching resistance             | ≤ 3 Ω  |             |         |
| Output function                  | Hysteresis, Window; normally closed (NO), normally open (NC) |             |         |
| Switching current                | ≤ 0.5 A each switching output                                |             |         |
| Current limiting                 | ≤ 2 A each switching output                                  |             |         |
| Switching frequency              | max. 200 Hz  |             |         |
| Delay time                       | 0 ... 99.99 s  |             |         |


## Display

|                             |  |
|-----------------------------|--|
| Display                     | 4-digit 7-segment display 180° flippable with disable function<br>Standard decimal places:<br>≤ 9: 3 decimal places<br>10 ... 99: 2 decimal places<br>100 ... 999: 1 decimal place |
| Switching status indication | 2 LED, red   |
| Operation                   | With 3 buttons and menu navigation according to VDMA 24574-1   |
| Display resolution          | 0.1 % FS   |
| Display range               | -3 ... 103 % FS  |
| Setting parameters          | See table Parameter  |


## Dimensions

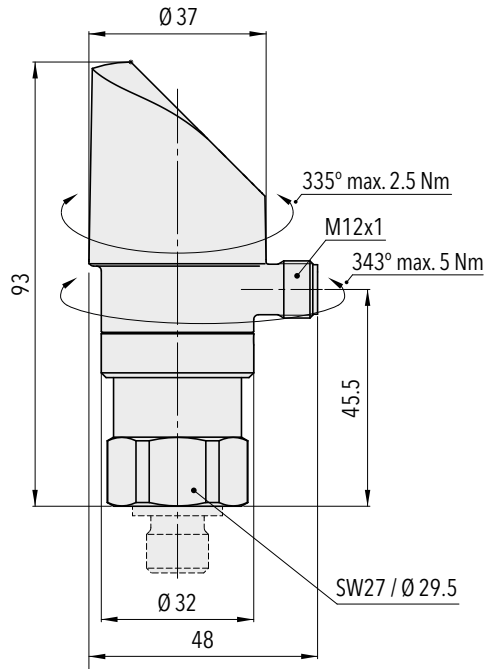


8381.XX.XXXX.35/32.XX.XX




8381.XX.XX10.XX.XX.XX




8381.XX.XX17.XX.XX.XX




8381.XX.XX19.XX.XX.XX




8381.XX.XX11.XX.XX.XX




8381.XX.XX30.XX.XX.XX




8381.XX.XX51.XX.XX.XX




8381.XX.XX31.XX.XX.XX




8381.XX.XX18.XX.XX.XX



8381.XX.XX42.XX.XX.XX



8381.XX.XX24.XX.XX.XX



8381.XX.XXXX.XX.XX.33



## Electrical connection


|  |           | Protection / electrical connection |                       |                        |                       |
|--|-----------|------------------------------------|-----------------------|------------------------|-----------------------|
|  |           | IP67 <sup>*)</sup>                 |                       |                        |                       |
|  |           | M12x1                              |                       |                        |                       |
|  |           | 5-pole4-pole<br><b>35</b>          |                       | <b>32</b>              |                       |
|  |           |                                    |                       |                        |                       |
| Output signal                          |           | <b>P1</b>                          | <b>P2</b>             | <b>P3</b>              | <b>P4</b>             |
|  | <b>PA</b> | ✓                                  | ✓                     | ✓                      |                       |
|  | <b>PU</b> | ✓                                  | ✓                     | ✓                      |                       |
|  | <b>PV</b> | ✓                                  | ✓                     | ✓                      |                       |
|  | <b>PW</b> | ✓                                  | ✓                     | ✓                      |                       |
|  | <b>PS</b> |                                    |                       |                        | ✓                     |
| Pin Configuration                      |           | <b>P1</b>                          | <b>P2</b>             | <b>P3</b>              | <b>P4</b>             |
|  |           | 1<br>3<br>2<br>4<br>5              | 1<br>3<br>5<br>4<br>2 | 1<br>3<br>2<br>4       | 1<br>3<br>-<br>4<br>2 |
|  |           | Shield <sup>***)</sup>             |                       | Shield <sup>***)</sup> |                       |
| <b>8381..XX.XXXX.XX.PA/PU/PV/PW/PS</b> |           |                                    |                       |                        |                       |

Connection of loads to switching output

<sup>\*)</sup> Provided female connector is mounted according to instructions

<sup>\*\*\*)</sup> The use of a shielded cable is recommended

## Functions switching output

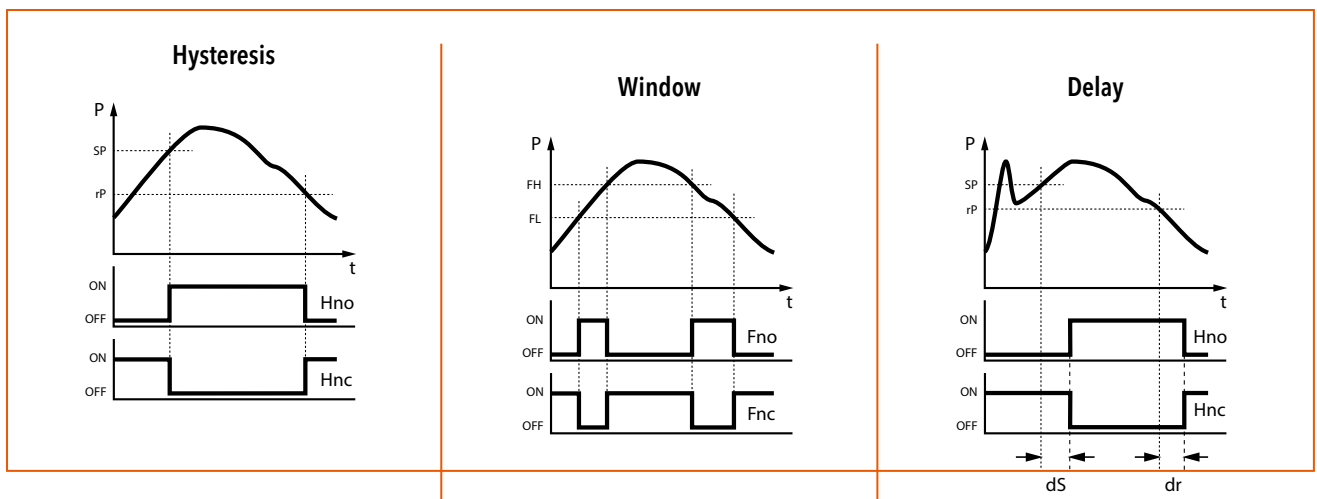

| Additional information |              |  |
|------------------------|--------------|--|
| Documents              | Data sheet   | <a href="http://www.trafag.com/H72321">www.trafag.com/H72321</a> |
|                        | Instructions | <a href="http://www.trafag.com/H73320">www.trafag.com/H73320</a> |
|                        | Flyer        | <a href="http://www.trafag.com/H70694">www.trafag.com/H70694</a> |

# DISPLAY CONTROL SWITCH

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature.



## Applications

- Shipbuilding
- Machine tools
- Hydraulics
- Process technology



## Features

- Simple adjustment of switchpoints
- Back-lit LCD-Display
- Measurement and indication of pressure (incl. switch state) and sensor temperature in various units
- High resistance to pressure cycling
- Output signal 2 relays, electrically isolated

| Technical Data       |   |                       |   |
|----------------------|---|-----------------------|---|
| Measuring principle  | Thin film on steel  | Media temperature     | -25°C ... +125°C  |
| Measuring range      | 0 ... 1 to 0 ... 600 bar  | Ambient temperature   | -25°C ... +80°C<br>(LCD display active -10°C ... +70°C) |
| Output signal        | 4 ... 20 mA, 0 ... 10 VDC<br>2 Relays, electrically isolated<br>30W (max. 1A), 36 VAC/ DC | Approval / conformity | DNV-GL  |
| Accuracy @ 25°C typ. | ± 0.5 % FS typ.   |                       |   |

Subject to change

## Ordering information/type code

|                                      |  |                        |                       | 8864 . XX | XX | XX | XX | XX | XX |
|--------------------------------------|--|------------------------|-----------------------|-----------|----|----|----|----|----|
| <b>Measuring range <sup>1)</sup></b> | <b>Pressure measurement range</b>                              | <b>Over pressure</b>   | <b>Burst pressure</b> |           |    |    |    |    |    |
|                                      | [bar]  | [bar]                  | [bar]                 |           |    |    |    |    |    |
|                                      | 0 ... 1  | 2                      | 30                    | 71        |    |    |    |    |    |
|                                      | 0 ... 2.5  | 5                      | 100                   | 75        |    |    |    |    |    |
|                                      | 0 ... 4  | 8                      | 100                   | 76        |    |    |    |    |    |
|                                      | 0 ... 6  | 12                     | 100                   | 77        |    |    |    |    |    |
|                                      | 0 ... 10   | 20                     | 200                   | 78        |    |    |    |    |    |
|                                      | 0 ... 16   | 32                     | 200                   | 79        |    |    |    |    |    |
|                                      | 0 ... 25   | 50                     | 300                   | 80        |    |    |    |    |    |
|                                      | 0 ... 40   | 80                     | 300                   | 81        |    |    |    |    |    |
|                                      | 0 ... 60   | 120                    | 500                   | 82        |    |    |    |    |    |
|                                      | 0 ... 100  | 200                    | 500                   | 83        |    |    |    |    |    |
|                                      | 0 ... 250  | 500                    | 1000                  | 74        |    |    |    |    |    |
|                                      | 0 ... 400  | 800                    | 1500                  | 84        |    |    |    |    |    |
| 0 ... 600                            | 1200   | 2000                   | 86                    |           |    |    |    |    |    |
| <b>Sensor</b>                        | Relative pressure  |                        |                       |           | 23 |    |    |    |    |
| <b>Pressure connection</b>           | G1/4" male (Seal DIN3869 and pressure peak damping element)    |                        |                       |           | 15 |    |    |    |    |
|                                      | G1/4" male (seal DIN3869)                                      |                        |                       |           | 17 |    |    |    |    |
|                                      | G1/4" female   |                        |                       |           | 10 |    |    |    |    |
|                                      | G1/2" male DIN16288-B (Manometer)                              |                        |                       |           | 11 |    |    |    |    |
|                                      | Flange connection  |                        |                       |           | 41 |    |    |    |    |
| <b>Electrical connection</b>         | Male electrical plug M12x1, 8-pole                             |                        |                       |           |    |    | 38 |    |    |
| <b>Output</b>                        | <b>Signal output</b>   | <b>Load resistance</b> | <b>U (supply)</b>     |           |    |    |    |    |    |
|                                      | 4 ... 20 mA  | ≤ 250 W                | 11 ... 32 VDC         |           |    |    |    | 19 |    |
|                                      | 0 ... 10 VDC   | ≥ 5.0 kW               | 15 ... 30 VDC         |           |    |    |    | 17 |    |
| <b>Accessories</b>                   | 2 Relays   |                        |                       |           |    |    |    |    | 23 |
|                                      | Female electrical connector: M12x1, 8-pole, incl. 2m PUR-cable |                        |                       |           |    |    |    |    |    |
|                                      | Ordering code: DCS CON   |                        |                       |           |    |    |    |    |    |

<sup>1)</sup> Customized pressure ranges upon request

## Standard products (extra short lead time)

| Product No. | Type Code                       | Pressure range [bar] | Over pressure max. [bar] | Signal output                                 | Accuracy @ 25°C typ. [%] |
|-------------|---------------------------------|----------------------|--------------------------|---|--------------------------|
| DCS2.5AR    | 8864 75 2315 38 0000 0000 19 23 | 0...2.5              | 6                        | 4...20 mA; 2 relays 30 W (max. 1 A)/36 VAC/DC | ±0.5                     |
| DCS4.0AR    | 8864 76 2315 38 0000 0000 19 23 | 0...4                | 10                       | 4...20 mA; 2 relays 30 W (max. 1 A)/36 VAC/DC | ±0.5                     |
| DCS6.0AR    | 8864 77 2315 38 0000 0000 19 23 | 0...6                | 15                       | 4...20 mA; 2 relays 30 W (max. 1 A)/36 VAC/DC | ±0.5                     |
| DCS10.0AR   | 8864 78 2315 38 0000 0000 19 23 | 0...10               | 20                       | 4...20 mA; 2 relays 30 W (max. 1 A)/36 VAC/DC | ±0.5                     |
| DCS16.0AR   | 8864 79 2315 38 0000 0000 19 23 | 0...16               | 32                       | 4...20 mA; 2 relays 30 W (max. 1 A)/36 VAC/DC | ±0.5                     |
| DCS25.0AR   | 8864 80 2315 38 0000 0000 19 23 | 0...25               | 80                       | 4...20 mA; 2 relays 30 W (max. 1 A)/36 VAC/DC | ±0.5                     |
| DCS40.0AR   | 8864 81 2315 38 0000 0000 19 23 | 0...40               | 80                       | 4...20 mA; 2 relays 30 W (max. 1 A)/36 VAC/DC | ±0.5                     |
| DCS100.0AR  | 8864 83 2315 38 0000 0000 19 23 | 0...100              | 200                      | 4...20 mA; 2 relays 30 W (max. 1 A)/36 VAC/DC | ±0.5                     |
| DCS250.0AR  | 8864 74 2315 38 0000 0000 19 23 | 0...250              | 500                      | 4...20 mA; 2 relays 30 W (max. 1 A)/36 VAC/DC | ±0.5                     |

## Additional information

| Documents |              |  |
|-----------|--------------|--|
|           | Data sheet   | <a href="http://www.trafag.com/H72605">www.trafag.com/H72605</a> |
|           | Instructions | <a href="http://www.trafag.com/H73605">www.trafag.com/H73605</a> |
|           | Flyer        | <a href="http://www.trafag.com/H70676">www.trafag.com/H70676</a> |


| Specifications                  |                                    |   |
|---------------------------------|------------------------------------|---|
| <b>Accuracy</b>                 | TEB typ. @ -25 ... +85°C           | ± 1.0 % FS typ.   |
|                                 | Accuracy @ 25°C typ.               | ± 0.5 % FS typ.   |
|                                 | NLH @ 25°C (BSL) typ.              | ± 0.25% FS typ.   |
|                                 | TC zero point and span typ.        | ± 0.01% FS/K typ.   |
|                                 | Long term stability 1 year typ.    | ± 0.2 % FS typ.   |
|                                 | Sensor temperature                 | ± 2.5°C   |
| <b>Electrical Data</b>          | Output / supply voltage            | 4 ... 20 mA: 24 (11 ... 32) VDC<br>0 ... 10 VDC: 24 (15 ... 30) VDC                         |
|                                 | Rise time                          | Typ. 1 ms / 10 ... 90 % nominal pressure  |
|                                 | Current consumption                | < 70 mA   |
| <b>Environmental conditions</b> | Media temperature                  | -25°C ... +125°C  |
|                                 | Ambient temperature                | -25°C ... +80°C<br>(LCD display active -10°C ... +70°C)                                     |
|                                 | Protection <sup>1)</sup>           | IP65  |
|                                 | Humidity                           | Max. 95 % relative  |
|                                 | Vibration                          | 10 g (25...2000 Hz)   |
|                                 | Shock                              | 50 g / 1 ms   |
| <b>EMC Protection</b>           | Emission                           | EN/IEC 61000-6-3  |
|                                 | Immunity                           | EN/IEC 61000-6-2  |
| <b>Mechanical Data</b>          | Sensor (wetted parts)              | 1.4542 (AISI630)  |
|                                 | Pressure connection (wetted parts) | Pressure ranges < 100 bar: 1.4542 (AISI630)<br>Pressure ranges ≥ 100 bar: 1.4404 (AISI316L) |
|                                 | Housing                            | 1.4301 (AISI304)  |
|                                 | Sealing                            | NBR 70 Sh   |
|                                 | Male electrical plug               | 8-pole (PA)<br>U <sub>max</sub> : 30 VAC / 36 VDC   |
|                                 | Weight                             | ~ 200 g   |
|                                 | Mounting torque                    | 25 Nm   |

<sup>1)</sup> Provided female connector is mounted according to instructions


| Display            |                               |
|--------------------|-------------------------------|
| LCD Display        | Back-lit                      |
| 4-Digit resolution | ≤ 0.2% FS                     |
| Display range      | -5 ... 125 % FS               |
| Operation          | Menu selection with 2 buttons |
| Setting parameters | See dimensions                |

| Relay output         |  |
|----------------------|--|
| Output               | 2 Relays, electrically isolated<br>30W (max.1A), 36 VAC / DC |
| Switching time       | 5 ... 9999 ms, adjustable                                    |
| Switching hysteresis | typ. 1 ... 99 % FS   |


## Dimensions

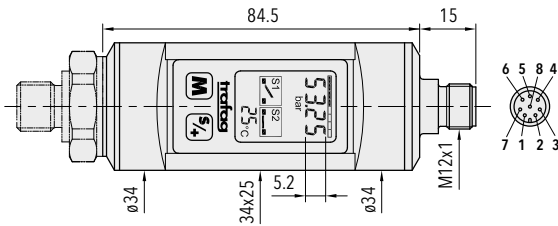


8864.XX.23XX.XX.XX.XX

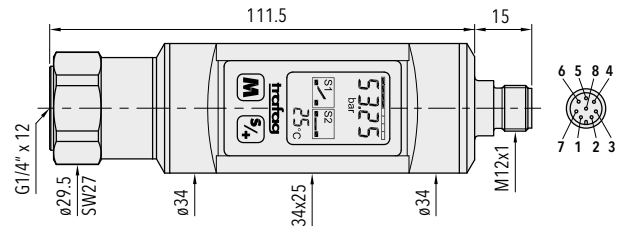


8864.XX.2310.XX.XX.XX




8864.XX.2317.XX.XX.XX




8864.XX.2315.XX.XX.XX




8864.XX.2311.XX.XX.XX




8864.XX.2341.XX.XX.XX

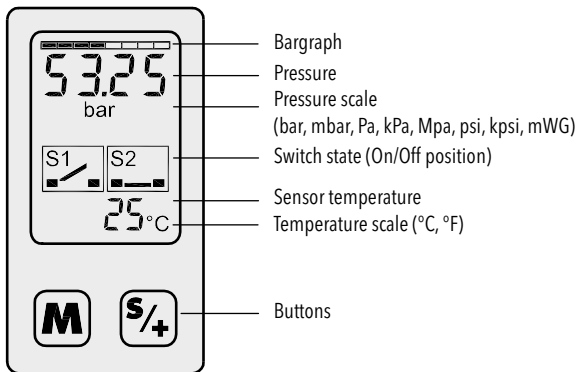


Adjustment parameters

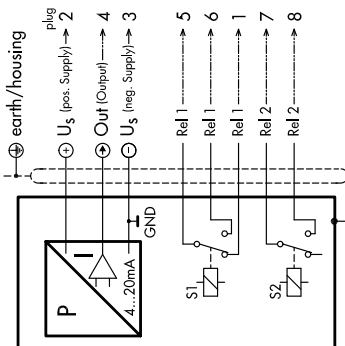

4 ... 20 mA/ 2 relays  
8864.XX.XXXX.XX.19.23

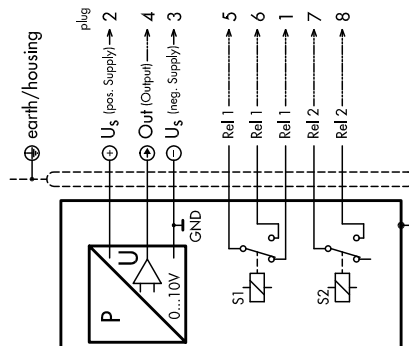

0 ... 10 VDC/ 2 Relays  
8864.XX.XXXX.XX.17.23




### DCS CON

Cable length 2 m  
Cable material PUR  
Shield on screw

- |            |          |
|------------|----------|
| 1 = white  | 5 = grey |
| 2 = brown  | 6 = pink |
| 3 = green  | 7 = blue |
| 4 = yellow | 8 = red  |



Accessories 

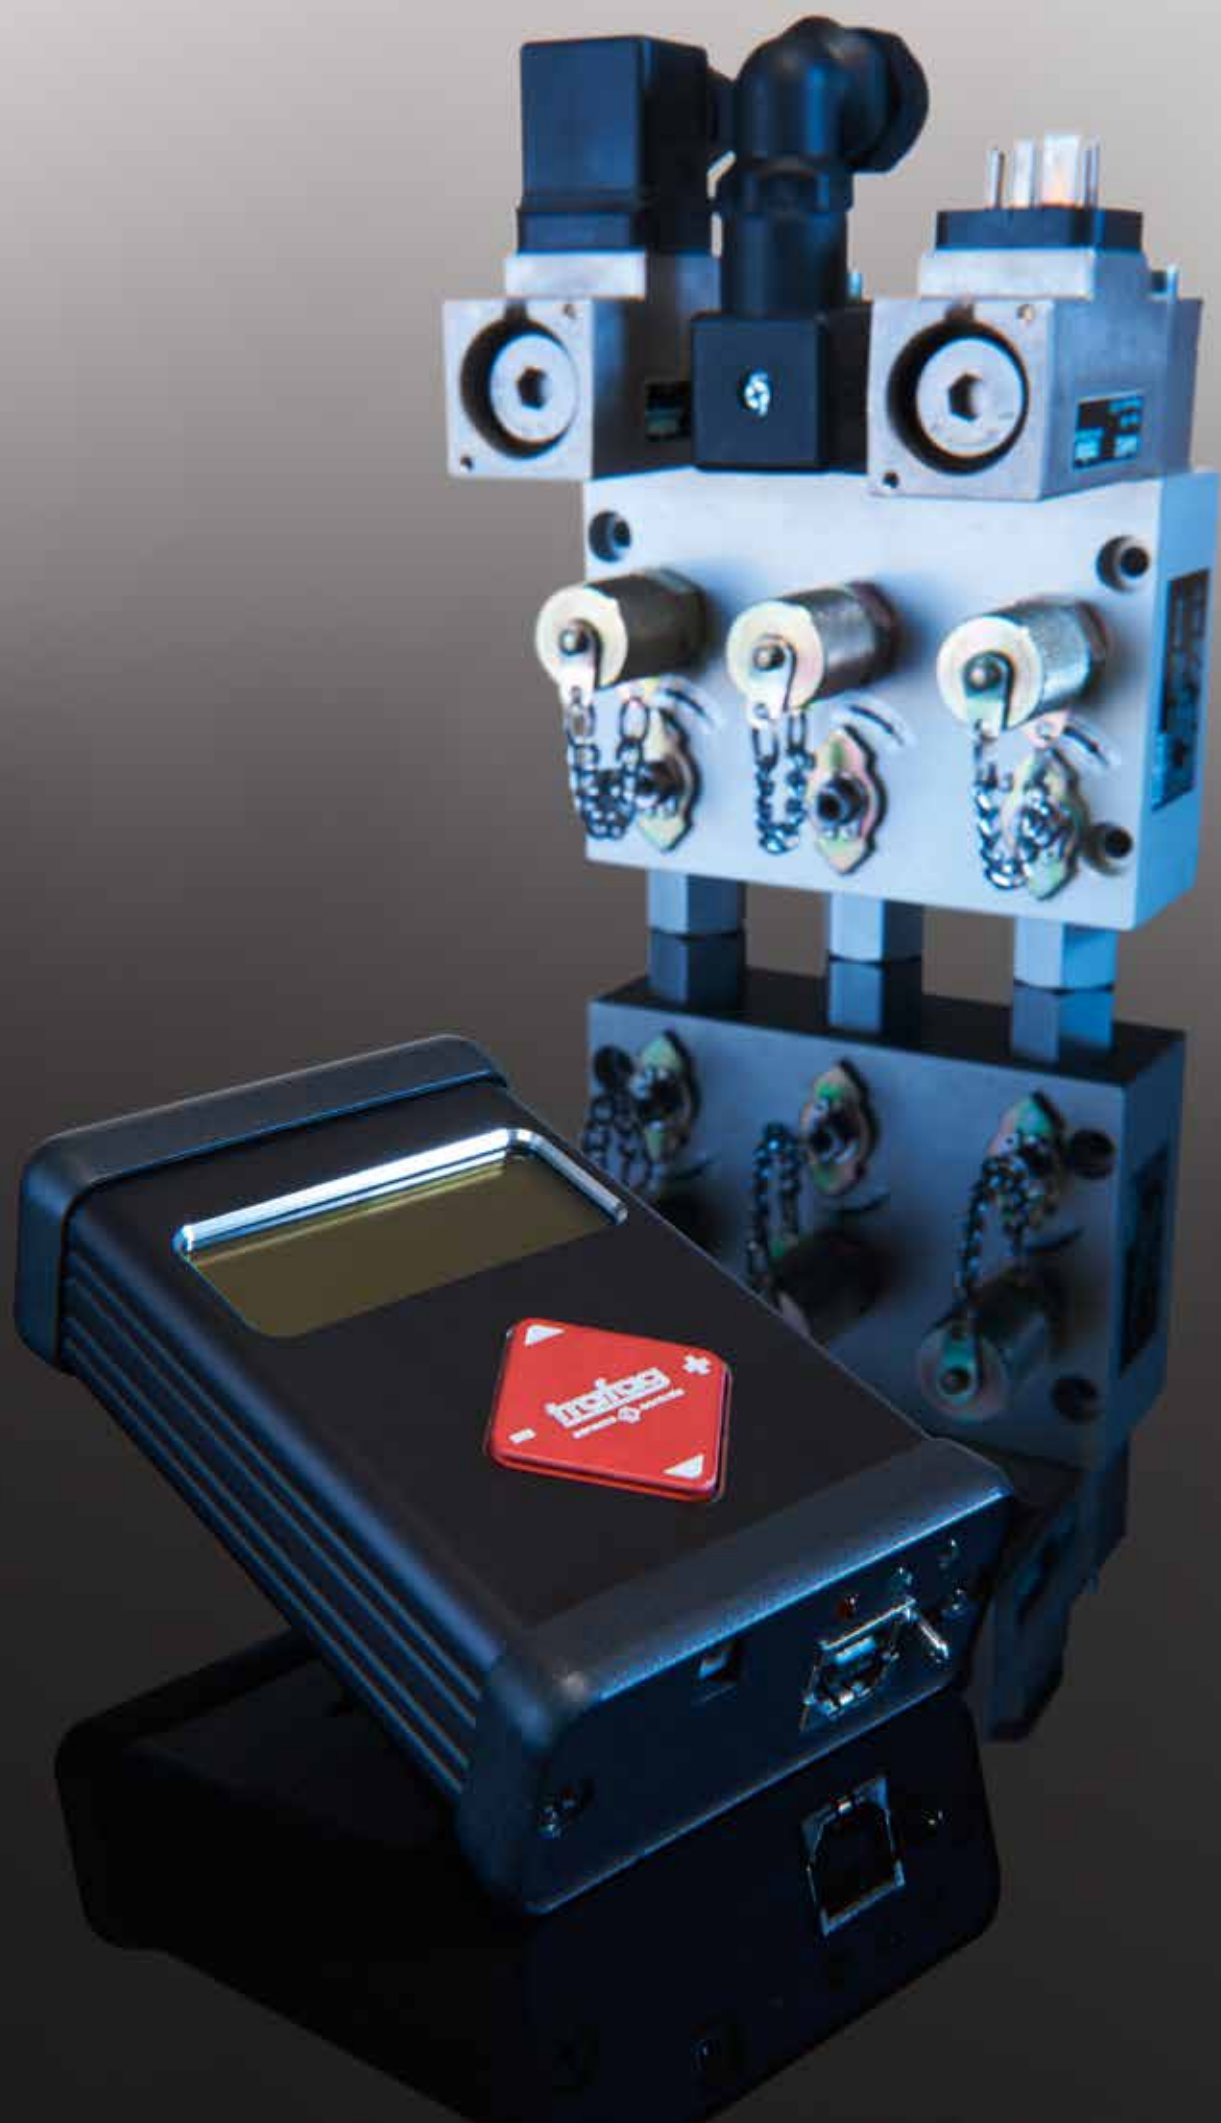




# Accessories

Trafag offers a wide range of original accessories which are ideally matched to our products. These include devices for monitoring or configuring transmitters such as hand pumps with precision pressure gauge or the Sensor Communicator, a handheld device which provides direct access to the calibration values of the transmitter in the Trafag ASIC. Trafag also offers a wide range of accessories meet specific application requirements and also make installation easier. They include diagnostic valve manifolds, snubbers and pressure peak damping elements for measuring pressure, or protective pipes for thermostats.

## Accessories for pressure measurement instruments

- SMI Sensor Master Interface
- Sensor Communicator
- CAN2USB CANopen Configuration Tool
- DVB Diagnostic Valve Block
- Hand pump with precision manometer
- Switch amplifier
- Venting box
- Cable hanger
- Pressure peak damping element
- Snubber
- Adapters for different pressure connections
- Stop valve

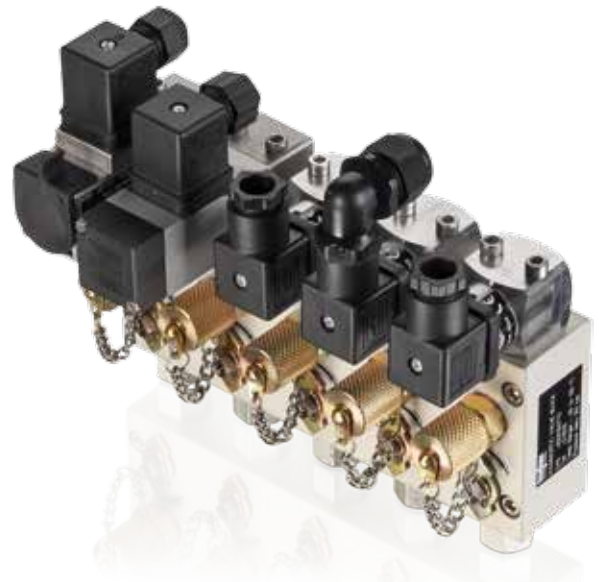

# SMI

## Sensor Master Interface

(available from the 2nd quarter of 2018)

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The Sensor Master Interface SMI is used to set parameters of electronic pressure switches such as switching points, output function and switching delay time as well as to adjust the measuring range of submersible pressure transmitters. By reading the device data, the connected pressure measurement device can be precisely identified and the parameters can be checked.



### Applications

- Supports device types NAT 8252, NAH 8254, NAR 8258, ECL 8439

### Features

- Read out of sensor data
- Set switching points with pressure switch NAX
- Set measuring range with submersible pressure transmitter ECL
- Operation via Android App «Sensor Master Communicator SMC»
- Reset pressure measuring instruments to factory settings

#### Technical Data



|                     |                                       |                       |                 |
|---------------------|---------------------------------------|-----------------------|-----------------|
| Ambient temperature | -10°C ... +40°C                       | Storage temperature   | -10°C ... +50°C |
| Supply voltage      | 5 VDC, 1 A (Supply via USB interface) | Dimensions LxBxH      | 120x76x27 mm    |
| Protection          | IP20                                  | Communication SMC/SMI | via Bluetooth   |

# SMI


## Ordering information

|  |  | Ordering-No.   |
|--|--|--|
| <b>SMI Packet containing:</b>                |  | <b>F90170</b> (available from the 2nd quarter of 2018) |
| SMI  |  |  |
| USB Bluetooth Dongle BLED                    |  | F90172   |
| Device connector SMI (5-pole, push-in)       |  | F90171   |
| Cable USB 2.0 A male, Micro-B 1.0m black     |  | F90173   |
| <b>Accessories</b>                           |  |  |
| Cable PVC, M12x1 connector                   |  | F90174   |
| Device connector SMI with housing (5-pole)   |  | F90175   |
| Case for SMI and accessories (325x248x50 mm) |  | H30782   |


## Dimensions

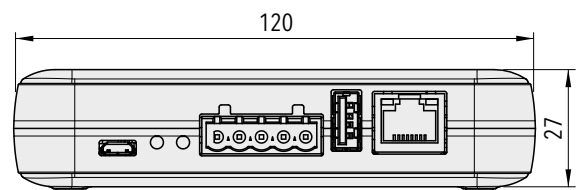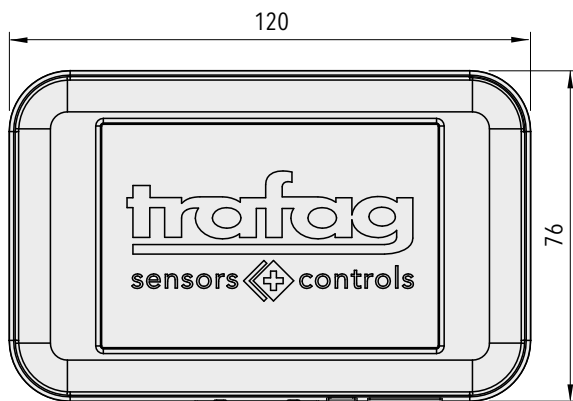

## Accessories



F90171



F90175

## Additional information

| Documents |              |  |
|-----------|--------------|--|
|           | Data sheet   | <a href="http://www.trafag.com/H72618">www.trafag.com/H72618</a> |
|           | Instructions | <a href="http://www.trafag.com/H73618">www.trafag.com/H73618</a> |
|           | Flyer        | <a href="http://www.trafag.com/H70602">www.trafag.com/H70602</a> |

# SC

## Sensor Communicator



### Features

- Read out of sensor data
- Adjustment of set point or zero point and span
- Real time pressure measuring
- Software update and battery charge with USB-interface

### Technical Data

- Identification of device data: Model, signal output, type plate, manufacturing date
- Setting of switchpoint (8320 EPN-S)
- CANopen: Setting of Node-ID and baudrate
- Reset to factory settings




Instruction [www.trafag.com/H73699](http://www.trafag.com/H73699) en  
H73698 de

### Compatible devices and adapter cables

| Model  | Connector  | 4 ... 20 mA    | Output signal                              |                                |
|--|--|----------------|--|--------------------------------|
|  |  |                | 0 ... 10 VDC<br>0 ... 5 VDC<br>1 ... 6 VDC | 0.5 ... 4.5 VDC<br>ratiometric |
| NAT (8251)<br>NAH (8253)<br>NAE (8255)<br>NSL (8257) | <b>Industrial standard</b><br>82XX.XXXX.01.XX..  | <b>SC01A</b>   | <b>SC01V</b>                               | <b>SC01R</b>                   |
|  | <b>M12, 4-pole</b><br>82XX.XXXX.32.XX..          | <b>SC32A</b>   | <b>SC32V</b>                               | <b>SC32R</b>                   |
|  | <b>M12, 5-pole</b><br>82XX.XXXX.35.XX..          | <b>SC35A</b>   | <b>SC35V</b>                               | <b>SC35R</b>                   |
| Model  | Connector  | 4 ... 20 mA    | Output signal                              |                                |
|  |  |                | CANopen<br><b>SC35CAN</b>                  | Switching output               |
| CMP (8270)   | <b>M12, 5-pole</b><br>82XX.XXXX.35.XX..          |                |  |                                |
| EPN-S (8320)   | <b>DIN43650</b><br>8320.XXXX.40.XX..             |                |  | <b>SC04SW</b>                  |
| EPR (8293)<br>EPN (8298)<br>NPN (8264)               | <b>DIN43650</b><br>82XX.XXXX.04.XX..             | <b>SC04A</b>   |  |                                |
|  | <b>DIN43650 (invers)</b><br>82XX.XXXX.04.XX.92.. | <b>SC04A92</b> |  |                                |

### Connection scheme

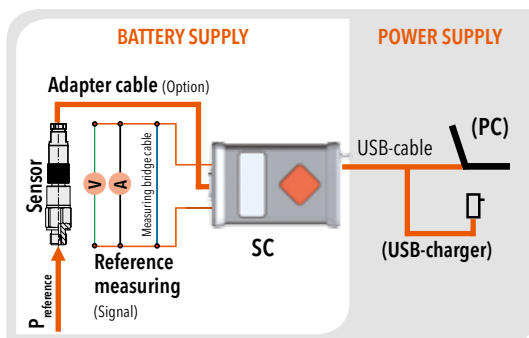

### Content of delivery:

- 1 pce SC incl. batteries
- 1 pce USB-cable
- 1 pce Measuring bridge cable
- Option: Adapter cable (see table)

# CAN2USB

## CANopen Configuration Tool



### Features

- Configuration of Trafags pressure transmitter CMP 8270 via USB
- Easy to use visual user interface
- Integrated datalogger
- Complete set available at Trafag AG
- System requirements: Windows 7, Windows 8, Windows 10, USB 2.0 or higher

### Technical Data

Configuration of CANopen devices is for non-experts a very difficult task. Common software is geared towards experts with a lot of background knowledge and routine in programming such devices. Neither the software user interface nor hardware like connectors and adapter cards are a comfortable solution for occasional users. The CMP CANopen Configuration tool, developed and produced for Trafag CMP 8270 CANopen pressure transmitter, is the perfect solution for this: Easy-to-use software interface and a USB-to-CANopen dongle. It allows configuration of all CANopen parameters and access to the complete object dictionary. Live display of the actual measurements of pressure and temperature and an integrated logger with export function offers easy monitoring of the CANopen bus communication.



Instruction

[www.trafag.com/H73617](http://www.trafag.com/H73617)



### Content of delivery:

- CAN2USB adapter
- Cable from adapter to USB
- T-connector M12 F-F-M
- Terminator 120  $\Omega$
- USB Memory stick with software and manual for CAN2USB and CMP 8270

### Recommended accessory (not included):

- CMP0.6M: CANopen Pressure Transmitter 8270 CMP with pressure range 0 ... 0.6 bar
- C29161: Pressure applicator



# DVB

## Diagnostic Valve Block

### Features

- Function tests during operation (no interruption necessary) with stop valve and test connection



### Technical Data

|                     |                  |
|---------------------|------------------|
| Pressure            | -0.8 ... 100 bar |
| Ambient temperature | -20°C ... +120°C |






Data sheet  
Instruction


[www.trafag.com/H72361](http://www.trafag.com/H72361)  
[www.trafag.com/H73361](http://www.trafag.com/H73361)

### Standard products (extra short lead time)

| Product No |                                    | Material      | Product No |                                    | Material      |
|------------|------------------------------------|---------------|------------|------------------------------------|---------------|
| DVB11      | 1 P-in, 1 test connection, 1 P-out | Al, PEEK, FPM | DVB24      | 1 P-in, 4 test connection, 4 P-out | Al, PEEK, FPM |
| DVB12      | 2 P-in, 2 test connection, 2 P-out | Al, PEEK, FPM | DVB25      | 1 P-in, 5 test connection, 5 P-out | Al, PEEK, FPM |
| DVB13      | 3 P-in, 3 test connection, 3 P-out | Al, PEEK, FPM | DVB32      | 1 P-in, 1 test connection, 2 P-out | Al, PEEK, FPM |
| DVB14      | 4 P-in, 4 test connection, 4 P-out | Al, PEEK, FPM | DVB33      | 1 P-in, 1 test connection, 3 P-out | Al, PEEK, FPM |
| DVB15      | 5 P-in, 5 test connection, 5 P-out | Al, PEEK, FPM | DVB34      | 1 P-in, 1 test connection, 4 P-out | Al, PEEK, FPM |
| DVB22      | 1 P-in, 2 test connection, 2 P-out | Al, PEEK, FPM | DVB35      | 1 P-in, 1 test connection, 5 P-out | Al, PEEK, FPM |
| DVB23      | 1 P-in, 3 test connection, 3 P-out | Al, PEEK, FPM |            |                                    |               |

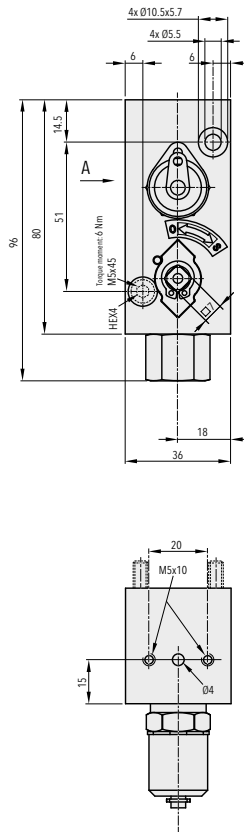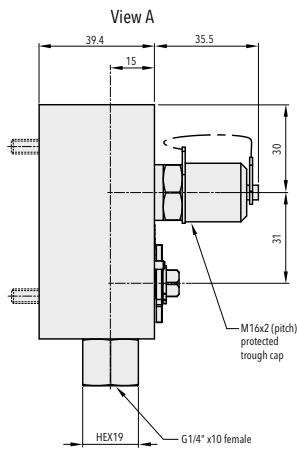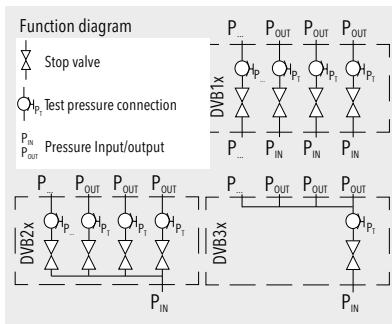


DVB11

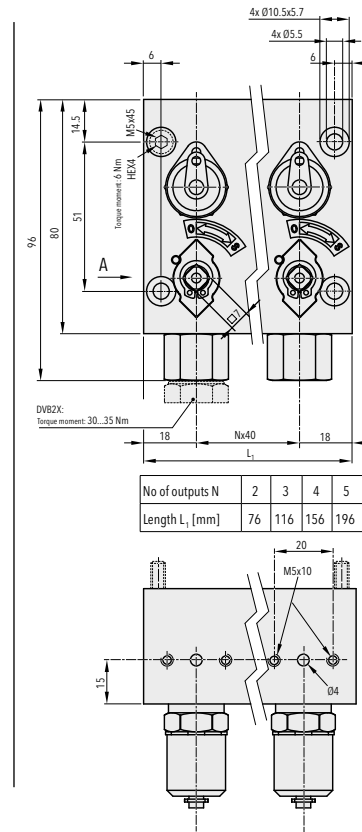

DVB X2... X5

# THP...

## Hand pump



### Features

- For testing of pressure transmitters and pressure switches

### Technical Data


Connection G1/4" female

### Standard products (extra short lead time)

| Product No | Range [bar]   |                    |
|------------|---------------|--------------------|
| THP30      | -0.85 ... +25 |                    |
| THP700     | 0 ... 700     | Resolution 0.2 bar |

# ZEN...

## Switch amplifier



### Features

- Ex II 1 G Ex ia IIC Ga
- Ex II 1 D Ex ia IIIC Da
- Ex I M1 Ex ia I Ma
- IP 20
- Output: Signal, relays

### Technical Data

Ambient temperature -20°C ... +60°C

The switch amplifier transfers digital signals from the hazardous area. Sensors per DIN EN 60947-5-6 (NAMUR) and mechanical contacts may be used as alarms. The control circuit is monitored for lead breakage (LB).

### Standard products (extra short lead time)

| Product No | Connection                    |   |
|------------|-------------------------------|---|
| ZEN24VDC   | 20 ... 30 VDC, 20 ... 23 mA   | $U_0 = 10.5\text{ V}, I_0 = 13\text{ mA}, P_0 = 34\text{ mW}$   |
| ZEN230VAC  | 207 ... 253 VAC, 45 ... 65 Hz | $U_0 = 10.6\text{ V}, I_0 = 19.1\text{ mA}, P_0 = 51\text{ mW}$ |
| ZEN28VDC   | Max. 28 VDC                   | $U_0 = 28\text{ V}, I_0 = 93\text{ mA}, P_0 = 650\text{ mW}$    |

# HIP...

## Venting box



### Features

- For all Trafag level transmitters

### Technical Data

Vented plastic housing with wire terminals to connect a submersible pressure transmitter.

### Standard products (extra short lead time)

| Product No |   | Material  |
|------------|---|---|
| HIP67      | Box 130 x 94 x 57 mm, fixing 4 x Ø 5 mm, hole pattern 115 x 79 mm | Polystyrol, not suitable for outdoor applications |

# AKL...

## Cable hanger



### Features

- For all Trafag level transmitters

### Technical Data

Cable hanger to clamp cable with diameters of 5.5 ... 9.5 mm

### Standard products (extra short lead time)

| Product No |                  | Connection                       | Material                         |
|------------|------------------|----------------------------------|----------------------------------|
| AKL5.5-9.5 | 174 x 45 x 32 mm | For cable diameters 5.5 ... 9 mm | 1.4301, PA fibreglass reinforced |



# A../D..

## Adapters with manometer pressure ports



### Features

- Pressure adapters with different thread combinations and materials for individual applications

### Technical Data

|            |   |
|------------|---|
| Material   | 1.4435 (AISI316L) / Brass                         |
| Connection | G1/4"m - G1/2"m, G1/4"m - G3/8"m, G1/4"f - G1/2"m |




Data sheet

[www.trafag.com/H72258](http://www.trafag.com/H72258)

### Standard products (extra short lead time)

| Product No |                                     | Material          |
|------------|-------------------------------------|-------------------|
| A1         | G1/4" male - G3/8" male manometer   | Brass             |
| A2         | G1/4" male - G1/2" male manometer   | Brass             |
| D1         | G1/4" male - G3/8" male manometer   | 1.4435 (AISI316L) |
| D2         | G1/4" male - G1/2" male manometer   | 1.4435 (AISI316L) |
| D4         | G1/4" female - G1/2" male manometer | 1.4435 (AISI316L) |

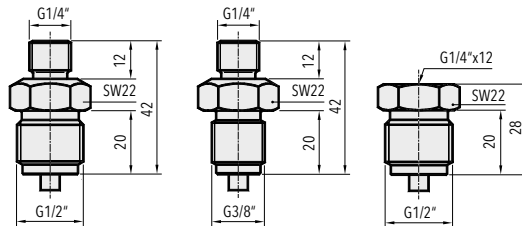

A2/D2

A1/D1

D4

# K.../F...

## Snubber



### Features

- Integrated in an adapter
- K1/K2: Pressure peak damping element integrated in an adapter

### Technical Data

|            |   |
|------------|---|
| Material   | 1.4435/316L, brass                          |
| Connection | G1/4" male - female,<br>G1/8" male - female |




Data sheet


[www.trafag.com/H72258](http://www.trafag.com/H72258)

### Standard products (extra short lead time)


| Product No |                                 | Connection          | Material          |
|------------|---------------------------------|---------------------|-------------------|
| F3         | Snubber for heavy oil           | G1/4" male - female | Brass             |
| F4         | Snubber for light oil           | G1/4" male - female | Brass             |
| F5         | Snubber for water/air           | G1/4" male - female | Brass             |
| K1         | Snubber for water/air/light oil | G1/4" male - female | 1.4435 (AISI316L) |
| K2         | Snubber for water/air/light oil | G1/8" male - female | 1.4435 (AISI316L) |
| K3         | Snubber for heavy oil           | G1/4" male - female | 1.4435 (AISI316L) |
| K4         | Snubber for light oil           | G1/4" male - female | 1.4435 (AISI316L) |
| K5         | Snubber for water/air           | G1/4" male - female | 1.4435 (AISI316L) |



K3/K4/K5  
F3/F4/F5



K1



K2

# V6/V7

## Stop valve



### Features

- Allows replacement of instruments without interruption of process (max. 40 bar)

### Technical Data

|                   |                   |
|-------------------|-------------------|
| Material          | 1.4305 / FKM      |
| Pressure          | max. 600 bar      |
| Media temperature | -25°C ... +125 °C |





Data sheet

[www.trafag.com/H72258](http://www.trafag.com/H72258)

### Standard products (extra short lead time)

| Product No |  | Connection                |
|------------|--|---------------------------|
| V6         | For water, air, light-crude, heavy oil | G1/2" male - G1/4" female |
| V7         | For water, air, light-crude, heavy oil | G1/4" male - G1/4" female |



# DAMP...

## Pressure peak damping element



### Features

- Retrofit kit with integrated M5 male thread
- Hole diameter 0.4 mm, 1.0 mm
- Set of 5 pcs.

### Technical Data

|          |                   |
|----------|-------------------|
| Material | 1.4435 (AISI316L) |
|----------|-------------------|




Data sheet

[www.trafag.com/H72258](http://www.trafag.com/H72258)

### Standard products (extra short lead time)

| Product No |   | Material          |
|------------|---|-------------------|
| DAMP1.0    | With 1.0 mm hole, for heavy oil           | 1.4435 (AISI316L) |
| DAMP0.4    | With 0.4 mm hole, for water and light oil | 1.4435 (AISI316L) |



# Terminology for pressure measurement instruments

## Relevant standards

DIN 16086, IEC 61298-2

### Instrument types

#### Pressure sensors

Membranes with elements applied whose physical properties change when the membranes deform (strain gauges with changing resistance, for example).

#### Pressure transmitters

Transmitters for converting the pressure to be measured into a defined or standardised analogue and/or digital output signal.

#### Pressure transducers

Pressure sensors that have a process connection and electrical connection (e.g. connector) but do not convert pressure into a standardised electrical signal like a pressure transmitter.

### Types of pressure measurement

#### Differential pressure measurement

The measurement of differential pressure of two different pressures. The measuring instrument has two pressure connections.

#### Absolute pressure measurement

The measuring result is always the deviation to the absolute zero (vacuum).


e.g. 4 mA = 0 bar (= vacuum); zero point (ZP): 0 bar

#### Relative pressure measurement DIN 16086: overpressure


The measuring result is always the deviation to the current, absolute atmospheric pressure.

e.g. 4 mA = 960 mbar (= atmospheric pressure); zero point (ZP): 0 bar

### Relative pressure measurement

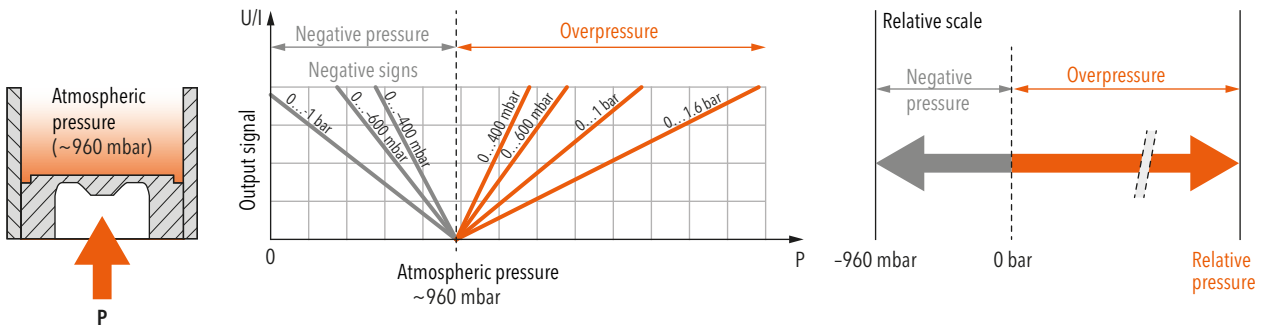

### Absolute pressure measurement

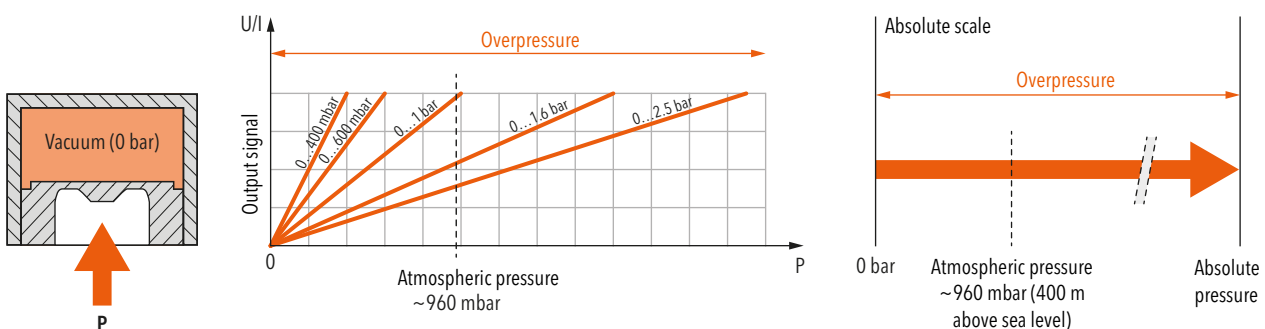

# Terminology for pressure measurement instruments

## Main features

### Nominal pressure measuring range

Range between the upper and lower limits of the size measured (operating pressure). The specified accuracy remains within this range.

### Measuring span

Algebraic difference between the upper and lower limit values of a certain measuring range.


### Overpressure Max. working pressure

Highest pressure specified by manufacturer for which the pressure transformer is designed at maximum temperature. The pressure transformer can be loaded up to this pressure without the guaranteed metrological properties having changed after going back into the measuring range. However, there is no longer a clear link between pressure and output signal in the range between nominal pressure and overpressure.

### Burst pressure

Pressure value (static) at which the measuring instrument suffers permanent damage. The instrument can withstand pressures up to this value without bursting and will not leak any measuring medium.

## Example

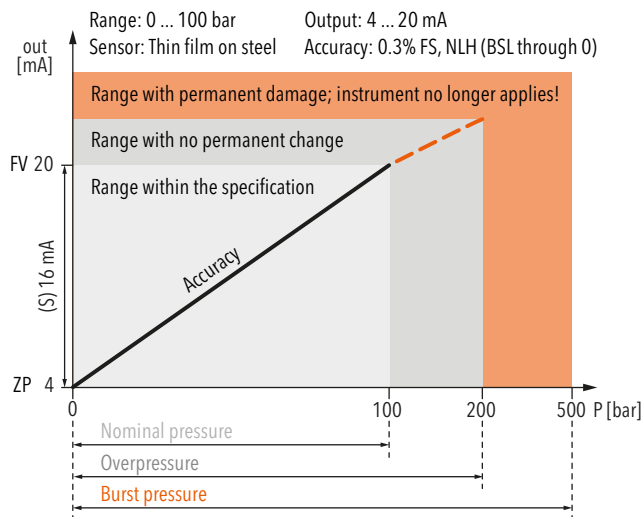

## Accuracy

### Typ. accuracy

(Typical) Mostly corresponds to the 1-sigma value of the normal distribution, i.e. approx. 68.3%. Generally, well over 75% of all Trafag instruments meet this typical measured value.


### Max. accuracy

(maximum) 100% of all instruments meet this maximum measured value.

### Non-linearity

The largest deviation from the effective characteristic line of an ideal reference line. The reference line can be defined as a limit point adjustment, a BSL or a BSL through 0.


## Specifications: Non-linearity, Hysteresis

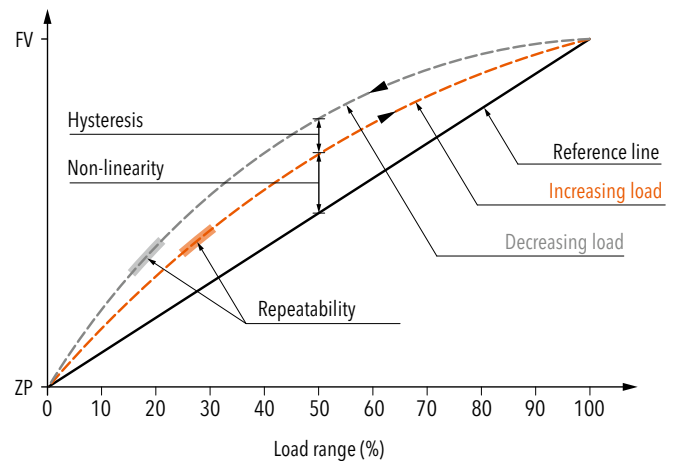

### BSL Best Straight Line

The reference line according to the BSL or the minimum value adjustment is placed in such a way that the maximum positive and negative deviations are as small as possible.

## Specifications: Accuracy NLH (BSL)

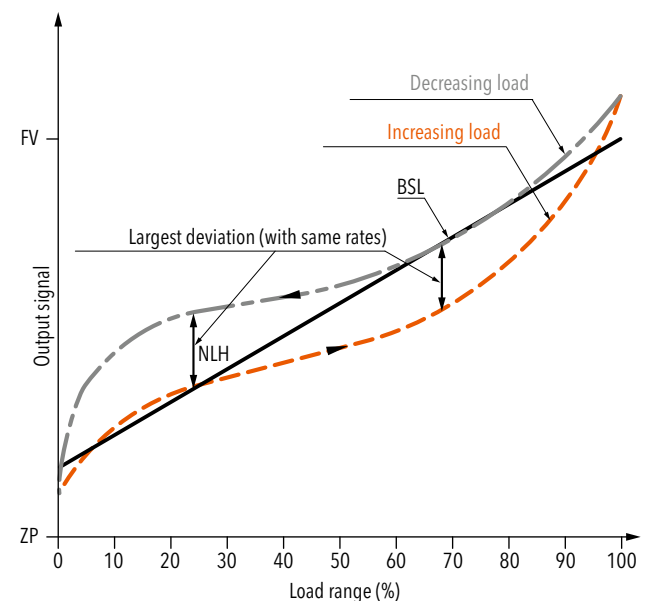


# Terminology for pressure measurement instruments

## BSL through zero

As an additional requirement for the minimum value adjustment, the BSL through zero (also BSL/0) must go straight through zero or the origin.

## Specifications: Accuracy NLH (BSL through zero)

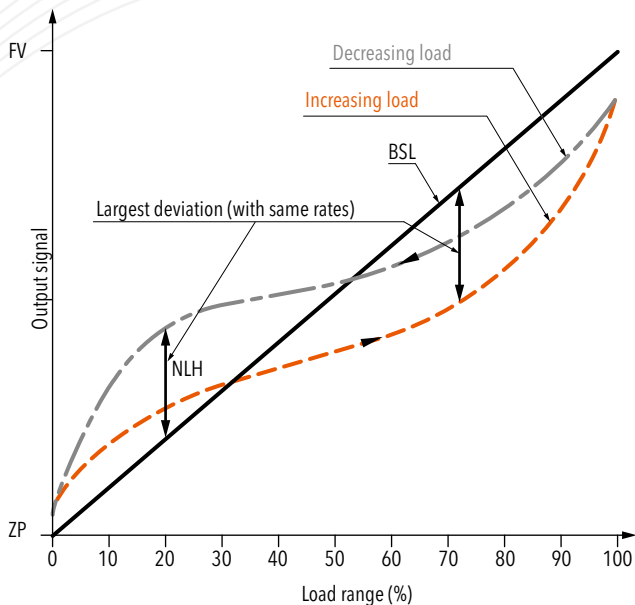

## Non-linearity according to limit point adjustment

The reference line runs through the origin and end point of the characteristic line. Non-linearity indicates the greatest deviations from this line.

## Hysteresis

Property of an instrument for yielding different output values in relation to its input values, which are dependent on the effective direction in which the input values are created (acc. to IEC 61298-2).

## Pressure hysteresis

The difference that occurs at the same pressure between measurements in the direction of increasing and then decreasing pressure.

## Temperature hysteresis

Maximum change of the zero point and output span for the pressure signal after specified temperature cycle over the operating temperature range.

## NLH non-linearity and hysteresis

Largest deviation from the ideal characteristic line (BSL, BSL/0 or limit point). In pressure measuring instruments, the non-linearity and pressure hysteresis are given together at a constant temperature.

## Accuracy DIN 16086: Measurement deviation

The accuracy denoted in the standard DIN 16086 with measurement deviation (at 25°C reference temperature) includes all deviations as a result of non-linearity, hysteresis, non-repeatability, zero point (start of measuring range) errors and span (end of measuring range) errors. Zero point errors and span errors also include the measuring uncertainty of the configuration ensemble.

## Repeatability DIN 16086: Non-repeatability

Deviation of the output signals with same input signals under identical (established) application conditions.

## Temperature coefficient TC

Change of measured value for zero point and span as a result of changes in temperature.

## Long-term stability Long-term drift

The change of accuracy due to aging under certain reference conditions during a certain period of time, typically 1 year.

## TEB Total error band

Total error (root from sum of the square of the deviations) due to measurement deviations (accuracy) and temperature influence (temperature coefficient TC). The temperature influence is usually given in the information from Trafag across a range larger than that given in the standard (-10 ... +60 °C). Whilst DIN 16086 also continues to add to the long-term stability over a year, the information from Trafag is subject to ex-works conditions for obvious reasons.

## Scale accuracy

For pressostats: Deviation arising from the manual switch point adjustment with the help of the display (scale).

## Electrical Data

### Output signal

Electrical signal that emits the value of the measurement size for further processing

### Rise time Step response

The time it takes for an output signal after a severe pressure change to increase from 10% to 90% of its final value that results from the change in pressure.

### Zero point ZP

Output signal in the pressureless state ( $P_{\min}$ ), e.g. 4 mA at 0 bar ( $P_{\min}$ ).

# Terminology for pressure measurement instruments

## Final value FV

Output value of the largest pressure value in the nominal pressure range ( $P_{max}$ ), e.g. 20 mA at 100 bar ( $P_{max}$ ).

## Span S

Final value (FV) - zero point (ZP) = span (S)  
e.g. span (S) = (FV) 20 mA - (ZP) 4 mA = 16 mA

## Switching differential Pressostats

Range within which the micro-switch in pressostats switches on and off

Example:

X...X = adjustable value

X - X = non-adjustable value; runs proportional to the nominal pressure

X = fixed value

## Limiter Pressostats

Pressostat with manual micro-switch reset.

## Environmental conditions

### Media temperature

Permissible temperature range of the measuring media.

### Operating temperature Ambient temperature

Temperature range in which the measuring instrument adheres to its specifications. As the electronics in certain instruments are more sensitive to temperature than the sensor element, the maximum ambient temperature for the instrument is lower than the permissible media temperature.

### Storage temperature

Temperature range in which the measuring instrument can be stored or transported without permanently changing the measuring characteristics.

### Protection

Humidity and dust shield according to IP classes in accordance with EN 60529.

## EMC Protection

### EMC Electromagnetic compatibility

Instrument property for functioning in an environment with electromagnetic interference and for not unduly influencing this environment (to which other equipment also belongs).

### Immision

Immunity to external electromagnetic disturbances.

### Emission

Interference emission from electromagnetic disturbances.

### Surge

Immunity to unipolar surge voltages that can occur due to surges as a result of switching operation and lighting.

### Burst

Immunity to recurring, rapid, transient electrical disturbances.

# Information on Ex products

Trafag offers a wide range of EX-, ATEX- and IECEx approved products for pressure and temperature monitoring. These products provide reliable functionality in various hazardous zones, with a guaranteed safety operation. In addition to both CE and ATEX-conformance, Trafag products are also extremely fail-safe.

## CE - Designation and labelling

**CE** 1258 **Ex** **II 2** **GD**

Control No. of notified body for the supervision of the quality assurance system

I: Mining  
II: All other applications

Category (see below)

G = Gas  
D = Dust

- Category 1: Can be used in zone 0 (gas) and 20 (dust)
  - Potentially explosive atmosphere: Permanent
  - Two independent failures – safety
- Category 2: Can be used in zone 1 (gas) and 21 (dust)
  - Potentially explosive atmosphere: Regularly
  - One failure – safety
- Category 3: Can be used in zone 2 (gas) and 22 (dust)
  - Potentially explosive atmosphere: Unlikely or for very short time

## IEC/EN 60079-8 – Gases

**Ex ia IIC T6 Ga**

Type of protection

Equipment groups (for gases)

Temperature class

Equipment protection level

- Type of protection: Intrinsically safe
- Equipment group (gases): IIC = Hydrogen, Acetylene
- Temperature level: Defines ignition temperature and permissible temperature of equipment surface
- Protection level: Referring to installation zone (Ga = Zone 0 = Category 1 in ATEX)

## IEC/EN 60079-0 – Dust

**Ex ia IIIC IP6X T130 °C Da**

Type of protection

Equipment groups (for dust)

IP protection

Surface temperature

Equipment protection level

- Type of protection: Intrinsically safe, powder filling, encapsulation, ...
- Equipment group (dust): IIIC = Conductive dust
- Temperature level: Defines maximum surface temperature
- Protection level: Referring to installation zone (Da = Zone 20 = Category 1 in ATEX)

## EN 50303 – Mining

**Ex ia I Ma**

Type of protection

Equipment for mining

Equipment protection level

- Category and Protection level:
  - Category M1 / Protection level Ma: Fully functional and safe when explosive atmosphere is present. Requires means to cope with two independent failures
  - Category M2 / Protection level Mb: These products are intended to be deenergised in the presence of an explosive atmosphere









# Conversion of pressure units

|                                   | bar                    | mbar            | Pa<br>N/m <sup>2</sup> | kPa<br>kN/m <sup>2</sup> | MPa<br>MN/m <sup>2</sup> | at<br>kp/cm <sup>2</sup> | atm                    | mmWS<br>mmCE          | mWS<br>mCE             | Torr<br>mm Hg | psi<br>lbf/in <sup>2</sup> |
|-----------------------------------|------------------------|-----------------|------------------------|--------------------------|--------------------------|--------------------------|------------------------|-----------------------|------------------------|---------------|----------------------------|
| <b>1 bar</b>                      | 1                      | 1000            | 10 <sup>5</sup>        | 100                      | 0.1                      | 1.02                     | 0.987                  | 1.02·10 <sup>4</sup>  | 10.2                   | 750           | 14.5                       |
| <b>1 mbar</b>                     | 0.001                  | 1               | 100                    | 0.1                      | 10 <sup>-4</sup>         | 1.02·10 <sup>-3</sup>    | 0.987·10 <sup>-3</sup> | 10.2                  | 0.0102                 | 0.75          | 0.0145                     |
| <b>1 Pa 1 N/m<sup>2</sup></b>     | 10 <sup>-5</sup>       | 0.01            | 1                      | 0.001                    | 10 <sup>-6</sup>         | 1.02·10 <sup>-5</sup>    | 0.987·10 <sup>-5</sup> | 0.102                 | 1.02·10 <sup>-4</sup>  | 0.0075        | 1.45·10 <sup>-4</sup>      |
| <b>1 kPa 1 kN/m<sup>2</sup></b>   | 0.01                   | 10              | 1000                   | 1                        | 0.001                    | 0.0102                   | 9.87·10 <sup>-3</sup>  | 102                   | 0.102                  | 7.5           | 0.145                      |
| <b>1 MPa 1 MN/m<sup>2</sup></b>   | 10                     | 10 <sup>4</sup> | 10 <sup>6</sup>        | 1000                     | 1                        | 10.2                     | 9.87                   | 1.02·10 <sup>5</sup>  | 102                    | 7500          | 145                        |
| <b>1 at 1 kp/cm<sup>2</sup></b>   | 0.981                  | 981             | 0.981·10 <sup>5</sup>  | 98.1                     | 0.0981                   | 1                        | 0.968                  | 10 <sup>4</sup>       | 10                     | 736           | 14.22                      |
| <b>1 atm</b>                      | 1.013                  | 1013            | 1.013·10 <sup>5</sup>  | 101.3                    | 0.1013                   | 1.033                    | 1                      | 1.033·10 <sup>4</sup> | 10.332                 | 760           | 14.696                     |
| <b>1 mmWS 1mmCE</b>               | 0.981·10 <sup>-4</sup> | 0.098           | 9.807                  | 9.81·10 <sup>-3</sup>    | 9.81·10 <sup>-6</sup>    | 10 <sup>-4</sup>         | 0.968·10 <sup>-4</sup> | 1                     | 0.001                  | 0.0736        | 1.422·10 <sup>-3</sup>     |
| <b>1 mWS 1mCE</b>                 | 0.0981                 | 98.07           | 9807                   | 9.81                     | 9.81·10 <sup>-3</sup>    | 0.1                      | 0.0968                 | 1000                  | 1                      | 73.6          | 1.422                      |
| <b>1 Torr 1 mmHg</b>              | 1.133·10 <sup>-3</sup> | 1.333           | 133.323                | 0.133                    | 1.333·10 <sup>-4</sup>   | 1.36·10 <sup>-3</sup>    | 1.316·10 <sup>-3</sup> | 13.595                | 1.359·10 <sup>-2</sup> | 1             | 1.934·10 <sup>-2</sup>     |
| <b>1 psi 1 lbf/in<sup>2</sup></b> | 6.895·10 <sup>-2</sup> | 68.95           | 6895                   | 6.895                    | 6.895·10 <sup>-3</sup>   | 7.031·10 <sup>-2</sup>   | 0.06805                | 703.1                 | 0.7031                 | 51.7          | 1                          |

# Conversion of temperature units

| [°F] to [°C]<br>Formula: °C = 5/9·(°F - 32) |       |     |       |     |       |
|---|-------|-----|-------|-----|-------|
| °F  | °C    | °F  | °C    | °F  | °C    |
| -100  | -73.3 | 105 | 40.6  | 315 | 157.2 |
| -95   | -70.6 | 110 | 43.3  | 320 | 160.0 |
| -90   | -67.8 | 115 | 46.1  | 325 | 162.8 |
| -85   | -65.0 | 120 | 48.9  | 330 | 165.6 |
| -80   | -62.2 | 125 | 51.7  | 335 | 168.3 |
| -75   | -59.4 | 130 | 54.4  | 340 | 171.1 |
| -70   | -56.7 | 135 | 57.2  | 345 | 173.9 |
| -65   | -53.9 | 140 | 60.0  | 350 | 176.7 |
| -60   | -51.1 | 145 | 62.8  | 355 | 179.4 |
| -55   | -48.3 | 150 | 65.6  | 360 | 182.2 |
| -50   | -45.6 | 155 | 68.3  | 365 | 185.0 |
| -45   | -42.8 | 160 | 71.1  | 370 | 187.8 |
| -40   | -40.0 | 165 | 73.9  | 375 | 190.6 |
| -35   | -37.2 | 170 | 76.7  | 380 | 193.3 |
| -30   | -34.4 | 175 | 79.4  | 385 | 196.1 |
| -25   | -31.7 | 180 | 82.2  | 390 | 198.9 |
| -20   | -28.9 | 185 | 85.0  | 395 | 201.7 |
| -15   | -26.1 | 190 | 87.8  | 400 | 204.4 |
| -10   | -23.3 | 195 | 90.6  | 405 | 207.2 |
| -5  | -20.6 | 200 | 93.3  | 410 | 210.0 |
| 0   | -17.8 | 205 | 96.1  | 415 | 212.8 |
| 5   | -15.0 | 210 | 98.9  | 420 | 215.6 |
| 10  | -12.2 | 215 | 101.7 | 425 | 218.3 |
| 15  | -9.4  | 220 | 104.4 | 430 | 221.1 |
| 20  | -6.7  | 225 | 107.2 | 435 | 223.9 |
| 25  | -3.9  | 230 | 110.0 | 440 | 226.7 |
| 30  | -1.1  | 235 | 112.8 | 445 | 229.4 |
| 32  | 0     | 240 | 115.6 | 450 | 232.2 |
| 35  | 1.7   | 245 | 118.3 | 455 | 235.0 |
| 40  | 4.4   | 250 | 121.1 | 460 | 237.8 |
| 45  | 7.2   | 255 | 123.9 | 465 | 240.6 |
| 50  | 10.0  | 260 | 126.7 | 470 | 243.3 |
| 55  | 12.8  | 265 | 129.4 | 475 | 246.1 |
| 60  | 15.6  | 270 | 132.2 | 480 | 248.9 |
| 65  | 18.3  | 275 | 135.0 | 485 | 251.7 |
| 70  | 21.1  | 280 | 137.8 | 490 | 254.4 |
| 75  | 23.9  | 285 | 140.6 | 495 | 257.2 |
| 80  | 26.7  | 290 | 143.3 | 500 | 260.0 |
| 85  | 29.4  | 295 | 146.1 | 505 | 262.8 |
| 90  | 32.2  | 300 | 148.9 | 510 | 265.6 |
| 95  | 35.0  | 305 | 151.7 | 515 | 268.3 |
| 100   | 37.8  | 310 | 154.4 | 520 | 271.1 |

| [°C] to [°F]<br>Formula: °F = 9/5·(°C + 32) |      |     |     |     |     |
|---|------|-----|-----|-----|-----|
| °C  | °F   | °C  | °F  | °C  | °F  |
| -100  | -148 | 105 | 221 | 315 | 599 |
| -95   | -139 | 110 | 230 | 320 | 608 |
| -90   | -130 | 115 | 239 | 325 | 617 |
| -85   | -121 | 120 | 248 | 330 | 626 |
| -80   | -112 | 125 | 257 | 335 | 635 |
| -75   | -103 | 130 | 266 | 340 | 644 |
| -70   | -94  | 135 | 275 | 345 | 653 |
| -65   | -85  | 140 | 284 | 350 | 662 |
| -60   | -76  | 145 | 293 | 355 | 671 |
| -55   | -67  | 150 | 302 | 360 | 680 |
| -50   | -58  | 155 | 311 | 365 | 689 |
| -45   | -49  | 160 | 320 | 370 | 698 |
| -40   | -40  | 165 | 329 | 375 | 707 |
| -35   | -31  | 170 | 338 | 380 | 716 |
| -30   | -22  | 175 | 347 | 385 | 725 |
| -25   | -13  | 180 | 356 | 390 | 734 |
| -20   | -4   | 185 | 365 | 395 | 743 |
| -15   | 5    | 190 | 374 | 400 | 752 |
| -10   | 14   | 195 | 383 | 405 | 761 |
| -5  | 23   | 200 | 392 | 410 | 770 |
| 0   | 32   | 205 | 401 | 415 | 779 |
| 5   | 41   | 210 | 410 | 420 | 788 |
| 10  | 50   | 215 | 419 | 425 | 797 |
| 15  | 59   | 220 | 428 | 430 | 806 |
| 20  | 68   | 225 | 437 | 435 | 815 |
| 25  | 77   | 230 | 446 | 440 | 824 |
| 30  | 86   | 235 | 455 | 445 | 833 |
| 32  | 89.6 | 240 | 464 | 450 | 842 |
| 35  | 95   | 245 | 473 | 455 | 851 |
| 40  | 104  | 250 | 482 | 460 | 860 |
| 45  | 113  | 255 | 491 | 465 | 869 |
| 50  | 122  | 260 | 500 | 470 | 878 |
| 55  | 131  | 265 | 509 | 475 | 887 |
| 60  | 140  | 270 | 518 | 480 | 896 |
| 65  | 149  | 275 | 527 | 485 | 905 |
| 70  | 158  | 280 | 536 | 490 | 914 |
| 75  | 167  | 285 | 545 | 495 | 923 |
| 80  | 176  | 290 | 554 | 500 | 932 |
| 85  | 185  | 295 | 563 | 505 | 941 |
| 90  | 194  | 300 | 572 | 510 | 950 |
| 95  | 203  | 305 | 581 | 515 | 959 |
| 100   | 212  | 310 | 590 | 520 | 968 |

# Trafag international

## Europe

### ■ Headquarters, Switzerland

Trafag AG  
Industriestrasse 11  
CH - 8608 Bubikon  
Tel. +41 44 922 32 32  
www.trafag.com  
e-mail: trafag@trafag.com

### ■ Albania, Bosnia-Herzegovina, Macedonia, Montenegro, Serbia, Slovenia

Axo-Texcomp Services SA  
P.O. Box 88  
CH - 1164 Buchillon  
Tel. +41 21 807 22 01  
mbucher@axotex.ch

### ■ Austria

Trafag GmbH  
Konrad-Doppelmayr-Strasse 17  
AT - 6922 Wolfurt  
Tel. +43 5574 20866  
www.trafag.at  
e-mail: trafagat@trafag.com

### ■ Belgium

Marktechnical B.V.B.A.  
Boxtelstraat 11  
BE - 2320 Hoogstraten  
Tel. +32 3 311 8864  
www.marktechnical.be  
e-mail: info@marktechnical.be

### ■ Croatia

#### Albania, Bosnia-Herzegovina, Macedonia, Montenegro, Serbia, Slovenia

VARGA ELEKTRONIK d.o.o.  
Draškovićevo 12  
Draškovec  
HR - 40323 Prelog  
Tel. +385 40 643 189  
www.varga-elektronik.hr  
e-mail: info@varga-elektronik.hr

### ■ Cyprus

ACTech Ltd.  
60 Mesologiu Str, 185-45  
GR - Piraeus  
Tel. +30 210 4630 825  
www.actech.gr  
e-mail: actech1@otenet.gr

### ■ Czech Republic

Trafag spol. s r.o.  
Vilémovská 2129  
CZ - 347 01 Tachov  
Tel. +420 374 723 250  
www.trafag.cz  
e-mail: prodej@trafag.com

### ■ Denmark

OEM Automatic Klitsø A/S  
Engholm Parkvej 4  
DK - 3450 Allerød  
Tel. +45 70 10 64 00  
www.oemklitsø.dk  
e-mail: info@oemklitsø.dk

### ■ Estonia, Latvia

Wermundsen OÜ  
Pärnu mnt. 142  
EE - 11317 Tallinn  
Tel. +372 601 4202  
www.wermundsen.ee  
e-mail: wermundsen@wermundsen.ee

### ■ Finland

Wexon OY  
Turvekuja 6  
FI - 00700 Helsinki  
Tel. +358 9 290 440  
www.wexon.com  
e-mail: wexon@wexon.fi

### ■ France

Trafag S.A.R.L.  
2 Boulevard Westinghouse  
FR - 93270 Sevran  
Tel. +33 1 4863 0101  
www.trafag.fr  
e-mail: trafagfr@trafag.com

### ■ Germany

Trafag GmbH  
Kelterstrasse 59  
DE - 72669 Unterensingen  
Tel. +49 7022 40590-0  
www.trafag.de  
e-mail: info@trafag.de

### ■ Great Britain

Trafag (UK) Ltd.  
Units 12&14, Josselin Court,  
Josselin Road  
Burnt Mills Industrial Estate  
GB - Basildon, Essex SS13 1QF  
Tel. +44 1 268 727 172  
www.trafag.co.uk  
e-mail: enquiries@trafag.co.uk

### ■ Greece

ACTech Ltd.  
60 Mesologiu Str, 185-45  
GR - Piraeus  
Tel. +30 210 4630 825  
www.actech.gr  
e-mail: actech1@otenet.gr

### ■ Hungary

OEM Automatic Kft.  
Gyár u.2.  
HU - 2040 Budaörs  
Tel. +36 23 880 895  
www.oemautomatic.hu  
e-mail: info@oemautomatic.hu

### ■ Iceland

Samey ehf.  
Lyngas 13  
IS - 210 Gardabaer  
Tel. +354 510 5200  
www.samey.is  
e-mail: sala@samey.is

### ■ Italy

Trafag Italia S.r.l.  
c/o Tecnocity Altomilanese  
Via Cremona, 1  
IT - 20025 Legnano (MI)  
Tel. +39 0 331 592 397  
www.trafagitalia.com  
e-mail: info@trafagitalia.com

### ■ Netherlands

Marktechnical B.V.  
Lage Ham 172-178  
P.O. Box 324 / 5100 AH Dongen  
NL - 5102 AE Dongen  
Tel. +31 162 31 42 85  
www.marktechnical.nl  
e-mail: info@marktechnical.nl

# Trafag international

## Europe

### ■ Norway

Stork AS  
Brynsveien 100  
NO - 1352 Kolsås  
Tel. +47 67 17 64 00  
www.stork.no  
e-mail: stork@stork.no

### ■ Poland

POLTRAF Sp. z o. o.  
ul. Bysewska 26C  
PL - 80-298 Gdańsk  
Tel. +48 58 557 52 07  
Tel. +48 58 557 52 23  
www.poltraf.com  
e-mail: info@poltraf.com.pl

### ■ Portugal

Contimetra Instrumentos Industriais Lda.  
Rua do Proletariado, 15-B  
Portela de Carnaxide  
PT - 2790-138 Carnaxide  
Tel. +351 214 203 900  
www.contimetra.com  
e-mail: industria@contimetra.com

### ■ Romania

Synchro Comp s.r.l.  
ID Sarbu street no. 13 Camin 3  
RO - Craiova 200561 Dolj  
Tel. +40 317 800 000  
www.synchro.ro  
e-mail: office@synchro.ro

### ■ Russia

POLTRAF CIS  
Lyubotinsky pr. 5  
RU - 196105 St.-Petersburg  
Tel. +7 812 244 94 24  
www.poltraf.ru  
e-mail: info@poltraf.ru

### ■ Spain

Trafag España S.L.  
Parque Tecnológico Bizkaia  
Edificio 101 - E  
ES - 48170 Zamudio (Bizkaia)  
Tel. +34 94 641 40 63  
www.trafag.es  
e-mail: info@trafag.es

### ■ Sweden

Regal Components AB  
Lefflersgatan 1  
SE - 754 50 Uppsala  
Tel. +46 18 657 000  
www.regal.se  
e-mail: info@regal.se

### ■ Switzerland

see 'Headquarters'  
Tel. +41 44 922 32 32  
www.trafag.com  
e-mail: trafag@trafag.com

### ■ Turkey

Alfa Elektronik Sensor Sanayi Ve Ticaret A.S.  
Tuzla Kimya Sanayicileri O.S.B  
Melek Aras Bulvari No: 67  
TR - 34956 Tuzla-ISTANBUL  
Tel. +90 216 399 44 04  
www.alfasanayi.com  
www.trafag.com.tr  
e-mail: info@alfasanayi.com

### ■ Ukraine

Soliton Ltd.  
19, Akademika Tupoleva str  
UA - 04128 Kiev  
Tel. +38 (044) 223 9843  
www.soliton.com.ua  
e-mail: soliton@soliton.com.ua

# Trafag international

## Asia

### China

#### Engines, Shipbuilding: Entire China

Marinequip China Co., Ltd.  
Room 1306A, 13.F, Jiaxing Building  
877 Dong Fang Road  
CN - Shanghai 200122  
Tel. +86 21 6445 2545  
e-mail: xuzhun@marinequip.com.cn

#### Engines:

Entire China  
Shanghai SKY Trading Co., Ltd.  
Bond Shanghai Office  
Rm. 24D, Unit.2,  
No. 1251 Jiangnan Rd  
CN - Shanghai 200060  
Tel: +86 21 6276 1312  
www.sky-trading.com.cn  
e-mail: bondwu@sky-trading.com.cn

#### General Industry:

Entire China  
Beijing Macrosense Co., Ltd  
The 2nd Floor, Building 60, No. 2  
Jingyuanbeijie,  
Yizhuang Economic Development Zone,  
Daxing District,  
CN - Beijing 100176  
Tel. +86 10 8260 1626/8260 1361  
Mobile +86 1370 103 7546  
www.bjhjd.com.cn  
e-mail: wanggui@macrosense.cn

#### SF6 Gas Density Monitoring:

Entire China  
ETIC Electrical Equipment Co., Ltd.  
A610 Pioneering Square,  
No. 48 Keji Road,  
CN - Xi'an 710075  
Tel. +86 29 8799 9981/2/3  
www.etic.cn  
e-mail: info@etic.cn

### India

Trafag Controls India Pvt. Ltd.  
Plot no-248, Sector-7  
IMT Manesar  
IN - Gurgaon-122050,  
Haryana  
Tel. +91 124 404 47 20  
www.trafag.com  
e-mail: trafagindia@trafag.com

### Indonesia

Please contact our headquarters  
Switzerland  
Tel. +41 44 922 32 32  
www.trafag.com  
e-mail: trafag@trafag.com

### Iran

Jannatpour & Sadeghzadeh Trading Group  
No. 257 South Lalehzar Street  
IR - Tehran  
Tel. +98 21 3397 5059  
www.persian-automation.com  
e-mail: info@persian-automation.com

### Israel

Timcon Technologies Systems Ltd  
3, Josef Levi St.  
Industrial Zone P.O.B. 1057  
IL - Kiryat Bialik 27110  
Tel. +972 4 8742605  
www.timcon.co.il  
e-mail: timcon@timcon.co.il

### Japan

Trafag Japan Co., Ltd.  
2-13-5 Shiba Daimon  
Minato-ku  
JP - Tokyo 105-0012  
Tel. +81 3 6435 7506  
www.trafag.jp  
e-mail: trafagjapan@trafag.com

### Korea

Hwajin Enterprise Co., Ltd.  
25, Mieumsandan 2-ro  
Gangseo-gu  
KR - Busan (46748)  
Tel. +82 51 831 9447  
www.trafagkorea.com  
e-mail: hwa-jin@hwa-jin.com

### Malaysia

SENSING Process Instruments Sdn Bhd  
30, Jalan 30/119A  
Taman Taynton View, Cheras,  
MY - 56000 Kuala Lumpur  
Tel. +603 9235 1038  
www.sensing.com.my  
e-mail: info@sensing.com.my

### Philippines

West Point Engineering Supplies  
West Point Building, Bacood Street,  
Barangay Patubig  
Marilao Bulacan  
Philippines 3019  
Tel. +63 44 797 2524  
www.westpointengineering.com.ph  
sales@westpointengineering.com.ph

### Singapore

#### General Industry:

IndCon Technology (S) Pte. Ltd.  
Blk 2021 Bukit Batok St 23 #04-210  
SG - Singapore 659526  
Tel. +65 6908 4838  
www.indcontechtechnology.com  
e-mail: sales@indcontechtechnology.com

### Singapore

#### Shipbuilding:

Bond Instrumentation (S) Pte. Ltd.  
8 Gul Street 3  
SG - Singapore 629265  
Tel. +65 68 651 800  
www.bond.com.sg  
e-mail: bondsales@bond.com.sg

### Taiwan

Daybreak International (Taiwan) Corp.  
3 F, No.124, Chung-Cheng Road,  
Shihlin 11145  
TW - Taipei  
Tel. +886 2 8866 1234  
www.daybreak.com.tw  
e-mail: day111@ms23.hinet.net

### Thailand

Themtech Co., Ltd.  
127 Soi Srimuang-Anusorn  
Sutthisarnvinijchai Rd., Dindaeng  
TH - Bangkok 10400  
Tel. +662 693 6629  
www.primusthai.com  
e-mail: sales@themtech.co.th



# Trafag international

## Asia

### ■ United Arab Emirates

Abdulla Bin Hamid Trading LLC  
Po Box 30495  
AE - Dubai  
Tel. +971 4 2241464  
www.accutech.ae  
e-mail: sales@accutech.ae

### ■ Vietnam

GNN Co. Ltd  
33 Hoa Hong 2, Ward 2  
Nhu Nhuan Dist. HCMC  
Tel. +84 8 3517 4923  
www.gnnvietnam.com  
e-mail: contact@gnnvietnam.com

## America

### ■ USA

Trafag, Inc.  
8848 Red Oak Boulevard, Ste. I  
US - Charlotte, NC 28217  
Tel. +1 704 343 6339  
www.trafag.us  
e-mail: salesus@trafag.com

### ■ Canada

Indumart Inc.  
25 Denison Street  
CA - Markham, L3R 1B5,  
Ontario  
Tel. +1 905 944 9998  
www.indumart.com  
e-mail: sales@indumart.com

## South America

### ■ Brazil

G&M Comercio de Produtos Ltda.  
Rua Senador Queiros, 165  
BR - 09050-300 Santo Andre - São Paulo  
Tel. +55 11 4425-4245  
www.gmtestemedicao.com.br  
e-mail: vendas@gmtestemedicao.com.br

Sense Eletrônica  
Rua Tuiuti 1237  
BR - 03081-012 Tatuapé São Paulo SP  
Tel. +55 11 2145-0421  
www.sense.com.br  
www.trafag.com.br  
e-mail: vendas@sense.com.br

### ■ Colombia

Surti Industria S.A.S  
Carrera 33 No 38 A Sur 46  
Envigado - Antioquia  
Tel. +57 4 3 34 3283  
www.surtiindustria.com.co  
e-mail: surtiindustria@une.net.co

## Africa

### ■ South Africa

ICS (Pty) Ltd.  
Instrumentation & Control Systems  
1 Claerhout Crescent  
ZA - Sasolburg, 1947 RSA  
Tel. +27 82 900 83 12  
www.instcon.co.za  
e-mail: info@instcon.co.za

## Australia, Oceania

### ■ Australia

Dart Instruments Pty. Ltd.  
250 Military Road  
AU - Neutral Bay NSW 2089  
Tel. +61 2 8456 7550  
www.trafag.com.au  
e-mail: sales@dartinstruments.com.au

### ■ New Zealand

Eurotec Limited  
750C Great South Road  
Penrose  
P.O. Box 14543  
NZ - Panmure Auckland  
Tel. +64 9 579 1990  
www.eurotec.co.nz  
e-mail: sales@eurotec.co.nz

# Reliable quality

Worldwide represented, globally trusted, Swiss based



## ■ Headquarters


Switzerland

## ■ Subsidiaries

Austria  
Czech Republic  
France  
Germany  
Great Britain  
India  
Italy  
Japan  
Poland (Joint Venture)  
Russia (Joint Venture)  
Spain  
USA

## ■ Representatives

Australia  
Belgium  
Brazil  
Canada  
China  
Colombia  
Croatia  
Cyprus  
Denmark  
Estonia, Latvia  
Finland  
Greece  
Hungary  
Iceland  
Indonesia  
Iran  
Israel  
Korea  
Malaysia  
Netherlands  
New Zealand  
Norway  
Philippines  
Portugal  
Romania  
Singapore  
South Africa  
Sweden  
Taiwan  
Thailand  
Turkey  
Ukraine  
United Arab Emirates  
Vietnam

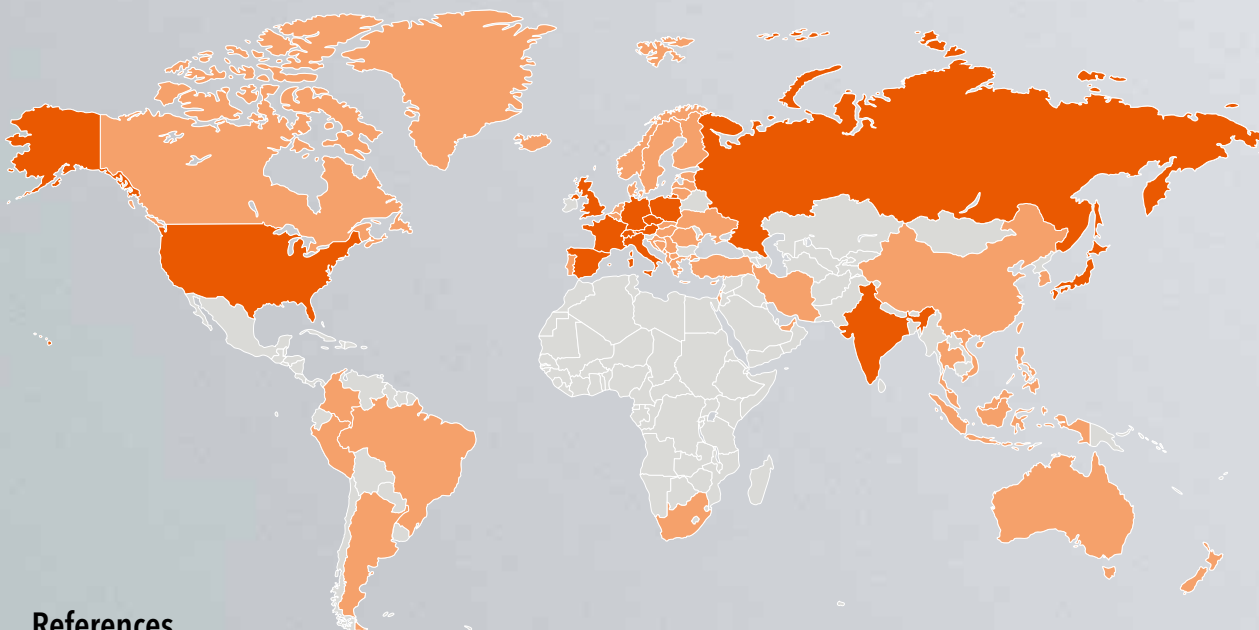

## References

ABB | AIT | AKG | Alstom | Areva T&D | Atos | AVL | Benninghoven | Bharat Heavy Electrical | Blohm & Voss | Bombardier | Bosch Rexroth | BMW Rolls-Royce  
Bühler | Caterpillar | Charmilles | Dalian Marine Diesel Ltd. | Detroit Diesel | Deutsche Bahn AG | Doosan Group | Dräger | Electrolux | Elektrobudowa S.A.  
Faiveley | Fincantieri | Flender | Goninan | Greenfield | G&W | Hermetic Pumpen | Roche | Hudong Heavy Machinery | Hyundai Heavy Industries | IAV  
Ingersoll Rand | Iveco | KOMA | MAN B&W | Melag | Mitsubishi | MTU | Noske-Kaeser | Oilon | Ormat Turbines | Parker | PESA | Philips | PKN Orlen S.A.  
PMC | Polarteknik | Promeco | Queensland Rail | Reintjes | Renk | Rolls-Royce | Schindler | Schneider Electric | Schottel | Sciteq-Hammel | Siemens | SNCF  
STX Heavy Industries | Thermax Limited | Toshiba | Trumpf | Verolme Shipyard | Vesta | Viessmann | Voith | Wärtsilä | Westfalia Separator | W&H  
Yichang Marine Diesel Ltd | York | ZF Marine