


# CSD *Series Drives*

PRELIMINARY

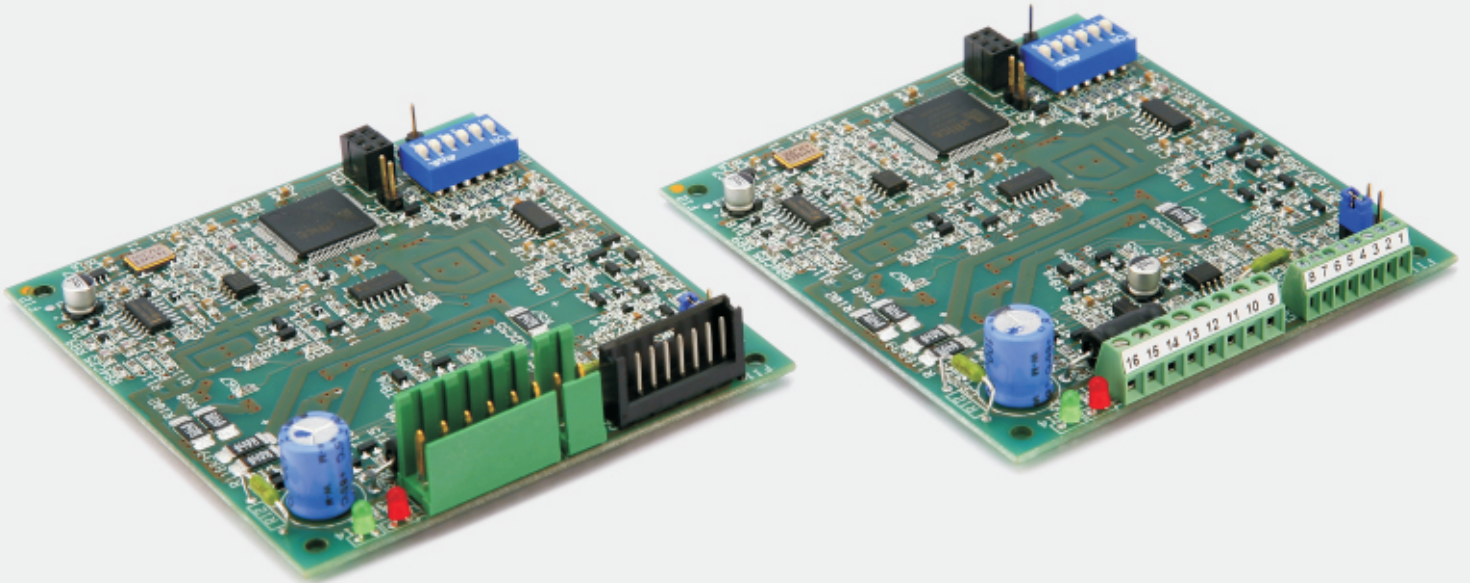

## GENERAL DESCRIPTION

**CSD** is the name of a series of *ministep* bipolar chopper drives, suitable for driving two-phase stepping motors, with four, six or eight terminals.

**CSD** series drives are realized in 92 x 85 x 23 mm format and are equipped with separated connectors for logic signals and for power connections. They are designed for easy mounting inside a metal electrical cabinet, by means of spacers or mounting brackets separately supplied by R.T.A. as an option.

The *ministep* operation, connected with a further electronic resonance damping facility, ensures excellent operating smoothness and low acoustic noise.

Pull-up and pull-down input signals ease interfacing with the most commonly used control systems.

R.T.A. experience, together with a careful design for these specific purposes, has led to a high reliability component, in spite of its very competitive cost.



**Motion Control Systems**

## TECHNICAL FEATURES

PRELIMINARY

- ▶ Range of operation voltages from 24 to 45 VDC.
- ▶ Operation at 400, 800, 1600, 3200 steps/revolution.
- ▶ Motor phase current setting by means of a DIP-SWITCH. Up to eight possible values, between **0.6 A** and **4.4 A**, can be set.
- ▶ Pull-up or Pull-down inputs can be set.
- ▶ Two versions are available: with quick connection, crimp-type, or screw-type connectors.
- ▶ Automatic current reduction at motor standstill.
- ▶ Possibility to switch off motor current with an external logic signal.
- ▶ Protection against short circuit at motor outputs, under-voltage and over-voltage.
- ▶ Operation with a single external supply voltage.
- ▶ High efficiency CHOPPER with MOSFET final stage output.
- ▶ Electronic damping facility for further acoustic noise and mechanic vibrations reduction at low and medium speed.
- ▶ Compact, easy to use and cost effective solution.

Models	V <sub>DC</sub> range	I <sub>NF</sub> min.	I <sub>NF</sub> max.	Dimensions
	(VOLT)	(AMP)	(AMP)	(mm.)
CSD 02 (CSD 02.V)*	from 24 to 45	0.7	2.4	92x85x22
CSD 04 (CSD 04.V)*	from 24 to 45	2.6	4.4	92x85x23

\* CSD 02.V and CSD 04.V versions are equipped with screw-type connectors.

